



Department of Alternative
Energy Development and Efficiency
MINISTRY OF ENERGY

LAM PHRA PHLOENG HYDROPOWER PROJECT
AMPHOE PAK THONG CHAI CHANGWAT NAKHON RATCHASIMA

ELECTRO-MECHANICAL EQUIPMENT

VOLUME 2

TECHNICAL SPECIFICATIONS



FRONTIER ENGINEERING CONSULTANTS CO., LTD.

JANUARY 2019

LAM PHRA PHLOENG HYDROPOWER PROJECT

SUPPLY AND INSTALLATION OF ELECTRO-MECHANICAL POWER PLANT EQUIPMENT

VOLUME 2 : TECHNICAL SPECIFICATIONS

CONTENTS

	PAGE
SECTION 1 GENERAL	1-1
SECTION 2 TURBINES AND GOVERNORS	2-1
SECTION 3 INLET VALVE	3-1
SECTION 4 TESTS FOR TURBINE, GOVERNOR INLET VALVE AND AUXILIARIES, TURBINE MODEL TEST, TURBINE FIELD EFFICIENCY TEST	4-1
SECTION 5 MECHANICAL AUXILIARY EQUIPMENT	5-1
SECTION 6 TESTS FOR MECHANICAL AUXILIARY EQUIPMENT	6-1
SECTION 7 GENERATORS AND AUXILIARIES	7-1
SECTION 8 AC STATION SERVICE TRANSFORMERS AND AC SWITCH BOARD	8-1
SECTION 9 GENERATOR TERMINAL CUBICLES, BUS DUCTS AND NEUTRAL CUBICLES	9-1
SECTION 10 DC STATION SERVICES	10-1
SECTION 11 CONTROL, PROTECTION AND ALARM SYSTEM	11-1
SECTION 12 MAIN TRANSFORMERS	12-1
SECTION 13 LINE PROTECTION	13-1
SECTION 14 COMMUNICATION SYSTEM	14-1
SECTION 15 GROUNDING SYSTEM	15-1
SECTION 16 ELECTRICAL AUXILIARY EQUIPMENT	16-1

LAM PHRA PHLOENG HYDROPOWER PROJECT

SUPPLY AND INSTALLATION OF ELECTRO-MECHANICAL POWER PLANT EQUIPMENT

VOLUME 2 : TECHNICAL SPECIFICATIONS

CONTENTS

PAGE

SECTION 1 - GENERAL

S1.01	GENERAL	1-1
S1.02	SERVICE CONDITIONS	1-1
S1.03	REGULATIONS AND STANDARDS	1-1
S1.04	UNITS OF MEASUREMENTS	1-3
S1.05	MAINTENANCE TOOLS AND INSTRUMENTS	1-4
S1.06	SPARE PARTS	1-5
S1.07	ERECTION, OPERATION AND MAINTENANCE INSTRUCTIONS	1-6
S1.08	DRAWING	1-10
S1.09	PACKING	1-11
S1.10	PHOTOGRAPHS	1-12
S1.11	LABELS	1-13
S1.12	PAINTING	1-14
S1.13	LOCKING FACILITIES	1-17
S1.14	TROPICALIZATION	1-17
S1.15	MISCELLANEOUS METALWORK	1-18
S1.16	EMBEDMENT, FOUNDATIONS AND PLINTHS	1-19
S1.17	POSITION OF INSTRUMENTS, CONTROLS AND HANDWHEELS	1-20
S1.18	FABRICATION AND WELDING	1-20
S1.19	PIPING, VALVES AND THREADED FASTENERS	1-23
S1.20	CASTING AND PATTERNS	1-26
S1.21	LUBRICATION	1-26
S1.22	SELF-LUBRICATING BUSHES	1-27
S1.23	TEST, GENERAL REQUIREMENTS	1-27
S1.24	ELECTRICAL EQUIPMENT	1-30
S1.25	OPERATOR TRAINING	1-35

SECTION 2 - TURBINES AND GOVERNORS

S2.01	SCOPE OF WORK	2-1
S2.02	TURBINE	2-1
S2.03	GOVERNOR	2-12

CONTENTS (Cont'd)

	PAGE
SECTION 3 - INLET VALVE	
S3.01 TYPE AND CONSTRUCTION	3-1
S3.02 OPERATION	3-1
S3.03 CONTROL AND INDICATION	3-2
S3.04 BYPASS VALVE	3-2
S3.05 DISMANTLING JOINT AND CLOSING PIECE	3-3
S3.06 PRESSURE CONDUIT AND TURBINE DRAIN SYSTEMS	3-3
SECTION 4 -TESTS FOR TURBINE, GOVERNOR INLET VALVE AND AUXILIARIES, TURBINE MODEL TEST, TURBINE FIELD EFFICIENCY TEST	
S4.01 TESTS FOR TURBINE, GOVERNOR, INLET VALVE AND AUXILIARIES	4-1
S4.02 TURBINE FIELD EFFICIENCY TEST	4-4
SECTION 5 - MECHANICAL AUXILIARY EQUIPMENT	
S5.01 UNIT COOLING WATER SYSTEM	5-1
S5.02 COMPRESSED AIR SYSTEM	5-3
S5.03 VENTILATION AND AIR-CONDITIONING SYSTEMS	5-5
S5.04 POWERHOUSE WATER DRAINAGE SYSTEM	5-5
S5.05 PORTABLE FIRE EXTINGUISHERS	5-6
S5.06 OVERHEAD TRAVELING CRANE	5-7
S5.07 DIESEL-DRIVEN STANDBY ELECTRIC POWER SYSTEM	5-12
SECTION 6 - TESTS FOR MECHANICAL AUXILIARY EQUIPMENT	
S6.01 TEST DURING MANUFACTURE	6-1
S6.02 TESTS AT SITE	6-1
S6.03 TESTS DURING MANUFACTURE FOR POWERHOUSE CRANE	6-3
S6.04 TESTS AT SITE FOR POWERHOUSE CRANE	6-3
SECTION 7 - GENERATORS AND AUXILIARIES	
S7.01 GERATORS	7-1
S7.02 SHAFT AND BEARINGS	7-10
S7.03 SIGNAL GENERATOR	7-14
S7.04 EXCITATION SYSTEM	7-14
S7.05 INSPECTION AND TESTS	7-16

CONTENTS (Cont'd)

	PAGE
 SECTION 8 - AC STATION SERVICE TRANSFORMERS AND AC SWITCH BOARD	
S8.01 SCOPE OF WORK	8-1
S8.02 PURPOSE AND FUNCTION	8-1
S8.03 100-KVA TRANSFORMERS	8-1
S8.04 HIGH VOLTAGE LOAD INTERRUPTING SWITCH (NOT APPLICABLE)	8-3
S8.05 AUTOMATIC TRANSFER SCHEME	8-4
S8.06 NO-FUSE BREAKER	8-6
S8.07 SECONDARY WIRING AND TERMINALS	8-6
S8.08 CONTROL SWITCHES AND INDICATION	8-7
S8.09 INTERLOCKING	8-7
S8.10 CURRENT TRANSFORMERS	8-7
S8.11 VOLTAGE TRANSFORMERS (NOT APPLICABLE)	8-8
S8.12 INSTRUMENT SECTIONS	8-8
S8.13 GROUNDING	8-10
S8.14 NAMEPLATES	8-10
S8.15 CHANNEL BASES AND BOLTS	8-10
S8.16 TESTS	8-10
 SECTION 9 - GENERATOR TERMINAL CUBICLES, BUS DUCTS AND NEUTRAL CUBICLES	
S9.01 SCOPE OF WORK	9-1
S9.02 PURPOSE AND FUNCTION	9-1
S9.03 STANDARDS	9-1
S9.04 GENERATOR CIRCUIT BREAKER CUBICLES AND BUS DUCTS RATINGS	9-2
S9.05 EQUIPMENT DETAILS	9-2
S9.06 DESIGN AND CONSTRUCTION OF GENERATOR TERMINAL CUBICLES	9-5
S9.07 DESIGN AND CONSTRUCTION OF GENERATOR NEUTRAL CUBICLES	9-7
S9.08 WIRING AND WIRING TROUGHS	9-8
S9.09 TESTS	9-8
 SECTION 10 - DC STATION SERVICES	
S10.01 SCOPE OF WORK	10-1
S10.02 PURPOSE AND FUNCTION	10-1
S10.03 BATTERY	10-1
S10.04 BATTERY RACKS	10-2

CONTENTS (Cont'd)

	PAGE
S10.05 INSTRUMENT ON DC DISTRIBUTION BOARD	10-2
S10.06 BATTERY CHARGER	10-3
S10.07 DISTRIBUTION PANEL BOARD	10-4
S10.08 CABLE INTERCONNECTION	10-5
S10.09 TESTS	10-5

SECTION 11 - CONTROL, PROTECTION AND ALARM SYSTEM

S11.01 GENERAL	11-1
S11.02 CONTROL SYSTEM REQUIREMENTS	11-13
S11.03 PROTECTION DESIGN REQUIREMENTS	11-15
S11.04 GROUP OPERATION INDICATOR	11-20
S11.05 FAULT INDICATOR AND AUDIBLE ALARM SYSTEM	11-20
S11.06 CONTROL AND PROTECTION CUBICLES	11-20
S11.07 TESTS	11-28

SECTION 12 - MAIN TRANSFORMERS

S12.01 SCOPE OF WORK	12-1
S12.02 PURPOSE AND FUNCTION	12-1
S12.03 STANDARDS	12-1
S12.04 TYPE OF TRANSFORMER	12-1
S12.05 MEGAVOLT AMPERE RATING	12-1
S12.06 VOLTAGE RATINGS, CONNECTIONS AND TAPS	12-2
S12.07 INSULATION LEVELS	12-2
S12.08 IMPEDANCE AND LOSSES	12-2
S12.09 SHORT CIRCUIT CAPABILITY	12-2
S12.10 SOUND LEVEL	12-2
S12.11 HIGH FREQUENCY INTERFERENCE	12-3
S12.12 BUSHINGS AND CONNECTORS	12-3
S12.13 OFF-LOAD TAP CHANGER	12-4
S12.14 CONSTRUCTION	12-4
S12.15 BASE	12-5
S12.16 TRANSFORMER TANK OR CORRUGATED TANK	12-6
S12.17 CONSERVATOR TANK (IF SELECTED)	12-6
S12.18 RADIATORS OR CORRUGATED TANK	12-6
S12.19 CONTROL	12-6
S12.20 OIL	12-7
S12.21 ACCESSORIES	12-7
S12.22 TESTS	12-7

CONTENTS (Cont'd)

	PAGE
SECTION 13 - LINE PROTECTION	
S13.01 SCOPE OF WORK	13-1
S13.02 PURPOSE AND FUNCTION	13-1
S13.03 DESIGN AND APPLICABLE STANDARDS	13-1
S13.04 EQUIPMENT RATINGS	13-1
S13.05 DETAILED REQUIREMENTS	13-2
S13.06 DEDICATED PROTECTION	13-5
S13.07 LINE PROTECTION	13-5
SECTION 14 - COMMUNICATION SYSTEM	
S14.01 SCOPE OF WORK	14-1
S14.02 PURPOSE, TECHNICAL SPECIFICATIONS, AND PERFORMANCE DATA REQUIREMENTS	14-1
S14.03 SCADA SYSTEM	14-3
SECTION 15 - GROUNDING SYSTEM	
S15.01 SCOPE OF WORK	15-1
S15.02 GROUNDING WORKS	15-1
SECTION 16 - ELECTRICAL AUXILIARY EQUIPMENT	
S16.01 SCOPE OF WORK	16-1
S16.02 WORK INCLUDED	16-1
S16.03 CODES AND STANDARD	16-1
S16.04 CABLE TRAYS AND SUPPORTS	16-1
S16.05 CONDUIT, BOXES AND FITTINGS	16-2
S16.06 750 V WIRE AND CABLE	16-4
S16.07 CONTROL CABLES	16-4
S16.08 STATION CLOCKS	16-6
S16.09 MOTOR CONTROL CENTER (IF REQUIRED)	16-6
S16.10 SURGE TANK WATER LEVEL TRANSMITTER	16-9
S16.11 TELEPHONE SYSTEM (NOT APPLICABLE)	16-10
S16.12 TESTS	16-11
S16.13 HV CABLE END TREATING MATERIAL	16-11

SECTION 1
GENERAL

SECTION 1 - GENERAL

S1.01 GENERAL

- (1) These General Specifications apply to all equipment, materials, devices & components, including pre-engineering or bought-out items, procedures, methods, techniques, and workmanship contained in the other Technical Specifications whether referred to specifically or not.
- (2) Where the other Technical Specifications conflict with these General Specifications, the Technical Specifications shall prevail.
- (3) All works shall be subject to a quality control program developed by the Contractor which shall be designed to prevent and readily detect and correct non-conformities in quality of the work as specified in this section, or internationally recognized equivalent. The Contractor shall make available to the Engineer details of the quality control program at the Contractor, sub-Contractor, and Manufacturer's plants which are applicable to the Works before manufacturing begins
- (4) The Engineer will be the sole judge of material and workmanship, among all things, furnished and supplied by the Contractor. No patching, plugging, shimming or other such means to overcome defects, discrepancies or errors shall be employed without the written agreement of the Engineer. Failure to comply with this requirement shall constitute grounds for rejection of the item in question.
- (5) Material and equipment not covered by these Specifications shall be subject to acceptance by the Department.

S1.02 SERVICE CONDITIONS

All the equipment shall be designed and manufactured for its particular location for continuous operation at the extremes of climate as listed in Clause 7.02 of Volume 1. Specifically, all equipment to be installed indoors shall be designed and manufactured for satisfactory continuous operation at an ambient temperature of 40°C and all equipment to be installed outside shall be designed and manufactured for satisfactory continuous operation at an ambient temperature of 45°C. Equipment supplied between ceiling and the roofs shall be designed for satisfactory operation at an ambient temperature of 60°C.

S1.03 REGULATIONS AND STANDARDS

The supply must conform to the laws and regulations existing in the Kingdom of Thailand, in addition to the particular prescription given in the present Technical Specifications.

All materials and equipment to be incorporated in the Works and the fabrication of same except as otherwise provided shall conform to the latest edition of the Standards of the Engineering Societies given in the following list:

ANSI	American National Standards Institute
AGMA	American Gear Manufacturers Association
AISI	American Iron and Steel Institute
ASHRAE	American Society of Heating, Refrigeration and Air-Conditioning Engineers
IEEE	Institute of Electrical Electronic Engineers
ASME	American Society of Mechanical Engineer
ASTM	American Society for Testing and Materials
NEMA	National Electrical Manufacturers Association
ICEA	Insulated Cable Engineer's Association
AWS	American Welding Society
IEC	International Electrotechnical Commission
SSPC	Steel Structures Painting Council
NEC	National Electrical Code
AISC	American Institute of Steel Construction
NFPA	National Fire Protection Association
AWWA	American Water Works Association
ISA	Instrument Society of America
ISO	International Organization for Standardization
AFBMA	Anti-Friction Bearing Manufacturers Association
CMAA	Crane Manufacturer's Association of America
DEMA	Diesel Engine Manufacturers Association
TIS	Thai Industrial Standard

The latest edition of each standard shall mean the available edition at the date of signature of the Contract.

Other equivalent standards will be accepted provided that they are proposed with the Bid and accepted before the award of the Contract.

The Contractor shall submit two copies (one to the Department and to the Engineer) of the equivalent accepted standards in English or with English translation, showing the correspondence with the specified Standards.

If the Contractor, after the award of the Contract, proposes other equivalent Standards and Specifications and Standards of equivalent material, the Contractor shall state the exact nature of the change, and shall submit complete Standards and Specifications and information and data on the materials for the approval of the DEDE Engineer.

Such submittals shall be timely and failure to do so, or purchase of any proposed equivalent materials prior to the approval of the DEDE Engineer, will be at the Contractor's risk.

S1.04 UNITS OF MEASUREMENTS

Units of measurements shall be in the metric and Celsius systems, using the following abbreviations.

<u>Quantity</u>	<u>Unit</u>	<u>Symbol</u>	<u>Remarks</u>
Length	metre	m	
Time	second	s	
	hour	h	
	day	d	
	minute	min	
Volume	litre	L	
Temperature	degree Celsius	°C	
Force (weight)	gram	g	
	kilogram	kg	
	tonne	t	kg x 10 ³
Pressure	kilogram per square centimeter	kg / cm ²	
Material Strength	Kilogram per square centimetre	f (y)	minimum yield point
		f (u)	minimum ultimate strength
Power	watt	W	
Frequency	hertz.	Hz	
Electric potential	volt	V	
Electric resistance	ohm	Ω	
Electric Current	ampere	A	

The following is a list of prefixes used in conjunction with the basic units.

<u>Multiplying Factor</u>	<u>Prefix</u>	<u>Symbol</u>
10^9	giga	G
10^6	mega	M
10^3	kilo	k
10^{-2}	centi	c
10^{-3}	milli	m
10^{-6}	micro	μ

S1.05 MAINTENANCE TOOLS AND INSTRUMENTS

- (1) The Contractor shall supply all maintenance tools and instruments required or likely to be required for the proper maintenance of the Plant during its service life. The maintenance tools and instruments shall be sufficient to enable full dismantling and reassemble of the Plant, testing for wear or distortion of all wearing parts, diagnosing and locating faults in electronic equipment and replacement of all spare parts ordered.
- (2) The maintenance tools and instruments shall include but not be confined to:
 - (a) Portable ladders and platforms to permit maintenance service;
 - (b) One (1) set of special tools and appliances to enable all maintenance tasks to be performed;
 - (c) One (1) grease gun (if grease lubrication is required) for each type of grease used in the plant with attachments to suit each size of grease nipple;
 - (d) One (1) complete set of hand tools and appliances sufficient for all maintenance tasks associated with the plant. The set shall include, but not be confined to:
 - (i) Spanners to fit every size of nut and bolt used in the plant, screwdrivers, scrapers, files, hammers, pliers, wrenches, wiring tools, etc., as appropriate;
 - (ii) Gauges, levels and other measuring instruments for checking clearances and dimensions;
 - (iii) Insulation testers 500 V and 1,000 V 1 set (electronic type);
 - (iv) Multi-meter, digital type 1 set
 - (v) Clip-amp for AC current measurement 0-1000A, 50 Hz digital type 1 set
 - (vi) Tachometer, digital type, 0-2,000 rpm, 1 set
 - (vii) Phase rotation tester, 1 set
 - (viii) Vibration measuring device (Digital type), 1 set
 - (ix) Any tools necessary for changing lamps for instruments of control panels;

- (e) One (1) set of AC-DC arc welder, 300A, AC 1Ø, 230V, 50 Hz with power improvement capacitor and cable (50m), holder and earth clamp.
 - (f) One (1) of complete set Oxy-Acetylene Welder.
 - (g) One (1) set of disc grinder 100 mmØ, AC 1Ø, 230 V, 50 Hz.
 - (h) One (1) set of portable electric drill 20 mmØ, AC 1Ø, 230 V, 50 Hz.
 - (i) One (1) set of electric hammer drill 19 mmØ, AC 1Ø, 230 V, 50 Hz.
 - (j) One (1) set of vacuum cleaner, industrial heavy duty type, AC 1Ø, 230 V, 50 Hz., 1.5 kW.
 - (k) One (1) set of air compressor, 7 kgf/cm², 200 liter/min, AC 1Ø, 230 V, 50 Hz. with wheels.
- (3) The individual tools and appliances shall be listed in price schedule. The prices of the tools and appliances shall be included in the Contract Price.
- (4) Any additional maintenance tools and appliances which are required for the proper maintenance of the Plant as defined in this Clause and which are not listed in Price Schedule, shall be included in the Contract Price.
- (5) The Contractor may use the mechanical handling equipment for initial erection of the Plant but shall make good any wear or damage before handing over.
- (6) (a) Maintenance equipment shall be suitably arranged in metal tool boxes of cabinets each fitted with a padlock and 2 keys. Each tool box or cabinet shall be clearly and permanently marked with the name of the plant to which the maintenance tools and instruments apply and with a list of the equipment it contains.
- (b) Large tools shall be mounted on a suitable shadow board arranged for wall mounting.

S1.06 SPARE PARTS

- (1) All spare parts recommended for the Plant by the Contractor shall be listed in Price Schedule with their individual prices. The spare parts offered shall include all parts subject to normal wear and tear and also such major sub-assemblies as may be subject to accidental damage.
- (2) The Department may order all or any of the spare parts at his discretion. The Contractor shall supply the specified and recommended spare parts at the individual prices stated in the price schedule provided that the selection is made by the Department.

- (3) All spare parts ordered shall be interchangeable and suitable for use in place of corresponding parts supplied with the Plant. They shall comply with the Contract and shall be clearly and permanently marked with their descriptions and identification members both on the parts and on the outside of the packages and prepared for permanent storage in an approved manner to prevent deterioration.
- (4) The Contractor shall provide a schedule of spare parts, which shall list for each spare part its identification number, description and quantity with a space for the Department to add his own identification number.

S1.07 ERECTION, OPERATION AND MAINTENANCE INSTRUCTIONS

(1) Scope

- (a) The Contractor shall provide erection, operation and maintenance instructions, the scope of which shall be suitable for fully informing the Department's staff on all aspects of the erection, operation and maintenance of the Plant.

The Contractor shall, in preparing the instruction, take into account the possible lack of experience and lack of familiarity of the operation and maintenance staff with the type of equipment supplied. He shall present the information as simply, clearly and precisely as possible.

The instructions shall be provided in draft and final forms. If the need to modify the final instructions arises, the Contractor shall provide the necessary modified content as soon as possible after the need for modification arises.

- (b) The content of the instructions shall be directly applicable to the plant. Typical instructions will not be accepted.
- (c) The Contractor shall require his site supervisor to comment from time to time on the draft instructions. He shall take account of these comments and comments by the Department and the Engineer when preparing the final instructions for approval.
- (d) All costs in connection with the provision of the instructions shall be deemed to be included in the Contract Price.

(2) Format and compilation - Content of Final Instructions

- (a) The instructions shall be reproduced in ink by letterpress or offset printing or in carbon by electrostatic printing. Reproductions obtained by using dyes, chemicals or photo-sensitive or heat-sensitive materials are not acceptable.
- (b) All text shall be on size A4 paper.

(c) Diagrams and drawings provided as part of the instructions shall be size A3 wherever the original is size A3 or larger and size A4 for all others. Insertion of loose drawings into cover pockets is not acceptable

- (d) Text, drawings, diagrams and illustrations included in the instructions shall be easily readable by a person having normal eyesight.
- (e) Each copy of the final instructions shall be bound into loose-leaf volumes in strong, durable, washable, vinyl plastic covers inscribed with bold letters upon the front and spine. A sample of the proposed inscribed covers and binding shall be submitted to the Engineer with the draft instructions for approval.

(3) Program for Delivery of Instructions

- (a) The Contractor shall deliver the complete draft and the complete final instructions within the periods nominated in Clause 6.06 of Volume 1.
- (b) Failure to deliver the required number of copies of approved final instructions shall be sufficient reason for the Engineer to withhold the issuing of a Provisional Acceptance Certificate in accordance with the Conditions of Contract.

(4) Detailed Instruction Content

(a) General

- (i) Each volume shall have a table of contents for the volume and a list of the other volumes at the front.
- (ii) The instructions content for each plant feature, as defined in sub-clause (1) of this Clause and Table S1.06, shall include, but not necessarily be limited to, all the material required by this sub-clause.

(b) Section 1 - Contents Section

The feature name and list of sections as in sub-clause (1) (d) of this Clause.

(c) Section 2 - Introduction

- (i) Subsection 2.1 - History
Brief description of the basic purpose of the plant feature. Also a brief definition of type of plant with main performance characteristics such as rating, head, speed, voltage.
- (ii) Subsection 2.2 - Purpose and Nature
Brief statement of the organizations involved in the design, manufacture and erection of the Plant, and date when Plant entered commercial service.

(d) Section 3 - Description

A comprehensive description defining the generic type of plant and component, method of construction, materials of main components, design features, control and protection functions. Relationship with other plant and including the description of auxiliaries specific to the plant feature.

(e) Section 4 - Operation

- (i) Subsection 4.1 - Operating Sequences
Brief description of the operational functions of which the plant feature is capable and a reference to the instructions volumes covering operation in detail.
- (ii) Subsection 4.2 - Operating Limits
Tabulated data on limits for all operating parameters and reason for limit.
- (iii) Subsection 4.3 - Pre-start check List
Comprehensive tabulated list or sequence diagram of all conditions which must be checked before the Plant may be started after being out of service for overhaul or any reason. (This is not intended to cover checks required before each routine start up, i.e., when the plant has been stopped and is nominally ready to re-start on demand).
- (iv) Subsection 4.4 - In-service Check List
Comprehensive tabulated list of all observations to be made during periodic inspections and tests, defining the location, range of acceptable values and action to be taken if incorrect values are found.

(f) Section 5 - Maintenance

- (i) Periodic service and maintenance procedures including maintenance schedules defining:
 - component and condition to be checked
 - required frequency of checking
 - equipment and stock required
 - required plant condition for service or maintenance including instructions for isolating the whole or any section of the plant so that maintenance or repairs can be done in complete safety
 - dismantling sequence and methods
 - inspection of components, detailed checks for condition and criteria for acceptance, rejection or reconditioning
 - reconditioning, replacement and adjustment procedures
 - re-assembly sequence and methods.
- (ii) Fault diagnosis based on symptoms of malfunctions and wear.
- (iii) Recommissioning procedures after major overhaul.
- (iv) Lubrication requirements incorporating lubricants recommended in Clause S1.21 including a comprehensive lubrication chart, instructions on filter maintenance, and instructions on testing and maintenance of lubricating oil.
- (v) Testing and maintenance requirements for electrical insulating oils.
- (vi) Ordering data shall be provided in sufficient detail to allow any part of sub-assembly to be re-ordered and/or a satisfactory substitute to be made on site. Nameplate information including model and serial number is required for each item of equipment supplied.

(g) Section 6 - Drawings

- (i) Index of drawings contained in Section 6 of the Instructions.

(ii) One copy of drawing referred to in the text or necessary for clear understanding and use of the text, including all assembly, layout and arrangement drawings.

(h) Section 7 - Brochure for Proprietary Equipment

Manufacturer's brochures, instruction pamphlets and the like, containing the operation and maintenance information as specified in paragraphs (e) and (f) of this sub-clause in respect of proprietary equipment.

TABLE S1.07

VOL NO. & TITLE	PLANT FEATURE REF. NO.	PLANT FEATURE
1. Plant Design Data and Test Results		All performance data and charts over the full range of operation shall be provided for each plant feature. Table shall list all design clearances, settings, adjustments, voltages, currents, pressures, levels and flows together with the actual values measured or observed during manufacture, delivery, erection or testing as appropriate. All tests carried out at works and at site shall be described and the complete test records and results shall be included.
2. Plant Photo- graphs		This volume shall include the photographs and descriptions required by Clause S1.09 for each plant feature.
3. Erection Instructions		Erection instructions for each plant feature.
4. Turbine Governor Inlet Valve and Ancillaries	4.1 Turbine 4.2 Governor 4.3 Turbine Inlet Valve 4.4 Turbine Control and Protection 4.5 Auxiliary Equipment	
5. Mechanical Auxiliary Equipment	5.1 Unit Cooling Water System 5.2 Compressed Air System 5.3 Ventilation and Air-Conditioning Systems 5.4 Water Drainage System 5.5 Powerhouse Crane 5.6 Diesel-driven Standby Electric Power System	
6. Generator and Auxiliaries	6.1 Generator 6.2 Shaft and Bearing 6.3 Signal Generator 6.4 Excitation System	

7. AC Station Service Transformer and Switchboard	7.1 Dry type metal-enclosed indoor, station service transformer Service Transformer 7.2 High Voltage Fused Load Interrupter Switches
8. Generator Terminal Cubicles, Bus Ducts and Neutral Cubicles	8.1 Generator circuit breaker cubicles 8.2 Generator CT, PT cubicle 8.3 Generator excitation transformer cubicle (if applicable) 8.4 Generator neutral cubicles 8.5 Station service transformer cubicle 8.6 Station service disconnecting switch cubicle
9. DC Station Service	9.1 125 V Battery with Racks and Fuses 9.2 Instrument and Circuit Breaker Panel 9.3 Battery Charger 9.4 DC Distribution Panel Board
10. Control, Protection and Alarm System	10.1 Main Control Board 10.2 Auxiliary Relay Board
11. Main Transformer	See detail in section 12
12. Line Protection Equipment 24 kV Switchgear and Switchyard	12.1 24 kV Switchgear Recloser 12.2 Switchyard
13. Electrical Auxiliary Equipment	13.1 Cable Trays and Supports 13.2 Conduit, Boxes and Fittings 13.3 HV Cable 13.4 750 V Wire and Cable 13.5 Control Cable 13.6 Station Clocks 13.7 Motor Control Center 13.8 Communication system. 13.9 HV Cable End Treating Material

S1.08 DRAWING

(1) General

All drawings produced by the Contractor or his sub-contractor for this Contract shall comply with the requirements of this Clause.

(2) Drawing Sizes and Standards

All drawings shall be drawn on the International Standards Organization (ISO) 'A' series of drawing sheets standardising where possible on the A3 size. Information and details shall be written in English.

(3) Title Blocks

The Contractor or his subcontractors' title block shall show his name, the date, the title and number of the drawing and each new issue of the drawing shall be identified by a revision letter as part of the drawing number. A detailed description of the revision shall appear on the drawing. In addition each drawing shall show the following details in the lower right hand corner.

(4) Key-drawing List

The Contractor shall maintain a list of all drawings prepared for the Project and this list shall show, for each drawing which has been sent to the Engineer. The Contractor shall provide three copies of this list to the Engineer at three-monthly intervals.

(5) Quality

(a) Drawings for approval by the Engineer shall be supplied as prints in quadruplicate and shall be of suitable quality to permit reproduction. As-built drawings presented by the Contractor in accordance with Clause 4.06 of Volume 1 shall be the Contractor's original drawings in non-fading ink on durable plastic base film without any folds. Transparencies reproduced from the original will not be accepted as as-built drawings.

(b) As-built drawings shall be of quality suitable for the reproduction of clear legible full size prints and transparencies.

(6) Drawings on Site

Copies of the latest revisions of all drawings shall be sent to the Contractor site office as soon as possible after they are approved. The drawing shall be available at all reasonable times for inspection by the Engineer.

(7) Position Reference

Drawings indicating the position of any item of equipment shall use the system of grid lines and levels established by the Engineer as the reference datum.

S1.09 PACKING

(1) All Plant shall be effectively protected against damage and corrosion during transportation from the place of manufacture to the site and during storage.

- (2) Immediately upon arrival at Site, the Contractor shall arrange for all packages to be checked against the shipping list for loss and inspected for damage during transit.
- (3) The Department will not provide covered storage at the Site. The Contractor shall ensure that all packages are suitable for the storage conditions provided.
- (4) If machined surfaces show sign of damage on receipt of shipment, the corrosion protection shall be removed, the rust and moisture eliminated, the defects repaired by approved means and the protection re-applied.
- (5) Electrical insulation shall be protected against sweating and entry of dust during transportation and storage.
- (6) Flange faces and openings shall be covered by metal blanks and gaskets. Rubber parts shall be protected against light and air. An approved drying agent shall be included with all items enclosed in plastic or other impervious material.
- (7) All packing material, except that required for storage of spare parts, shall remain the property of the Contractor and shall be removed from the Site. Only parts for immediate use shall be delivered from the works storage area and their packing material shall be removed quickly from the installation site and disposed of to the satisfaction of the Engineer.
- (8) All packages shall be clearly and indelibly marked with the dimensions, weight, slinging and load bearing points. Any packages which are not symmetrically loaded shall be marked with the position of the center of gravity.
- (9) Each package shall contain a packing list in a waterproof envelope. Two copies of the packing list shall be sent to the Engineer prior to dispatch.
- (10) The Engineer shall reserve the right to inspect and approved the equipment and the packing before the items are dispatched. Such inspection will not relieve the Contractor from responsibility for any loss or damage occurring during transportation and storage.

S1.10 PHOTOGRAPHS

- (1) The Contractor shall keep photographic records of the work during manufacture, factory assembly, delivery, erection, commissioning and rectification and as required by the Engineer.
- (2) The Contractor shall supply photographs which will:
 - (a) assist in training people, who may have no experience, in the operation, routine maintenance, major maintenance and testing of the plant; and
 - (b) record information which it may not be possible to obtain at a later date; and

- (c) record details of how work, which is not frequently required, is done.

This will supplement the detailed instructions provided in the operation and maintenance instructions and reduce the need to rely on memory.

- (3) A volume of photographs shall be included with the operation and maintenance instructions. They shall be adequately edited and provided with captions and descriptions to the satisfaction of the Engineer.
- (4) All costs in this connection shall be included in the Contract Price.

S1.11 LABELS

(1) Labels

- (a) The Contractor shall provide labels in sufficient numbers, size and detail to permit rapid and positive identification to be made of all pieces of equipment whether enclosed in cubicles or separately mounted.
- (b) Labels used indoors shall be engraved on double sided, engraving grade plastic laminate with black letters not less than 3.0 mm. high on a white background. Labels (used outdoors) shall be of matt stainless steel, with the letters filled with a suitable wax (Gravograph or equal). Pipe labels shall use adhesive markers. Labels over 100 mm. long and all labels fixed outdoors shall be fastened by nickel-plated brass screws. Indoor plastic laminate labels of length less than 100 mm. shall be fastened by means of an approved contact adhesive. Labels for cubicles and equipment mounted within 2.0 m above floor level shall be positioned so that they can be read by a person of average height standing in front of the cubicles.
- (c) Labels for devices mounted on or in enclosures shall be provided on the inside of the enclosure adjacent to the device as well as on the device. Device labels shall not be located on removable covers of the device.
- (d) Warning labels shall be provided on or in all electrical equipment where terminals at voltages of 220 V and above may be exposed during maintenance, indoor warning labels shall be of plastic laminate with white lettering on a red background. Outdoor warning labels shall be of vitreous enameled steel with white lettering on a red background.
- (e) The text of each device label shall include the device number and a clear description of the function. Fuses, miniature circuit-breakers and links shall be identified by their function, voltage, polarity, phase color and fuse link (or circuit-breaker) rating. The wording for labels shall be in the English language.

(2) Rating Plates

A rating plate complying with the requirements of the appropriate standard shall be provided on each item of plant. Where the rating plate is affixed to an item of plant of a mass in excess of 1 ton, it shall also specify the mass of the item.

(3) General

Failure to complete the supply and fixing of labels and rating plates shall be sufficient reason for the Engineer to withhold the issuing of a Provisional Acceptance Certificate in accordance with the Conditions of Contract.

S1.12 PAINTING

Synthetic resin paint shall be used for the finish paint of all exposed portions of all the Equipment, except for the portion embedded in concrete, machined mating surfaces and galvanized surfaces.

The primary coat shall be of the kind matching the finish paint mentioned and shall be of rust preventive nature.

The exposed portions of all Equipment except those embedded in concrete shall receive shop finishes as detailed in this section.

Paints shall be applied only to surfaces which are free of moisture as determined by sight and touch. The ambient temperature shall be at least 5°C above the minimum temperature recommended by paint supplier for application on any coat.

The paint shall be applied using brush or spray techniques. When painting on any surface has commenced, the painting operation shall be completed as soon as practicable, without delays. The drying time between coats shall not be less than 12 hours.

The Contractor shall supply touchup paint to match all shop-painted items. This quantity shall be at least 15 percent of the paint used to the original shop painting, except for the control cubicles for which at least 30 percent of the original quantity of paint shall be supplied.

The color schedule for the Equipment will be decided by Munsell color notation and included in the Award of the Contract.

The painting system referred to in these Specifications shall be as follows:-

PAINT SYSTEM 1

Surfaces in Contact with Water

(a) General

All surfaces shall be painted with an inorganic, epoxy zinc-rich primer and three coats of coal tar epoxy. Final shop painting shall not be applied within 100 mm of field welding. These areas will only receive one coat of inorganic, epoxy zinc-rich primer that can be removed prior to welding.

(b) Surface Preparation

Surfaces shall be blast-cleaned in accordance with SSPC-SP10.

(c) Paint Application

(i) Materials

The painting system shall consist of one coat of inorganic, epoxy zinc-rich primer and three coats of a compatible coal tar system.

All components shall be from the same supplier and the supplier's instructions shall be rigidly adhered to.

(ii) Film Thickness

The dry film thickness of the primer shall be between 0.05 mm and 0.09 mm. The dry film thickness of each of the coal tar epoxy coats shall be between 0.15 mm. and 0.20 mm.

(d) Final Film Thickness

The final thickness of the three coats shall be at least 0.45 mm. This shall be checked by a Type B film thickness gauge, supplied by the Contractor, calibrated on metal identical in composition, thickness and surface preparation and finish to that being painted. A sufficient number of measurements shall be made to establish the final thickness.

The entire painted surface shall be subject to electrical inspection by a holiday detector, furnished by the Contractor.

PAINT SYSTEM 2

Surfaces in Contact with oil

(a) Surface Preparation

Surface shall be blast-cleaned in accordance with SSPC-SP10.

(b) Paint Application

(i) Materials

The painting system shall consist of two coats of a high built epoxy paint suitable for this purpose.

(c) Final Film Thickness

A sufficient number of readings with a gauge supplied by the Contractor shall be taken to ensure a minimum dry film thickness of 0.30 mm. is attained.

PAINT SYSTEM 3

Electrical Panels and Boards

(a) Surface Preparation

Surfaces to be painted shall be blast-cleaned in accordance with SSPC-SP6.

(b) Paint Application

(i) Materials

The painting system shall comprise two coats of inorganic, zinc-chromate primer and two coats of epoxy enamel.

(ii) Film Thickness

The dry film thickness of the primer shall be not less than 0.80 mm. and the dry film thickness of the epoxy enamel shall be not less than 0.10 mm.

(c) Final Film Thickness

A sufficient number of readings with a gauge supplied by the Contractor shall be taken to ensure that a minimum final film thickness of 0.25 mm. is attained.

PAINT SYSTEM 4 (FOR INDOOR STEEL WORK)

Mechanical Equipment, Prefabricated Piping

(a) Surface Preparation

Surfaces to be painted shall be blast-cleaned in accordance with SSPC-SP10.

(b) Paint Application

(i) Materials

The painting system shall comprise one coat of inorganic epoxy zinc-rich primer and two finish coats of acrylic latex, glossy finish paint.

(c) Final Film Thickness

A sufficient number of readings with a gauge supplied by the Contractor shall be taken to ensure a minimum film total thickness of 0.30 mm. is attained.

METAL COATINGS

- (a) Galvanizing shall be applied by the hot-dip process to ASTM A120, ASTM A123 and ASTM A153. Materials (such as welding slag, paint and grease) likely to resist attack by the pickling liquid shall be removed prior to pickling. The surface after galvanizing shall carry an unbroken covering of zinc uniform in appearance and in thickness. The thickness shall be 0.09 mm. (0.6 kg/m².)
- (b) Electroplating shall be either nickel plus chromium plating, cadmium plating or zinc plating shall comply with the following:
 - (i) Nickel plus chromium plating shall be in accordance with ASTM B456. Nickel plating alone shall not be used.
 - (ii) Electroplating of zinc shall be in accordance with ASTM B633 and ASTM A164.

S1.13 LOCKING FACILITIES

- (1) Where locking facilities are required to prevent unauthorized access to or operation of equipment, the facility shall be suitable for application of a padlock with 10 mm. shackle diameter and 35 mm. shackle opening.
- (2) Integral locking facilities, e.g., of the key-in handle type will not be accepted and if normally fitted in proprietary equipment shall be removed or otherwise rendered inoperative.

S1.14 TROPICALIZATION

- (1) General : All materials and equipment supplied under these Specifications shall be suitable for being delivered, stored and operated under tropical conditions of high temperature, high humidity, heavy rainfall, mildew and fungus conducive environment.

Process for tropicalization shall be in accordance with the best commercial and industrial practices.

- (2) Metals : Iron and steel shall generally be painted or galvanized or metal-sprayed as appropriate. Indoor parts may alternatively have chromium or copper-nickel platings, or other suitable protective finish. When it is necessary to use dissimilar metals in contacts, these shall be so selected that the potential difference between them in the electrochemical series is not such as to cause galvanic corrosion. If this is not possible, the contact surface of one both of the metals shall be electroplated or otherwise finished in such a manner that the potential difference is reduced within the required limits or, alternatively, the two metals shall be insulated from each other by a suitable insulating material or a coating of varnish compound.

- (3) Bolts, Screws, Nuts, Washers : Steel bolts, screws, nuts and washers when used, shall be zinc, cadmium or chromium plated or, where plating is not possible due to tolerance limitations, of corrosion-resisting steel. All wood screws shall be dull nickel-plated brass or of other suitable finish. Corrosion-resisting steel, copper-nickel alloy or bronze, shall also be used for bolts and nuts when either or both are subject to frequent adjustment or removal, or are in contact with water and for bolts projecting from concrete with nuts to removal or vice versa.
- (4) Fabrics, Cork, Paper, etc. : Fabrics, cork paper and similar materials, which are not subsequently protected by impregnation, shall be adequately treated with suitable fungicide. Sleeve and fabrics treated with linseed oil varnishes shall not be used.
- (5) Adhesives : Adhesives shall be especially selected to ensure the use of types which are impervious to moisture, resistant to mold growth and not subject to the ravages of insects. Synthetic resin cement only shall be used for joining wood. Case in cement shall not be used.
- (6) Electrical Material and Equipment : Materials and components which are inherently fungus resistant or are protected by hermetic sealing or oil immersion need not be treated. Other elements shall be protected by additional varnish for high humidity and given an antifungal treatment.

S1.15 MISCELLANEOUS METALWORK

The Contractor shall provide and install in respect of the Plant in his supply, the following miscellaneous metalworks;

- (a) Soleplates, bedplates, foundation bolts and anchor bolt;
- (b) Floor plates and kerbing, including covers for pipe and cable trenches, required for completing the floors around and over the Plant;
- (c) Platforms, stairways, ladders, guards, handrails necessary for easy and safe access to the Plant requiring access for operation, maintenance and testing;
- (d) Safety guards at each point where normal access would permit personnel to come within reach of any moving item of plant; and
- (e) Lifting lugs, eyebolts or other lifting attachment points on each item having a mass of more than 40 kg.

S1.16 EMBEDMENT, FOUNDATIONS AND PLINTHS

- (1) (a) Except where otherwise stated, embedded supports and other embedded metalwork shall be provided by the Contractor. They shall be consistent with dimensioned concrete outline and structural metalwork drawings. The Contractor shall ensure that adequate provision has been made in the civil drawings for the complete installation of his Plant and shall inform the contractor for the civil works of:
 - (i) Any required changes and the reasons;
 - (ii) Location and outlines of all metalwork to be embedded in the concrete.
 - (b) Any equipment to be embedded shall be supplied to the civil works contractor not less than 3 months before construction work is programmed to commence in the area concerned.
 - (c) Unless the Contractor informs the civil works contractor of his requirements not less than 3 months before work is programmed to commence in the area concerned, such additions or alternations to the civil works shall be made by the Contractor or, if the Engineer so requires, by the Department at the expense of the Contractor.
 - (d) The Contractor shall be responsible for ensuring that any items which he requires to have embedded and any agreed alterations to the civil works, are carried out on site.
- (2) All scrubbling to a depth of 15 mm grouting in of plant, grillages and steelwork, adjustment to foundation levels, grinding of foundations, bedding on foundations and cementing into walls and floors, shall be carried out by the Contractor.
 - (3) Equipment for mounting on floors shall be installed on concrete plinths to be constructed by the Contractor with the finished level up to 75 mm above the floor level to cater for normal variations which will occur in foundations. With respect to his Plant, the Contractor shall supply all foundation bolts and packing plates between the concrete and the plant, equipment and bases.
 - (4) Plant which is mounted on the floor and which does not require supporting steelwork grouted or embedded in the concrete foundation and plant which is surface mounted on concrete walls or the lower face of concrete shall be fixed in position by approved masonry anchors. Masonry anchors shall be expansion type or resin adhesive type, shall be of adequate strength and corrosion-proof. The Contractor shall provide the fastenings and shall forward to the Engineer full details of the proposed masonry anchors including typical pull-out values and if requested shall submit samples for approval. Wooden, fiber or plastic plugs or similar type fixings will not be accepted.
 - (5) Embedded parts installed by the Contractor shall be accurately placed and secured by the Contractor. The placing of the concrete around such items will be by others.

S1.17 POSITION OF INSTRUMENTS, CONTROLS AND HANDWHEELS

- (1) Instruments shall be located conveniently for access and reading. Instruments which must be read frequently shall be located between 750 mm and 1,800 mm from the floor. Those which are read occasionally may be located between 500 mm and 2,000 mm from the floor.
- (2) Controls and valve hand wheels shall be located conveniently for access and operation. In general controls should be within the range 750 mm to 1,500 mm and valve hand wheels 1000 mm to 500 mm above floor level.

S1.18 FABRICATION AND WELDING

- (1) General Requirements for Fabrication

The following requirements shall apply to all fabrication of components.

- (a) Plates and sections shall be free of all surface marks or damage exceeding 1 mm deep.
- (b) Weld root gaps for partial penetration welds shall not exceed 1.5 mm the dimensions of weld preparations, root gaps and plate alignment shall be to tolerances specified on the relevant drawings. All weld preparations shall be subject to examination for material flaws.
- (c) Before welding, the weld preparation and plate surface for 15 mm on either side of the preparation shall be completely cleaned to base metal including complete removal of any surface coating by abrasive blasting.
- (d) Weld procedure and welder qualification tests shall be carried out in accordance with the approved standards. Where the standard does not specifically require weld procedure and/or welder qualification test, the Engineer may require the Contractor to submit details of the proposed weld procedure and of the qualifications of the proposed operator. The Engineer may at his discretion require that weld procedure and/or welder qualification tests be conducted in such cases. The Engineer reserves the right to call for further qualification tests and to withdrawn approval of any welder whose work is unseat is factory.
- (e) Weld procedure and welder qualification tests shall reproduce the production conditions including preheat, electrode treatment, interpass temperature, degree of restraint and stress relief.
- (f) Undercut not exceeding 1 mm. deep shall be removed by grinding; undercut exceeding 1 mm. deep shall be filled by welding.
- (g) The surface of welds shall be smooth and free of sharp contour changes. The Contractor shall grind the surface of any weld as necessary in the opinion of the Engineer to avoid affecting the interpretation of non-destructive examination.

- (h) Arc strikes on the plate surface shall be avoided. Accidental arc strikes shall be ground out and the area crack-detected.
- (i) Welded-on fabrication aids shall be kept to a minimum and shall be subject to the approval of the Engineer. They shall be attached only by approved welders using approved procedures and shall be removed by flame cutting not less than 1.5 mm above the parent plate surface and then by subsequent grinding and crack-detecting of the weld area.
- (i) Butt welds shall be free from under filling and from reinforcement greater than one-tenth the face width of the weld. All undercut shall be filled by welding.
- (j) Wherever practicable, welding shall be carried out in the down hand position.
- (k) Weld spatter shall be completely removed. Machined surfaces and tapped holes shall be adequately protected from spatter during welding.
- (l) Joints not completely protected from the weather or in a corrosive environment shall be seal welded. Unless otherwise approved, welds between dissimilar metals shall be performed at the Contractor's premises.
- (m) Electrodes shall be stored and dried before use strictly in accordance with the electrode manufacturer's recommendation and welding code requirements.
- (n) Preheat and interpass temperatures shall be applied in accordance with the electrode and steel manufacturer's recommendation and with the weld procedure tests. Measurements shall be by temper sticks or surface pyrometer on the opposite side of the plate surface pyrometer on the opposite side of the plate surface from that to which heating is being applied.

(2) Further Requirements for Important Stressed Components

The important stressed components shall mean those components whose failure would endanger the operation of plant or the safety of personnel. They shall include but shall not necessarily be confined to:

- (a) Components or parts thereof including welds which are stressed to greater than 40 percent of yield stress in normal or abnormal service conditions;
- (b) Components which are stressed directly or indirectly by pressure conduit or tailwater pressure, operating oil pressure or air pressure;
- (c) All rotating parts of main plant (generator and turbine but excluding auxiliaries);
- (d) Bearings and their support systems; and
- (e) Lifting equipment, crane girders and crabs.

The following further requirements shall apply to the important stressed components in addition to the requirements in sub-clause (1) of this Clause.

- (i) All plate materials and sections shall be identified by heat number at all phases of fabrication and erection. They shall be checked ultrasonically for internal defects.

- (ii) As far as practicable, all shop-welded fabrication shall be stress relieved.
- (iii) As far as practicable, all welds shall be full penetration, back-gouged and of a configuration which lends itself to radiographic or ultrasonic examination.

(3) Non-destructive Testing of Welds in Steel Components

- (a) All full penetration welds in important stressed components shall be examined for their full length radiographically or ultrasonically. In general this examination shall be by radiography for butt welds and by ultrasonic for tee-welds. The examination methods and the standard of acceptability shall be in accordance with Section V of the ASME Code.
- (b) In addition a percentage of all other welds shall be examined ultrasonically or radiographically. The examination methods, extent of examination and standard of acceptability shall be in accordance with Section V of the ASME Code or AWS Code.
- (c) The toes of all fillet welds in important stressed components shall be subject to crack-detection.
- (d) Radiography of welds shall be carried out in accordance with Section V of the ASME Code.
- (e) The Contractor shall submit radiographs and reports to the Engineer within 7 calendar days of the taking of radiographs. The report shall contain complete identification of the component concerned, definition of the location of the radiographed areas, full description of the radiographic techniques and report on all indications of the film.
- (f) Ultrasonic techniques and acceptability of defects found by ultrasonic examination shall be in accordance with ASTM A435.
- (g) Welds in which unacceptable defects are found by radiography or ultrasonic examination shall be subject to re-examination by the same respective method after repair.

(4) Non-destructive Testing of Welds in Aluminum Components

Such welds shall be tested generally in accordance with Section V of the ASME Code. The actual scope of tests shall be to the approval of the Engineer, dependent on the design and function of the components concerned.

S1.19 PIPING, VALVES AND THREADED FASTENERS

- (1) General : All piping, valves and threaded fasteners shall be designed according to ANSI Standards; the pipes shall be in accordance with ANSI B 31.1; all flanges shall be of raised face (RF) designed according to ANSI B 16.5.

Screwed joints may be used for pipes up to 50 mm. diameter at working pressures not exceeding 7 kg/cm^2 . Pipes of 25 mm. diameter and less for working pressures exceeding 7 kg/cm^2 shall be joined by unions of approved type.

The working pressure of a system shall be taken as the maximum pressure it can attain including water hammer and/or relief valve blow-off pressure.

The pipe diameters shall be calculated considering the following maximum allowable speeds:

- Air 15 m/s and 5 m/s in between compressors and receivers;
- Oil and water at the suction side m/s;
- Oil and water at the pressure side 2.5 m/s.

The thicknesses of the pipes shall be calculated following the ANSI requirements; at least 3 (three) millimeters for corrosion shall be considered for the water and air piping and 1 (one) millimeter for the oil piping.

All piping 100 mm nominal diameter and larger shall be completely prefabricated at Contractor's workshop with all fittings in place except that extra length for field cutting and welding shall be provided where required for field assembly.

Piping with flanged connections shall be furnished with gaskets, bolts, studs and nuts. All pipes up to 50 mm nominal diameter shall be assembled by means of threaded or socket welded fittings. Threaded and socket welded pipe will be Site fabricated, as erection proceeds.

Piping systems shall be complete with fittings, valves, supports and all necessary accessories. Piping arrangement shall be neat in appearance and shall allow a convenient operation. Items requiring periodic attention shall be easily and readily accessible from floors or platforms. Pipes shall neither obstruct passways nor interfere with access to valves and equipment.

The piping buried in the concrete shall be sloped for drainage and provided with 25 mm diameter drain valves at all low points in the system.

The supports, hangers, anchors and clamps necessary to support and restrain all pipes and valves shall be designed, selected and located in order to ensure uniform continuous slopes for draining and minimize stresses in the piping material, and to let the piping system be safely supported, guided and anchored especially for the pipes to be laid in the pier trench.

All items to be site welded to the piping shall be of the same material as that of the relevant piping.

As far as practicable, the supports shall be grouped and of consistent design throughout.

The Contractor shall submit for approval drawings showing;

- The piping flow diagram;
- The piping P and I diagram;
- The piping layouts.

The Contractor's calculations of the piping diameters and thickness shall be available for approval at the Engineer's request.

Asymmetric sketches shall be supplied for site erection.

- (2) Pipes : Pipes shall be in accordance with the ASTM A 53 Grade B standard specification or approved equivalent for welded and seamless steel pipe. Type S, seamless pipes will be preferred. Longitudinal welded pipes type E, electric resistance welded pipes are subject to approval.

All pipes shall be shipped with the ends plugged by plastic covers.

The beveled ends to be welded at site shall be protected by a special paint compatible with the welding.

Elbows having radius at least 1.5 nominal diameter shall be used for changes in the direction of piping having 75 mm nominal diameter and over. For piping having 50 mm. nominal diameter and below commercial fittings shall be used. Bends having radius not less than 5 nominal diameter instead of ells may be used.

Minimum wall thickness at any point of the elbows, bends and ells shall not be less than the minimum wall thickness allowed for pipes.

Shop prefabricated pieces may be employed for tee reducers, drain and other special pieces. Materials and thickness shall be the same as for the straight pipe. Branch connections shall be reinforced where necessary in accordance with the requirements of ANSI B 31.1 "Code for Pressure Piping"

For piping having 50 mm. nominal diameter and over, seamless type fittings such as tee, reducers and cap shall be used for intersection of piping, piping branches, changes in size and end closure. Metered fittings and metered bends will not be accepted.

- (3) Valves : All the valves shall be of the flanged type, made of carbon steel with stem and sealing rings of stainless steel; all valves shall be provided with back seated items.

Valves nominal diameter shall always be equal to the relevant pipe diameter.

Seals and seats shall be positively fixed so that they cannot become loose in service. The fixing of seals and seats by an interference fit only is not acceptable.

The operating mechanism shall have means of lubrication and position indicators and, in the case of isolating valves, the means of padlocking in the open and closed positions together with approved padlocks and keys.

All hand-operated valves shall close by clockwise rotation of the hand wheels which shall be marked to show the direction of closing. Valve hand wheels shall be located for safe and convenient operation with extended spindles where necessary to achieve this. All hand operated valves shall be capable of being opened and closed against their maximum working pressure fully unbalanced with a force at the hand wheel not exceeding 100 N. If necessary to achieve this, reduction gearing, ball or roller bearings shall be provided.

As far as practicable, all valves for similar service shall be of the same make and type and be interchangeable.

All gate valves for water and air service shall be of a type in which the operating mechanism is not subject to the working fluid.

Valves other than needle type shall not be used permanently if the need for throttling is foreseen, such as to adjust flow subdivision in a system, orifice plates or needle valves with fixed stops shall be provided.

Valves for water and oil service may be gate, butterfly, ball, plug or needle type, whichever is most suitable to the particular service and operating pressure.

Valves for air service may be ball, plug or needle type whichever is most suited to the particular service.

Non-return valves shall be of a type specifically designed to avoid impact and water hammer on closure. The closing member shall be pivoted from the valve body, not from a lid cover.

Relief valves for pumps shall be of direct spring loaded, angle body type.

For identification each valve of 150 mm. N.D. and over shall be provided with stainless steel identification disc on the hand wheel.

On this disc the following shall be etched:

- manufacturer;
- catalogue number;
- size inches;
- rating and fluid;
- trim material;
- body and bonnet material.

Valves below 150 mm. N.D. shall be identified with size and ANSI class. The disc shall be written in English.

- (4) Threaded Fasteners : The threaded fasteners shall comply with ISO metric system and with the following requirements:
- steel bolts shall be forged unless otherwise approved;
 - mild steel fasteners shall be zinc or cadmium plated;
 - all parts shall be spot-faced or machined for nuts or bolts except in the case of clearance bolts in structural steelwork;
 - tapped holes shall not be used in sheet metal less than 6 mm. thick;
 - fasteners of less than 6 mm. diameter shall not be used except in instruments and relays;
 - threaded fasteners of more than 8 mm. diameter shall have hexagon or socket hexagon heads;
 - all threaded fasteners subject to vibrations and/or installed in a position which is unable to be inspected during operation shall be locked in an approved manner.

S1.20 CASTING AND PATTERNS

- (1) All steel castings shall be annealed in accordance with the relevant standard. All iron castings shall be mild annealed in a suitable annealing furnace to relieve casting strain before being machined.
- (2) The Contractor shall retain all patterns required for the production of the Plant at least until the end of the maintenance period.

S1.21 LUBRICATION

- (1) The Contractor shall submit, for the approval of the Engineer, a complete list of the lubricants recommended for each part of the Plant; this list shall give the type and grade of each lubricant in sufficient detail to permit the correct lubricant to be supplied from normal commercial domestic sources. As far as possible the number of different types of lubricant required for the plant shall be reduced to a minimum.
- (2) All lubricants and flushing oils required for the plant up to the time of taking over shall be provided by the Contractor.
- (3) The Contractor shall nominate a minimum number of standard size grease nipples which shall be used for all Plant.
- (4) The filling points for lubricating oil systems shall be provided with fine gauze filters beneath the filling caps to prevent the entry of dust.

- (5) Drip trays shall be provided beneath oil filling and drain points and any other locations subject to oil leakage or spillage.
- (6) The filling and drainage points shall be located so that they are conveniently accessible. Adequate working space shall be provided for the positioning of buckets, hoses and other appliances used for filling and drainage.

S1.22 SELF-LUBRICATING BUSHES

- (1) Where self-lubricating bushes are specified, they shall be as follows:
 - (a) For applications subject to immersion or to weather, - bronze with lubricating insert ('Lubrite' by Merriman, Hingham USA or equivalent). The lubricant shall have long-term resistance to deterioration when exposed to atmosphere and water in a tropical climate.
 - (b) For indoor, nominally dry application - as in paragraph (a) of this sub-clause or epoxy resin with glass mesh reinforcement and hard chromium plated and ground journals.
- (2) The use of 'Teflon' or similar materials and the use of materials which promote electrochemical action, is not acceptable.

S1.23 TEST, GENERAL REQUIREMENTS

- (1) Test During Manufacture-General:
 - (a) All Plant materials and components shall be subject to type, sample and routine tests and inspection while in the process of and upon completion of manufacture at the Contractor's premises in accordance with this Specification and the Conditions of Contract. Tests listed in the Standards as optional tests (to be performed if specified at the time of ordering) are required to be performed unless otherwise stated.
 - (b) The Department, its representative and/or the Engineer will visit the factory of the Contractor during manufacturing and factory tests. The attendance to the Contractor's factory for any purpose by The Department, its representative and/or the Engineer shall not in any way release the Contractor of any of his obligations under the Contract until the final acceptance certificate is issued. Some factory tests, if so permitted by prior approval of the Engineer, may be performed without the presence of The Department, its representative and/or the Engineer.
 - (c) The Contractor shall bear the cost for receiving the following persons from the Department for a period of seven (7) days each, which shall include round-trip economy class air fare from Bangkok to the factory, local

transportation cost, lodging and meals and other miscellaneous expenses necessary for the purpose of the trip. The costs for receiving the Department's persons at the Contractor's factory shall be included in the prices bid in the Schedules.

- | | |
|--------------------------------|------------------|
| (i) for turbines | four (4) persons |
| (ii) for generators | four (4) persons |
| (iii) for associated equipment | two (2) persons |
- (d) It is the intention of the Department. To acquire the services of a qualified inspection company to conduct expediting services, inspection company to conduct expediting services, inspection during manufacture and attendance at factory tests. The Contractor is required to provide all reasonable facilities including advance notice (at least thirty (30) days) of all testing dates in order that the said inspection company may fulfill all of its duties as required under the contract to be made between the Department and the inspection company. The attendance of the inspection company at the Contractor's factory during fabrication and at factory tests shall not relieve any of the obligations of the Contractor under this Contract.
- (e) Type, sample and routine tests shall be to the relevant American Standards or other approved standards for equipment where the test requirements are not specified in this Specification.
- (f) The Contractor may offer type test results for identical equipment in lieu of the type tests specified, in which case the specified type tests may be waived by the Engineer. If type test results for identical equipment are offered in lieu of the specified type tests, the Contractor shall also provide evidence as to the similarity of the equipment tested and the Contract Plant.
- (g) The Contractor shall submit evidence to the Engineer that the instruments used for the tests have been calibrated at an approved testing laboratory within a period of up to 3 months for a portable instrument and 6 months for a fixed instrument.
- (h) The Contractor shall submit to the Engineer 4 certified copies of all results of all tests required under the Contract. The results of each test shall be recorded in the form of test certificates or test reports.
- (i) The results of tests shall be submitted to the Engineer within 1 month of the tests being carried out.
- (j) In the event of any test piece failing to comply with the requirements of the Contract, the Engineer may reject the whole of the material represented by the test piece.

(2) Tests at Site - General

(a) Responsibility for Tests

- (i) The Contractor shall conduct the Tests at Site
- (ii) The Contractor shall provide everything required to carry out the tests, including the provision, installation and removal of all test instruments and obtaining of all records. The Contractor shall provide certified test certificates to prove that all instruments have been calibrated by an approved laboratory not more than 3 months prior to carrying out the tests. The Contractor must specify items of testing equipments to be handed over to the Department.
- (iii) The Contractor shall prepare and submit the program to the Engineer for approval, schedules for each test together with a program for the Tests on Completion.
- (iv) The Contractor shall submit one copy of the results of each of the Tests at Site to the Resident Engineer at Site within one week of the tests being carried out. Four copies of the certified results of each of the Tests at Site in the form of test reports or test certificates shall be provided to the Engineer within one month of the tests being carried out.
- (v) The Department's staff may observe or participate in the Tests on Completion.

(b) Scope of Tests

The Tests at Site to be carried out and passed before taking over of the Works by the Administration shall be deemed to comprise two main stages of testing as follows:

- (i) Preliminary tests which are tests performed prior to rotation of, energizing at normal voltage or admission of normal water or air pressure to the main or ancillary Plant under test.
- (ii) The Tests on Completion which are tests to progressively prove the correct operation of complete ancillary systems and of the main Plant items.

The Tests on Completion shall include, immediately following all other tests, a test of service performance including 50 hours running. Where appropriate, the plant shall be connected to the PEA power system. The test shall include a total of 50 starting, and stopping sequences. The service performance tests shall be completed without adjustment and without fault. This shall be a prerequisite for taking-over.

S1.24 ELECTRICAL EQUIPMENT

(1) Motors

All motors shall be totally enclosed, fan-cooled type with provision for lubrication, suitable for operation in high ambient temperatures and high humidity conditions. Motors up to and including 1/2 hp shall be 220 V, single-phase. The exception to this will be motors on the emergency “essential services” but that must be 380 V, 3-phase. All motors above 1/2 hp shall be 380 V, 3-phase.

Unless otherwise specified, induction motors shall be of the direct-line starting, drip-proof type, and when operated, shall not develop trouble under a voltage fluctuation of +10 percent. The induction motors shall not be affected by a rise of 30 or 40 percent in voltage and frequency due to a full load rejection of the unit.

Motors shall be

- normal starting torque
- low starting current
- squirrel-cage induction type
- designed for full voltage starting
- drip tight or weatherproof
- totally enclosed.

Would rotor motors will be acceptable only if a squirrel-cage type were not satisfactory for the duty. The motors shall have Class B, 80°C temperature rise and continuous rating at 40°C ambient temperature and class F insulation. Motor lead insulation shall be Class B and cable terminal boxes shall be provided preferable with stud type connectors.

(2) Magnetic Motor Starters

Magnetic motor starters shall have the following features and/or accessories:

- (a) molded case circuit breaker disconnect with thermal time delay and instantaneous trips
- (b) 380 - to 220 -V individual fused control transformer
- (c) 220 - Vac operating coil
- (d) thermal overload protection in each phase - temperature compensated with thermal elements correctly related to motor nameplate, current and type of enclosure
- (e) auxiliary contacts for the control of related auxiliary devices such as motor heating, indicating lights, inter-locks, etc.

All starters shall be suitable for across-the-line starting of motors with manual resetting and under voltage release features.

All motors of 25 hp and above shall be provided with ammeters with suppressed scale for starting current and have motor full-load current deflection at roughly two-thirds of the scale.

All motors shall be provided with quick-break molded case circuit breakers with operating handle lockable in OFF position. They shall be rated to interrupt the full-load current of motor or other equipment in the circuit.

Magnetic contactors used in various switches shall be made of arc-resistant metal and have sufficient capacity against current onrush. The contacts shall be designed to obtain high contact pressure and positive seating to reduce contact bounce.

(3) Relays and Devices

Electric contacts of dial type thermometers, thermal relays, oil level relays, oil pressure relays, air pressure relays, limit switches, etc., shall be able to safely break a current of possible maximum inductive load (2A) and 125Vdc.

The contact surfaces (both male and female) for a transistor sheet (printed card) shall be gold plated. All printed cards shall be suitably treated to prevent damage to connection or components by hydrogen sulfide gas.

The relays (control, protection and auxiliary relays) and meters shall be air-sealed to prevent corrosion by hydrogen sulfide gas which will probably occur after water is impounded in the reservoir.

Mechanical targets (operated at 125 Vdc) shall be individually provided with any equipment that is annunciated as a group due to a faulty condition. In this manner the faulty equipment can be easily identified.

(4) Molded Case Circuit Breakers

All molded case circuit breakers shall have 2 or 3 poles as required, having thermal time delay and instantaneous trips with ON-TRIP-OFF indicating operating mechanisms. Circuit breakers used in conjunction with motor starters or contractors shall have the operating mechanisms interlocked with the starter or contractor cover, so that the cover cannot be opened unless the circuit breaker is open.

Circuit breakers shall be bolt-in type, interchangeable, temperature compensated, quick-make, quick-break type and shall comply with NEMA standards.

A group alarm contact shall annunciate an open breaker and each breaker shall have an individual light which shall come on when the breaker is open.

(5) Pilot Devices

Pilot devices such as selector switches, push-button stations, thermostats, etc., shall be of the heavy duty, oil tight type, housed in a dust-tight enclosure designed especially for the type of environmental. Local stop buttons neat the motors shall be lockable in pressed position for maintenance.

(6) Indicating Lights

All indicating lights shall be of LED type (E12) long life and service under conditions of shock, vibration and rough handling unless otherwise specified.

(7) Instruments and Meters

All instruments and meters shall have approximately 110 mm. dials, shall be of heavy duty industrial type, suitable for withstanding extreme shock and severe vibration.

(8) Convenience Outlets

Convenience outlets in the control cabinets shall be duplex 3-pin type rated for 15 or 20A at 250V, suitable for Thailand pattern plug as approved by the Engineer.

(9) Pressure, Level and Flow Switches

The sensing switches shall have weatherproof or dustproof enclosures and shall be mounted for easy adjustment and for rigidly cocking in position after being adjusted. They shall be of heavy duty rating and shall have stainless steel rotating parts and permanently lubricated bearings.

(10) Electrical Enclosures

Unless indicated otherwise in this Specification, electrical enclosures except junction boxes and pull boxes 4 inches trade size and smaller shall be as follows:

<u>Location</u>	<u>Enclosure type</u>
Indoor (nonhazardous)	
Dry area	NEMA 12
Areas where moisture conditions are more severe than those for which enclosures are intend	NEMA 12
Outdoor (nonhazardous)	NEMA 4
Hazardous areas	NEMA 4
	In accordance with the requirements of the National Electrical Code for the location

The construction of electrical enclosures located in areas subject to conditions classified in the National Electrical Code as hazardous shall be of a type designated by NEMA as suitable for the environment in which they are located.

Electrical switchboards, panels, and cabinets, except those of cast metal, shall be constructed from steel plate reinforced as required to provide true surface and adequate support for devices mounted thereon. Thickness of the steel plate shall conform to the requirements of UL50. Switchboards, panels, and cabinets shall be of adequate strength to support mounted components during shipment and to support a concentrated load of 91 kilograms on their top after erection.

Anti-condensation heaters, 220Vac complete with isolating switch, shall be provided in enclosure containing control or relay equipment, except when the external surface area is less than 0.5 m^2 (excluding the bottom).

The rating of the heaters shall be 20 W for each square meter of exposed surface area of the enclosure. Where the heat produced by the equipment during normal operation is equal to or greater than the output of the heater a thermostat shall be provided to control the heater.

All enclosures fitted with anti-condensation heaters shall have ventilation openings in the doors which shall be screened with vermin-proof and insect-proof fine brass gauze or a suitable filter and arranged to minimize entry of dust and prevent entry of water. Sealing of doors and covers shall be by closed cell neoprene foam sections on to surfaces at least as wide as the sealing section; water absorbent materials is not acceptable for seals.

Lighting shall be provided inside each enclosure large enough for a man to work inside. Luminaries shall be controlled by a fully enclosed door-actuated switch.

Where an enclosure contains fluids under pressure, compartments shall be provided to prevent damage to equipment by fluid leakage or discharges.

Finish painting inside enclosures shall be gloss white. The finished surfaces outside shall present a first class appearance of uniform color to adjacent enclosures. Equipment contained in enclosures shall be finish painted as if it were exposed to view.

A label showing the cubicle abbreviation shall be provided on the outside rear or cabling side of each enclosure.

(11) Ground Buses

A 6 mm by 25 mm cross-section bars copper ground bus shall be provided at the bottom of each enclosure to which the metallic cases of meters, instruments, relays and grounding circuits of all other equipment shall be connected. The ground buses shall be solidly bolted to the steel framework so as to make good electrical contact. Solderless lug or terminals shall be provided on the ground buses for terminating the copper ground cables from the grounding systems.

(12) Wiring

The wiring of the control cabinets, control boards, cubicles and control boxes for auxiliary equipment shall conform to the NEC and NEMA standards, shall be tinned, stranded copper switchboard wire, PVC insulated. All wiring shall be 2.5 mm² except for current transformer circuits which shall be 6 mm². All hinged wiring shall be extra flexible. The small wiring used in the semiconductor circuit will be excluded. The wiring for all instruments, relays and auxiliary devices of equipment and accessories shall be connected by ring tongue, crimp style terminals (amp terminal). All wiring shall be neatly and carefully installed in suitable wiring ducts with removable covers and complete to conveniently located terminal blocks for connecting to incoming and outgoing leads.

The terminal arrangement shall group all leads to facilitate connections to the incoming cables. Not less than 20 percent spare terminals shall be provided on each group of terminal blocks for terminating spare conductors in control cables and for future use.

Both ends of all wires shall be provided with terminal number rings and the number shall be recorded in the wiring diagram.

The interior wiring shall be concentrated on terminal blocks installed at a convenient height in the equipment or control cabinets in order to facilitate external cable connections. Wire runs shall be neatly trunked inside the switchgear or in wiring troughs. Conductor connections shall not be soldered except for essential requirements.

The terminals of motors or other equipment shall have pressure compression type terminal lugs.

The following color identification shall be applied to the insulation of wires used for back wiring of control cabinets, control boards, cubicles, control boxes and auxiliary equipments.

- | | |
|--|----------|
| - Secondary circuit of potential transformer | - red |
| - Secondary circuit of current transformer | - black |
| - dc circuit | - blue |
| - ac circuit except power circuit | - yellow |
| - Neutral | - green |

Three-phase outgoing cables shall be color coded as follows.

- | | |
|-----------|---------|
| - Phase 1 | - black |
| - Phase 2 | - white |
| - Phase 3 | - red |
| - Neutral | - green |

Direct current shall be color coded as follows.

- | | |
|------------|---------|
| - Positive | - white |
| - Negative | - black |

(13) Terminal Blocks

Terminal blocks shall be of the 600V molded block type with insulating barrier between terminals. Terminal blocks for current transformer secondary circuit shall be of short-circuit type. Terminal blocks shall be attached with a cover and the terminal number. Each terminal block shall have marking strips and shall be equipped with crimp style terminals for 2.5 mm² or more. Terminal blocks shall be provided with at least 25 percent surplus terminals as spares for each control board and cabinet. No more than two wires shall be connected to one terminal.

Terminal blocks shall be located in such a way that the incoming cables shall terminate neatly and conveniently. All numbered terminals on the schematic diagrams shall be brought out to the terminal block and labeled accordingly.

(14) Cables and Conduits

The Contractor shall furnish all control and power cables which will be used for controlling, operating and supplying power for Equipment of the power plant. The Contractor shall supply all conduits, accessories and fittings which will be required for laying the cables.

The Contractor shall allow for the following minimum of spare cores in each multi-core control cable.

NUMBER OF CORES IN CABLE	MINIMUM NUMBER OF SPARE CORES
Up to 5	-
Up to 12	2
Up to 20	4
Over 20	6

S1.25 OPERATOR TRAINING

The Contractor shall instruct the Administration's nominated staff in the operation and maintenance of the Plant during installation and commissioning and for a period of one month after completion of all site tests. The Contractor shall satisfy himself and the Engineer that the Department's staff are fully capable of operating and maintaining the Plant before leaving the Site. The cost of these services shall be included in the Contract Price.

SECTION 2
TURBINES AND GOVERNORS

SECTION 2 - TURBINES AND GOVERNORS

S2.01 SCOPE OF WORK

- (a) Two Kaplan vertical type turbines
- (b) Two electronic PID type PLC governors, each complete with hydraulic oil pressure unit
- (c) The spare parts for turbine, governor, and auxiliary equipment

The Contractor shall supply two (2) complete sets of vertical Kaplan Turbine together with spiral casing, adjustable runner blades, guide vanes, servomotor, draft tube, operating mechanisms, flywheel, anchoring materials, and the complete runner shall be mounted directly to generator shaft without any intermediate shaft or couplings and shall provide the necessary instruments, equipment and related components which are the parts of Turbine and Governor according to the specifications and requirements attached herewith.

Hill curve (or) Turbine Prototype Performance Curve indicating Allowable Operating Range, turbine prototype efficiency, guide vane and runner blade opening, output and discharge against net head shall be submitted together with the Bid and the curves which consistent with the guarantees relating to efficiency and output shall also be submitted.

Governor hydraulic oil pressure unit Diagram for governor including component arrangement, P&I Diagram indicating instruments and cooling equipment this specification Clause S2.03 shall also be submitted with the Bid.

Failure to comply the above information will subject to rejection of the Bid Proposal.

S2.02 TURBINE

- (1) Type

Turbine shall be Kaplan vertical type turbine with adjustable blade Kaplan runners and runner blades which shall be made of stainless-steel hub forged and machined in one-piece (mono-block), adjustable runner blades, servomotors for guide vane and runner blade with feedback transducer, etc.

- (2) Design Data

The main design data of the turbine shall be as follows:

- (a) Net Head (m)
 - Design 20.24
 - Head Range 13 – 22.24

(b)	Discharge/unit (m ³ /sec)	
	Design nominal (each)	3.62
	Discharge Range (m ³ /sec)	2.95 (at head 13 m) 3.65 (at head 22.24 m)
(c)	Capacity/unit (kW)	
	Guaranteed Values under net head:	
	Design Output	not less than 647 kW
(d)	Efficiency (%)	
	Guaranteed value for design net head and rated discharge	90
(e)	Frequency of Rotation (rpm)	
	Rated	600
(f)	Runaway speed (rpm)	not more than 1600
(g)	Direction of Rotation	
	View from generator	Clockwise
(h)	Couple to Generator	Runner directly mounted on generator shaft

(3) Requirements for Design and Characteristics

- (a) General: The turbine shall operate at any guide vane opening, under minimum head 13 meter and any load conditions (parallel or isolated) as specified without any unacceptable torque and/or pressure oscillations and without cavitation. The turbines shall be designed to get the best efficiency values at 80 to 100% load which will obtain the maximum value, and to reach the design rated turbine output power shall not be less than 647 kW.

Best turbine efficiency shall be obtained between 80 percent and 100 percent of 60 to 100% guide vane opening under 13 to 20.24 m design net head. The derivation of guaranteed efficiency shall be fully substantiated in the Bid and efficiency shall be preferably certified by the results of tests on prototype and/or model turbine homologous with those offered, together with a full account and justification of the method used in translating these results to the efficiencies guaranteed for the turbines offered for this project.

Failure to comply with this requirement will subject to rejection of Bid Proposal.

- (b) The total stored energy constant of the generator and turbine shall be not less than the minimum necessary for stable governing and the attainment of the specified and guaranteed pressure rise and speed rise.

The Bidder shall submit with the Bid calculation of speed rise, pressure rise and GD^2 needed for operating during normal and emergency shutdown of Unit (s) with isolated and parallel operation together with flywheel weight and dimension to be installed at the DE end of generator verifying that the Bidder's proposed Turbine and Governor PLC System can be connected and operated with dummy load (isolated) and the existing 22kV Grid system without any problem to the supplied equipment during emergency shutdown as well as without any hunting when synchronizing and connecting to the existing 22kV grid system.

Failure to submit this evidence will subject to rejection of Bid Proposal.

- (c) Frequency Regulation

The Contractor shall guarantee the maximum transient frequency change which will result from an instantaneous change of 50 Hz in any initially steady isolated load having a self-regulation coefficient of 1.0, being supplied by one turbine, or both with the permanent speed droop of 3 percent.

- (d) Speed Regulation

The Contractor shall guarantee the maximum momentary speed rise which can occur when the generator output corresponding to maximal power is instantaneously rejected from both units with a permanent speed droop of 3 percent. The maximum momentary speed rise shall be designed not to exceed 60 percent. The Bidder shall submit the proof or calculation to justify the regulation with the Bid.

- (e) Pressure Regulation

The Contractor shall guarantee that the maximum pressure rises which can occur in the penstock pressure conduit or turbine inlet on instantaneous load rejection of units which shall not exceed 30m of water at the elevation of turbine center. This guarantee shall apply for all conditions of normal and emergency operation, (i.e., all plant functioning correctly).

The Bidder shall submit the evidence and calculation to justify the regulation with the Bid.

(4) Turbine Dismantling Arrangement

Dismantling of Turbines shall be done after removing generator and its related parts. All major turbine parts shall be provided with eyebolts, lugs or lifting devices. Special dismantling tools such as runner removing tool, generator tilting device shall be provided during installation or dismantling of turbine or generator.

(5) Runner

- (a) The runner shall include runner hub, and runner blades. Runner hub shall be made of forged stainless steel in single piece mono-block and shall use wear and corrosion resistant Chrome-Nickel-Steel 1.4313 or higher material in strength. Runner blades shall be made of W.N. 1.4313 or W.N: 1.4317 or higher and shall also be made of forged stainless steel in single piece mono-block.

All other runner components shall be of stainless-steel alloy using material type Chrome-Nickel-Steel (X5Cr Ni 13.4), where applicable.

The runner blade shall be adjustable and shall be manufactured by using minimum 5-axis CNC milling machine for highest precision profile with lowest manufacturing tolerances so that any welding or casting is not allowed. Furthermore, the final the proper polishing process shall also be applied to achieve smooth surface condition.

Evidence for proofing this shall be submitted with the Bid proposal.

- (b) The water passages of the runner shall have a center-line-average surface finish of 0.006 mm or finer and surface undulations shall not cause S/L to exceed 0.005, where S is the deviation from the design profile measured normal to surface and L is the distance along the surface over which S occurs.
- (c) The pitting due to the cavitation occurring on the runner after 8,000 operating hours shall be less than:

$$W = 1.2 D^2 T/8,000$$

Where: W = maximum permissible weight loss, kg
D = runner discharge diameter, m
T = operating hour, hrs.

The allowable reduction in metal thickness of any component shall not exceed more than 0.7mm of a single continuous area of 0.0025 m². The

damage in any runner passage shall be less than 5 percent of the total surface area of the water passage.

Inspection of damage shall be made by the Contractor prior to the end of Maintenance Guarantee Period.

The Bidder shall submit the cavitation guarantee calculation (or) verification as per this clause together with the Bid.

The Bidder shall also submit certified test results of relevant turbine model and of comparable machines to verify and demonstrate that the proposed turbine model and this setting shall be confirmed by the results of submitted model tests and cross-correlated with the Contractor's field experience and/or accelerated cavitation tests.

Failure to submit this evidence will subject to rejection of Bid Proposal.

- (d) Any runner which during the guarantee period specified in sub-clause (c) shows cavitation pitting exceeding 1.5 mm in depth below the original surface, over a continuous area greater than 0.0025m² shall be replaced by the Contractor, at his own expense. If such a replacement runner is required, the Contractor shall prove to the satisfaction of the DEDE Engineer that the replacement runner embodies modifications which will preclude the deterioration which occurred on the original runner.
- (e) The provisions of this clause shall not include pitting and corrosion due to the presence in the water of foreign elements, dissolved or suspended.
- (f) The above cavitation guarantees shall be for operation at the normal heads corresponding to the specified operating head ranges.
- (g) The mass of material removed from a runner due to cavitation, erosion or corrosion shall be calculated from the amount of weld repair electrode required to return the runner to its original profile, minus a grinding allowance which shall be agreed between the Contractor and DEDE Engineer before the repair of a runner commences. Templates derived from the model runner for contractual inspection of the runner before delivery, shall be used for checking the above cavitation guarantee. The Contractor may propose an alternative method of assessing the mass of metal removed.
- (h) Each runner complete with runner seals shall be statically and dynamically balanced and the runner material verification and balancing report shall be submitted to DEDE during manufacturing period and before delivery. The

runner and generator shaft shall be designed properly and precisely to be fitted together during manufacturing assembly stage and delivered separately to project site.

- (i) They shall be aligned and assembled at site during installation period under manufacturer's supervision at the Contractor's premises.

(6) Guide Vane

The turbine shall be equipped with stainless-steel guide vanes and guide vane stems shall be of stainless-steel according to W.N 1.4313 or ASTM 743 Grade CA-6NM. The guide vane shall be uniform in shape and their cross section shall be to direct properly and accelerate gradually the water entering to the runner with minimum friction and hydraulic disturbance.

Guide vanes shall be accurately machine and ground to a smooth finish and even surface so that all guide vanes shall be replaceable and interchangeable.

Guide vanes shall be carefully and precisely fitted along the line of contact during factory assembly within 0 to 0.05mm maximum clearance between guide vanes to ensure minimal leakage against with the head pressure in penstock.

Guide vane stems and link shall be designed to minimize friction and shall be connected through coupling, link, and lever to the regulating ring.

The design shall be such that repairs, and replacement be easily and quickly made with minimum dismantling to the turbine parts.

The suitable shear pin or breaking link shall be provided between every second guide vane stem and the regulating ring shall be strong enough to withstand maximum normal operating forces, but which will break or release on excessive forces acting either opening or closing direction and shall protect the rest of mechanisms from damage in case one or more guide vanes become blocked.

The shear pin shall be equipped with inductive switch on each second guide vane provided alarm and failure signals to Governor PLC Cubicle for protection.

Failure to comply with this will subject to rejection of Bid Proposal.

Guide Vane and Runner Blade Servomotor

The turbine shall be equipped with the oil pressure operated hydraulic servomotors for guide vane and runner blades separately. The servomotors shall be designed to

operate at the maximum forces to hold closed under maximum operating head at the minimum oil pressure.

The servomotors shall be capable of operating guide vane or runner blade from completely closed position to fully opened position in one stroke vice versa.

The servo cylinder and piston rod shall be made of stainless steel and piston rod shall be provided with self-lubricating bushings.

The suitable pointer or scale showing opening and closing percentage of both guide vane and runner blade positions.

(7) Regulating Ring and Guide Vane Position Feedback

- (a) The regulating ring shall be designed to withstand the prototype forces and torques calculated from the measured torques from all guide vanes.
- (b) The operating mechanism of guide vane and runner blades shall be provided individually by using magnetostrictive type linear position sensors with feedback transducers to send position feedback signals back to Governor PLC. Furthermore, since the output from sensors corresponds to an absolute position, rather than a relative value, it is not required to recalibrate the sensors.

Failure to submit the evidence will subject to rejection of Bid Proposal.

Permit it to become out of step with the other vanes should it meet an obstruction in either the opening or closing direction. The system shall permit only minimum required amount of relative movement of the affected vane (s).

- (c) Permit it to become out of step with the other vanes should it meet an obstruction in either the opening or closing direction. The system shall permit only minimum required amount of relative movement of the affected vane (s).
- (d) The bearing bush in the regulating ring and guide vanes shall be of the greaseless, self-lubricating type.
- (e) The regulating ring and position sensors with feedback transducer shall preferably mounted on the upper side of the turbine spiral casing.

(8) Turbine Setting

- (a) The centerline of the penstock pipeline at inlet to the power station has been set at EL. +241.10 The Contractor shall set the machines on floor slab and shall provide structural design of machine foundation to civil contractor.
- (b) Each runner complete with runner seals and blades shall be statically and dynamically balanced and the runner material verification and balancing reports shall be submitted to DEDE during manufacturing period and before factory acceptance test and delivery.
- (c) The runner and generator shaft shall be designed properly precisely to be fitted together during site assembly and delivered separately to project site.
- (d) They shall be aligned and assembled at site during installation period under manufacturer's instruction (or) supervision at the Contractor's premises.

(9) Draft Tube

- (a) The draft tube shall generally comprise a draft tube bend, stiffeners, and steel liners. The middle portion of the draft tube shall be in concrete, the construction of which forms part of the civil works contractor. A block-out opening for anchor bolts will be provided for the civil works contractor for installation of the steel draft tube sections. It is the full Contractor's responsibility to ensure that the proposed concrete arrangement and elevations given will meet and achieve the guaranteed turbine efficiency as proposed.
- (b) The design of the draft tube bend, stub pipe and liner shall ensure stiffness against vibration and deflection due to hydraulic loads; the design shall also provide adequate strength against both internal and external pressure.
- (c) The draft tube bend shall be of fabricated steel construction with flanged connections for attachment to the discharge ring and stub pipe. The inside of the cover plate shall be flush with the inside surface of the bend.
- (d) The draft tube liner shall be of fabricated steel and shall include a flanged stub pipe for connection to the draft tube bend. The liner shall be fabricated so that site joints are minimized. The sections may be bolted or welded together at Site. All welding site shall be watertight. Bolted joints shall be sealed by internal welding.
- (e) The draft tube liner shall be securely anchored to the surrounding concrete and shall be provided with adequate longitudinal and circumferential stiffeners and anchor straps. The Contractor shall provide to the civil works contractor all necessary anchor bars for embedment in the first stage concrete.

- (f) All ribs, stiffeners, box-sections, and the like attached to the liner shall be provided where appropriate, with ample cut-outs adjacent to the shell plate to allow the free flow of grout along the surfaces.
- (g) Each section of the liner shall be adequately stayed to prevent distortion during transport, storage, erection, and concreting.
- (h) The steel draft tube liner sections shall be installed by the Contractor in the block-out provided by the civil works contractor.
- (i) Second stage concrete for embedment of the draft tube liner will be provided and placed by the Contractor.

(10) Spiral Case and Stay Ring

- (a) The spiral case and stay ring shall be designed to withstand all loads which can arise under the specified conditions, including hydrostatic testing. In addition, the design and manufacture shall embody specific provisions against fatigue cracking for an assumed 35,000 pressure cycle life.
- (b) The design of the stay ring shall give particular attention to avoidance of stay vane vibration resulting from vortex excitation.
- (c) The spiral case shall be of welded steel plate and the stay ring of cast or fabricated steel. It shall be supplied in one piece.
- (d) The spiral case sections shall be joined to one another and to the stay ring by butt welds and will be NDT (UT and PT) inspected. Welded joints between adjacent shell plate strakes shall not coincide with joints between stay ring sections.
- (e) An air admission and bleeder with isolating valve shall be provided at the highest point of the spiral case. Discharge from the air bleed shall be reticulated to drain.
- (f) The turbine casing shall be provided with all necessary supports, shims, anchor bolts, jack screws and soleplates.
- (g) The water passages of the stay ring and stay vanes shall have a centerline-average surface finish of 0.006 mm or finer and surface undulations not exceeding those specified in Clause (5).
- (h) The Contractor shall provide suitable mountings for the spiral case and stay ring such that all loads exerted by the machine may be transmitted safely to the floor slab.

- (i) A minimum diameter of 200 mm inspection hole shall be provided in the spiral case. The inner surface of the hole-cover shall fit flush with the form of the inside of the spiral case.
- (j) The deepest point of the spiral case shall be equipped with a valve of minimum 50 mm diameter and drainpipe leading to the tailrace.

(11) Head Covers

- (a) The covers shall be of stainless steel and sufficiently rigid so that deflections under service condition have no adverse effect on the performance of the turbine.
- (b) The covers shall be fitted with fixed stainless-steel seals for the runner and stainless-steel liners for the stay vanes; these seals and liners shall be replaceable. The stainless steel used shall be to a weldable grade. The Contractor shall demonstrate by representative tests that the composition of the liners is such that in the event of contact between the stay vanes and liners or rotating and fixed seals that galling or pick-up will not occur.
- (c) Means shall be provided for checking the clearance between the fixed and rotating portions of all runner seals in at least four equally spaced points around each seal diameter, with a minimum of dismantling.
- (d) Any portion of the cover subject to water flow shall be overlaid with stainless steel. A stainless-steel liner shall be provided in the bottom cover/draft tube bend which shall extend at least 300 mm downstream from the runner outlet.
- (e) No joint rings or gaskets which cannot be renewed after completion of the installation shall be incorporated.
- (f) A system shall be provided for correcting any deviation in hydraulic thrust from the designed value including deviation due to wear in the runner seals. A provision acceptable in principle for this purpose would include pressure balance pipes connecting the head over/runner crown space to the discharge cover/runner skirt space and separate pipes connecting these spaces to the draft tube, all such pipes being provided with needle control valves.

(12) Shaft Seal and Gland

- (a) The shaft seal shall be replaceable set industrial heavy-duty lip seal type having metal housing and suitable for vertical shaft application.

- (b) The seal housing shall be split type and shall include labyrinth and axial/radial seal acting like a radial water pump during turbine spinning. The labyrinth shall prevent water to spray out of seal box between the seal and it shall also drain all water which is not retain by lip seal.
- (c) In case of the shaft seal is worn out, the water flow at seal drainage shall be increased so that the shaft seal set shall be easy to be replaced.
- (d) The Contractor shall design and ensure that the strainers provided with the cooling water system specified in the Clause S5.01, are fine enough to provide water suitable for using with turbine shaft seal.
- (e) A water thrower shall be provided for the gland to direct any water leakage to a collecting system which will reticulate the leakage water to drain.
- (f) The Bidder shall submit detail shaft seal information such as technical details, product information and constructional drawings together with the Bid.

(13) Turbine Control Instrument Cubicle

(a) Construction

The cubicle shall be made of steel plate not less than 3.0 mm thickness. A hinged door shall be provided with IP 65 class together with all necessary cables and wiring shall be provided. The turbine Control Instrument Cubicle shall also be known as Manual Turbine Control Cubicle and to be located in the same floor with turbine and shall be equipped with instrumentation, indicating meters, lamps, switches, push buttons and it shall also be operate manually for hydraulic pressure unit, lubrication oil system, inlet valve, and other devices which are used to operate the equipment manually and during maintenance test operation.

(b) Instruments and Components to be mounted on the Cubicle

The following instruments shall be mounted in front of the cubicle and shall send their output signals and data values to SCADA PLC and Governor PLC Cubicles for control, monitoring and protection purposes and operator shall also see, read and record easily during Unit manual operation.

Temperature Indications with 4-20mA signal, alarm outputs and trip contacts for each unit

- Generator winding temperature (Stator, Rotor)
- Generator bearing temperatures (DE, NDE)

- Generator bearing oil temperature (DE, NDE)
- Governor oil tank temperature
- Lubrication oil temperature (inlet, outlet)
- Cooling water temperature

Pressure gauges/ indications with 4-20mA output for each unit

- Penstock pressure
- Spiral case pressure
- Governor oil tank pressure

Other indication meters, Switches and Buttons for each unit

- Digital Speed Indicator with 4-20mA signal output
- Guide vane position indicator with 4-20mA signal output
- Runner Blade position indicator with 4-20mA signal output
- Emergency Push Button
- Intel valve position indicator (Open /Close)
- Start/ Stop Push Buttons - Hydraulic Pressure Unit
- Start/ Stop Push Buttons – Lubrication Oil System Unit
- Cooling Water System Valve Open/ Close Switch
- Local/ Remote Selector Switch

(14) Protection and Alarms

The Contractor shall provide protection functions for pressure, flow, temperatures and speed for Generating Units as per Setting Values such as alarm and trip set points as recommended by Main Equipment Manufacturers and shall also be set in Governor PLC Cubicle as alarm and protection setting functions for safe and longtime operation of the Units. Electrical Protection functions shall be provided according to the “Protection and Relaying Functions” specified under Control, Protection and Alarm Section as well as the applicable international standards.

In addition to the devices listed, the Contractor shall provide such other protection and alarm devices of all of them necessary for the safe operation of the turbine, governor, inlet valve and ancillaries and shall include for these in the Bid Price.

S2.03 GOVERNOR

(1) Type

- (a) The turbine shall be provided with the digital type automatic PLC type PID controlled electro-hydraulic governing system with PLC modules with

hydraulic oil pressure unit with oil tank to operate the generating Units. The proposed system shall be independent, adjustable, monitor and control turbine guide vane, runner blade, inlet valve, lubrication oil system, cooling water system, AVR excitation, generator speed and temperatures to operate with an adequate margin of stability under all steady state and transient load conditions without hunting and shall cause the Units to operate stably and satisfactorily operation during dummy load test and in parallel with each other and/or the interconnected with 22kV PEA Grid system.

- (b) The governor shall be of PLC type PID controlled with an established reputation of satisfactory and reliable service. DCS Controller type will not be acceptable.

The proposed PLC and related products shall be available in international market including the related instruments and components which shall also be available to purchase in every country.

Evidence of using PLC Controlled Governor and the product catalog/information and the proposed license software used shall be submitted with the Bid.

- (c) The speed signals for the governor shall be derived from two (2) speed detectors of inductive type sensors at generator side which are not allowed to be used for other functions. The source for the speed signal shall be wired directly to the dual channels speed monitoring relay (accuracy 1% for frequency measurement and 0.5% of measured values) at governor PLC Cubicle without fuses or other electrical protection devices and it shall not be damaged by short-circuits.

Dual Speed monitoring relays shall be transmitted 4-20mA signal to PLC Analog Modules without any failure during operation and it shall be mounted inside Turbine Control Instrument Cubicle and Governor PLC Cubicle. Extra speed monitoring module 2 sets shall be provided as spare.

Evidence of the above requirements shall be submitted with the Bid together with product catalog/information, type, and model, etc.

- (d) The source for the speed signal shall be sufficiently free from any interference or distortion to ensure stable speed control of the unit and it shall have sufficient resolution to ensure accuracy of speed control. The Contractor shall also provide suitable frequency and load reference sources for the governor.

- (e) The proposed location for the major items of governing equipment shall be proposed in the Bid and Governor PLC Cubicle shall be installed inside Control Room separately with Hydraulic Pressure Unit. The Bidder shall submit the Locational Layout and Dimensional Drawings for both Governor PLC Cubicle and hydraulic pressure unit inside powerhouse. The attached PLC Governor Cubicle with hydraulic pressure unit design shall not be acceptable and rejection of Bid Proposal.

Governor PLC Cubicle (front door opening layout drawings) with component descriptions shall be submitted to verify that Bidder complies and meets with the above requirements.

Failure to submit the above requested evidence will subject to rejection of Bidder Proposal.

(2) Governor PLC Cubicle

- (a) Governor PLC Cubicle shall be located inside Control Room separately with governor hydraulic pressure unit so that Bidder shall submit the locational layout of Governor PLC Cubicle and hydraulic pressure unit inside control room and powerhouse turbine floor.

The combined PLC Governor Cubicle with hydraulic pressure unit design shall not be acceptable and rejection of Bid Proposal.

Governor PLC Cubicle (front door opening layout drawings) with component descriptions shall be submitted to verify that Bidder complies and meets with the above requirements.

Failure to submit the evidence will subject to rejection of Bid Proposal.

- (b) Power Supply to the Governor PLC Cubicle shall be 230Vac, 400Vac and 125Vdc supplied from Station Service AC-DC System and conversion of 24Vdc for PLC components is allowed to supply CPU, IOs, Communication Modules, HMI Touch Screen, AVR Modules, Speed Monitoring Modules, Contactors, Auxiliary Relays, Panel Lamps and other related component inside this panel.
- (c) The Cubicle shall be provided with minimum 12” HMI Touch Screen, PLC CPUs, ethernet modules, power supply modules and analog I/O modules, digital I/O modules, RTD input modules, modbus modules and all these components shall be manufactured under the same manufacturer name with same system platform or protocol.

Evidence of the above requirements shall be submitted with the Bid

- (d) All parameter as stated in this clause which are related for monitoring and controlling shall be shown/ indicated on HMI touch screen panel.

The Bidder shall submit the HMI screen parameter pages with the Bid to verify that Bidder complies with Bid requirements.

Failure to submit the evidence will subject to rejection of Bid Proposal.

- (e) The panel shall also be equipped with annunciator window (32 windows), selector switches, buzzer alarm, digital meter (revenue grade class 0.2s), auto synchronizing relay, emergency push buttons at front panel door and ethernet switching ports, contactors, auxiliary relays, MCCBs, terminals, receptacles, panel lamps and thermostat heater shall be at inside panel.
- (f) The proposed Governor PLC Program shall be licensed software and shall be submitted with Bid as evidence. Contractor shall write ladder PLC program in the proposed licensed software which shall be the same manufacturer with PLC provided.

Any own developed control software programs are not acceptable and result for rejection of Bid proposal.

Failure to comply with this requirement will subject to rejection of Bid Proposal.

- (g) Contractor shall install Auto Synchronizing Relay at Governor PLC Cubicle or SCADA Cubicle inside Control Room together with Auto/ Manual Synchronization selector switches, Unit selector switches, Manual breaker closing switch, lamps, and other related lamps, etc. The compact combined AVR with synchronization functions is also allowed and Bidder shall submit evidence with Bid proposal.

Bidder shall submit the control and monitoring descriptions with the proposed Control System Configuration and Control Logic Sequence Diagrams for Normal Start/ Stop/ Emergency Stop for Unit operation until connection with dummy load (isolated load) and parallel with Grid stated in this section to verify that Bidder complies with Bid specifications.

Failure to submit the evidence will subject to rejection of Bid Proposal.

- (f) Digital Power Meter/ Energy Meter for each generating unit shall be provided at each front panel and the meter shall be of revenue grade meter type having accuracy class 0.2 or better.

The Bidder shall submit the product information for the above items together with the Bid.

Failure to submit the evidence will subject to rejection of Bid Proposal

(3) Governor PLC capabilities

- (a) The governing system shall be suited to communicate and afford all facilities necessary to meet the monitoring and control system requirements as per Section 11 so that Governor PLC System shall be one of the system to be controlled by SCADA system and provision for this requirements shall be provided.
- (b) The turbine generator unit shall be started operation by the Governor PLC Panel as Unit Control and the PLC shall be monitored and received all faults, trip signals, reset signals, emergency interlocking of all related systems before starting the Unit. The start operation of the Unit shall be performed by UNIT START push button after clearing and selecting the mode of operation such as LOCAL/ REMOTE or AUTO/ MANUAL at the front panel. The Operation of the Unit is also available at HMI Touch Screen for each Unit.

The Unit shall be started operating by opening Inlet Valve, Lubrication Oil Supply Unit, Guide Vane and Runner Blade opening, speed sensing, speed adjusting until the Unit reaches at rated speed without excitation.

After this step, the PLC shall send START EXCITATION command to Automatic Voltage Regulator (AVR) to excite the rated voltage in generator winding therefore generator voltage and current sensing instruments shall be connected to Governor PLC for this function together with Auto voltage adjusting (raiser/ lower) functions to let AVR to maintain the generator at its rated voltage.

The proposed system shall be synchronized at 3,300V medium voltage switchgear so that at that time of the Unit reaches at rated speed and voltage, the PLC shall transfer the synchronization function to Synchronizing Relay to perform Synchronization.

Each Unit shall be generated 3,300V at its rated speed and it shall be synchronized at 3,300V medium voltage switchgear and synchronizing relay shall send circuit breaker closing command to connect 3,300V bus voltage.

The synchronization function shall be performed one for each Unit and it shall be selectable by using synchronization selector switch at front panel.

Depending on the load demand point set by Operator at Governor PLC, the Unit shall be capable of adjusting guide vane, runner blade, and AVR by sensing the feedback signals.

The governor PLC shall be capable for operating responding to deviation in frequency of 5% and greater and shall be capable of responding to load changes greater than 5 percent of rated capacity of initiating servomotor movement within 0.2 s and also load fluctuations of 5 to 10 percent rated capacity by damping the fluctuation to 10 percent of the initial fluctuation within 10 seconds without hunting. However, during dummy load test conditions, the Unit shall be able control the load increment as an isolated operation by controlling guide vane with less frequency fluctuation.

The governor PLC shall provide the facilities listed below:

- 1) Means for adjusting and locking the damping time constant between zero and 4.0 s.
- 2) Means for adjusting the temporary speed droop from 10 to 60%.
- 3) Means for adjusting and locking the accelerometer time constant between zero and 3.0 sec
- 4) Means for adjusting the governor speed setting over at least the range +5 percent to -10 percent of normal speed while operating or stationary.
- 5) Means for adjusting the load set point from 0 to 110 percent of rated generator load for electro-hydraulic governor only.
- 6) A guide vane stroke limiting device.
- 7) Means for adjusting permanent speed droop to any valve between 0 and 6%.
- 8) Provision for adjusting and locking the openings and closing times of the guide vanes within a range incorporating a minimum time of 3.0 sec. If a stepped rate of guide vane closure is used there shall be provision for the independent adjustment of the position and timing of the step (s); and
- 9) Provision for sending command to AVR to start excitation and to control generator voltage at its rated.
- 10) Provision for generator voltage and current sensing for protection and synchronization functions.
- 11) Monitor and Protect generator from overspeed, overload, over voltage and over temperature for both bearings and windings.
- 12) A device for closing the guide vane as part of the stop and shutdown sequences.

13) Temperature monitoring for each Unit

- Governor oil tank temperature
- Lubrication Oil temperature
- Cooling Water temperature
- Generator Winding temperature (Stator, Rotor)
- Generator bearing temperatures (DE, NDE)
- Generator bearing oil temperature (DE, NDE)

14) Other indication/ measuring meters for each unit

- Speed measuring device with 4-20mA output
- Guide vane position feedback device with 4-20mA output
- Inlet valve position indicator open /closed
- Vibration monitoring device at DE and NDE of generator bearing

(4) Governor Hydraulic Pressure Unit (HPU)

- (a) A complete governor pumping system shall be provided for each unit. Each system shall supply hydraulic oil for the opening and adjusting guide vane and runner blade servomotor and the inlet valve servomotor and brake. Servomotor cylinder shall be operated with proportional directional valve with on board electronics-controlled type. Other cylinders shall preferably be operated with solenoid control valves 4/3 or 4/2 type. All directional control valves with ED100% duty must be equipped with adjustable power reducing plug to reduce coil temperature.
- (b) Bidder shall provide the compact hydraulic pressure unit with integrated pressure accumulator tank designed as per ASME Boiler and Pressure Vessel Code, Section III to resist the maximum allowable operating pressure. It shall be equipped with all necessary elements for safe and reliable operation, including pressure control, level control, temperature control and oil directional control valves, oil strainers at suction line of each pump, safety (relief) valves, check valves, and hand operated emergency valve etc.

Hydraulic P&I diagram showing the control functions and capabilities of the proposed governor described in the above Clause (a) and (b) shall be submitted in the Bid.

- (c) Two (2) AC motor-driven vertical pumps with motor suitable for operation at 380Vac shall be provided as normal and standby duty pumps respectively complying with IEC standards IP 54 Class H Insulation. The rated capacity of each pump shall be sufficient for unit operation under all conditions: normal operation start/stop, and emergency stop of the unit. Each pump should be capable to fill the pressure accumulator from zero pressure to minimum operating pressure within 1.5 minutes or less. Each pump shall be complete

with at least its own components such as suction filter cartridge, check valve, pressure relief and fast pressure inspection port valve.

- (d) The pressure unit shall be equipped with instrument plate above the sump tank at the level of visible human height to see the instruments easily during operation. All instruments (except oil level) gauges, flow meters, indicators shall be installed on the instrument mounting plate. The arrangement of the unit shall be easy to set from the front side. At the backside of the hydraulic pressure unit, only pipes and their connections shall be installed.

The preliminary components layout arrangement drawings for Hydraulic Pressure Unit shall be submitted in the Bid to verify that Bidder complies the above requirements.

- (e) The governor hydraulic pressure unit shall be designed with an opened vessel type with sufficient capacity in the sump tank to prevent pollution in case oil leakage on the hydraulic pressure unit. Oil sump tank shall be provided with oil level gauges, oil temperature gauges, service manholes and drain valves.
- (f) The bladder type nitrogen accumulator tank shall be provided with sufficient capacity to provide safe stopping of the unit (with safety factor 1.5) in case of both, too low oil pressure system announced and both oil pumps out of operation.

The unit shall be installed with at least two (2) small nitrogen bladder accumulators and layout drawings shall be attached with Bid to comply this requirement.

- (g) The pressure unit oil pipe work shall be properly arranged for the reliable operation so that oil cannot be drained out from the cylinder control valves or pipe during the oil pressure supply is OFF. Only stainless seamless pipe and materials shall be used for oil pipes with connectors, and flexible hoses, etc. Sump tank and instrument plate shall be made of stainless-steel material. All oil pipes shall be designed with limitation of maximum oil flow velocity of 3m/s during normal operation and 5m/s during emergency and/or quick shut down.

The oil sump shall be fitted with extra suction and return pipe of size 3/4".

- (h) The following instruments shall be fitted at hydraulic pressure unit: -
- Oil pressure gauges, minimum diameter 100mm
 - Oil flow sensor with 4-20mA output
 - Oil pressure switches with contacts
 - Temperature gauges with contacts

- Oil pressure filter duplex type with pressure difference contact
- Oil level switch with contact (low and too low)

All instrument signals mentioned above shall be wired to local terminal box and providing signals to Governor PLC Cubicle for alarm and protection trip sequence to protect the Units from unnecessary damage so that PLC logic sequences shall include these instrument signals for protection.

All instruments and gauges (excluding oil level) shall be fitted on the instrument plate, approximately on eye height around 1.2 meter or higher, convenient for operator to monitor.

- (i) Double high-pressure filter shall be fitted in the main oil pressure supply line, fitted with visual indication and digital signal to indicate that the filter is clogged. They shall be of sufficiently fine filtering capacity to prevent damage to any portion of the governing system by foreign matter Cartridge type strainers shall be capable of being individually replaced without shutting down the governor.
- (j) Hydraulic pressure unit and its operation should preferably be designed without external cooling and/or heating required and shall be designed with reduced energy consumption, meaning that during normal operation of the unit, oil temperature will not exceed ambient temperature for more than 15°C.

The Bidder shall submit the P&I Diagram comprising with technical information or catalogs of the proposed components with the Bid to proof the Bidder complies the above requirements.

Failure to submit the above information will subject to the rejection of Bid.

- (k) Portable Oil Centrifuge Unit

One portable oil centrifugal unit of 200 L/h capacity shall be supplied to use in the station. The oil centrifuge unit shall be suitable for removing water, metal particles and other foreign matter from all lubricating and regulating oil systems. The unit shall be mounted on a rubber type trolley, shall be suitable for unattended operation and shall be supplied complete with:

- Motorized centrifuge unit, with all wetted parts of corrosion resistant material. All wearing parts shall be renewable.
- Motorized pumps to feed dirty oil and to discharge treated oil from the centrifuge.
- Electrical heaters with thermostatic control to bring the oil to the correct temperature for centrifuging.
- Regenerative heat exchanger to heat incoming oil and cool outgoing oil.

- Control panel with all necessary starter and heater controls.
- All necessary thermometers, pressure gauges, sight glasses and flow indicators.
- All necessary piping, valves, flexible suction and delivery hoses and tools.

The operation of the centrifuge unit shall be such as to minimize aeration, frothing and foaming of the oil.

SECTION 3
INLET VALVES

SECTION 3 - INLET VALVES

S3.01 TYPE AND CONSTRUCTION

- (1) The turbine shall be provided with an inlet valve of the butterfly type designed for minimum head loss and disturbance and having a net cross-section area at the throat not less than of the spiral case inlet.
- (2) The main elements of the valve shall be of cast, forged or fabricated steel. If fabricated construction is used, all welds stressed directly or indirectly by pipeline pressure shall, to the maximum extent practicable, be full penetration butt or tee-butt welds. All wearing parts shall be renewable and all such parts in contact with water shall be of corrosion resistant material or sleeved with corrosion resistant material.
- (3) The sealing shall be by solid, rubber to metal, contact between the rotor seals and the body seats and shall not involve inflation or other similar forms of relative movement of elements in the seals or seats. If metal to metal contact between seal and seat is used the material shall be such that galling or pick-up cannot occur on contact. To this end the hardness of any parts between which contact or sliding occur shall differ by at least 50 Brinell hardness.
- (4) The trunnion and servomotor connecting rod bushes shall be of greaseless, self-lubricating type. Should weight closed valves be offered, provision shall be made to prevent dirt and foreign matter from entering the top of the servomotor.
- (5) The seal leakage during both shop and site tests shall not leakage under a head of 40 m. of water column.
- (6) The seals, seats, trunnion bushes and trunnion glands shall be so arranged that they can be removed or installed without dismantling the valve bodies or removing the valve from the pipe line.
- (7) The Contractor shall provide steel pedestals to support the valve and transmit all loads from the valve to the floor slab.
- (8) The Bidder shall submit the layout arrangement of Inlet Valve and bypass valve together with dismantling pipes and drain pipe shall be submitted with the Bid.

S3.02 OPERATION

- (1) The valve shall be capable of opening by governor pressure oil system and closing against any flow up to and including that due to free discharge at the outlet of the valve with maximum water level in the upper reservoir.
- (2) The valves shall be operated by oil pressure supplied by the governor pressure oil system. Operation in close direction shall be by counter weight.

- (3) The hydraulic piston and its mounting, pressure piping and control valves shall be adequate for the pressure operated by pressure unit with the most adverse conditions of unbalanced closure against free discharge.
- (4) A manually operated mechanical lock for securing the inlet valve rotor in the closed and open position shall be provided and shall be of adequate strength to resist the thrust of the servomotor in both the opening and closing directions. The locks shall embody provision for padlocking in the inserted and withdrawn positions.
- (5) A system shall be provided for automatically checking, collecting and returning oil to the governor oil sump tank any oil leakage of the servomotor.
- (6) The initiation of opening of the inlet valve shall be interlocked with the establishment of a pressure in the spiral casing substantially equal to pipeline pressure.
- (7) The inlet valve opening and closing times shall be independently adjustable but the adjustments shall be of a form that cannot be readily or inadvertently altered. In the interests of minimizing the times necessary to start up and to shut down in an emergency, the opening and closing times shall be the minimum consistent with safe operation.

S3.03 CONTROL AND INDICATION

- (1) The control gear shall be such that the inlet valve may be opened and closed by local manual mechanical control and remote control as part of the starting and stopping sequence. The valve controls shall be kept as simple as possible consistent with their function.
- (2) Position indicators visible from the floor of the Machine Bay shall be provided for the bypass valve, inlet valve rotor and mechanical lock.

S3.04 BYPASS VALVE

- (1) The inlet valve shall be provided with a bypass valve, pipes and fittings, preferable around 100 mm diameter. The bypass valve when opened shall be such as to ensure substantially balanced pressure between upstream side and downstream side across the inlet valve, during the guide vanes and inlet valve are closed before starting the turbine-generator. A manually operated gate valve (normally open) shall be provided upstream of the bypass valve.
- (2) Each bypass valve shall be mounted directly on the connecting pipe or valve body and shall be complete with a pipe connection to the isolating valve which shall be mounted directly onto the penstock. The bypass valves shall be operated by oil pressure from the governor pressure oil system or electricity. Means shall be provided to ensure positive segregation of oil and water circuits.

- (3) All wearing parts of the bypass valves including those susceptible to erosion or cavitation shall be renewable and those in contact with water shall be of stainless steel or bronze.

S3.05 DISMANTLING JOINT AND CLOSING PIECE

- (1) A flanged stub pipe and a welded closing piece shall be provided to connect the inlet valve to the terminal point of the penstock. The closing piece shall be compatible for welding to the penstock and shall be designed in accordance with the criteria used for designing the spiral case. For inspection and maintenance of the inlet valve, the penstock will be closed with a blind flange and the operation of the other unit can resume after a short interruption.
- (2) The closing piece shall include 150-200 mm trimming allowance and shall incorporate connections for all equipment required to be connected to the pipeline under the Contract. The Contractor shall be responsible for trimming and fitting the closing piece and also for the making of the welded joints between the pipeline and the closing piece. These welds shall be subject to a 100 percent radiographic inspection.
- (3) A flanged dismantling joint shall be provided between the spiral case and inlet valve. The dismantling joint shall be complete with nuts, bolts and jointing suitable for attaching to the inlet valve and spiral casing, the dismantling joint shall permit installation and removal of the inlet valve. The design shall be such that no forces are transmitted via the pipe to the turbine.

S3.06 PRESSURE CONDUIT AND TURBINE DRAIN SYSTEMS

- (1) A 100 mm diameter manually operated gate valve and connecting pipes shall be provided with each turbine for draining water from penstock upstream to the draft tube. The conduit connection to penstock tapings shall be located upstream of the inlet valve in the stub pipe or closing piece. The embedded pipework provided by the civil works contractor shall be as shown on the Drawing.
- (2) A 50 mm maximum diameter system of valve and piping shall be provided to drain water from the spiral case to the tailrace. The valve, piping and supports shall be suitable for operation under maximum unbalanced head and free discharge without appreciable vibration.
- (3) The Bidder shall submit the layout arrangement of Turbine, Inlet Valve, Bypass Valve and pipe arrangement shall be submitted with the Bid.

SECTION 4

***TESTS FOR TURBINE, GOVERNOR INLET VALVE
AND AUXILIARIES, TURBINE MODEL TEST,
TURBINE FIELD EFFICIENCY TEST***

SECTION 4 - TESTS FOR TURBINE, GOVERNOR INLET VALVE AND AUXILIARIES, TURBINE MODEL TEST, TURBINE FIELD EFFICIENCY TEST

S4.01 TESTS FOR TURBINE, GOVERNOR, INLET VALVE AND AUXILIARIES

(1) Tests During Manufacture

Turbines, governors, inlet valves and auxiliaries shall be subject to the following tests at the Contractor's premises.

(a) Material Tests

- (i) Material tests on all important stressed components as defined in Clause S1.17 (2).
- (ii) Radiographic examination or ultrasonic examination of all major castings and forgings. The areas proposed for such examination shall be nominated by the Contractor when he submits drawings of the components concerned in accordance with Clause 4.06 of Volume 1 and shall be subject to the approval of the Engineer. The decision as to whether further examination is required shall be determined on the incidence of defective materials disclosed by the initial examination. The acceptability of the material shall be judged in accordance with American Society for Testing Materials, cracks and hot tears being 'unacceptable', severity level 2 for all other forms of defect being 'borderline', as defined in those Standards. Any areas found by these examinations to contain unacceptable defects shall be subject to re-examination after repair.
- (iii) Radiographic, ultrasonic examination and crack detection of welded components in accordance with Clause S1.17
- (iv) Crack detection of all castings and forgings.

(b) Hydrostatic Tests

- (i) On all equipment subjected to water, oil or air pressure during normal or abnormal working conditions, in accordance with the relevant American Standards, subject to the test pressure being not less than 1.5 times the maximum working pressure but in no case less than 7 kg/cm².
- (ii) Leakage and deflection tests on all equipment stressed by pipeline pressure.
- (iii) Leakage tests with kerosene under gravity for all sump tanks.

(2) Tests on Unit Auxiliaries

- (i) Motors for unit auxiliaries shall be subjected to type and routine tests.
- (ii) All motor-driven auxiliary machines shall be run as complete units and tested for starting current, running current, power factor, bearing performance, gland tightness, noise and vibration.
- (iii) One auxiliary machine of each type for connection to the unit auxiliary system shall be tested to demonstrate satisfactory operation over the range of voltage and frequency which may occur in service including full-load rejection of the generator.

(c) Tests on Governors

Governor shall be subjected to test specified in IEC publication 308 for the governor.

(3) Tests at Site

(a) Preliminary Tests

The preliminary tests for the turbines, governors, inlet valves and ancillaries shall include the following:

- (i) Radiographic or ultrasonic examination of all site welds as defined in Clause S1.18.
- (ii) Hydrostatic pressure tests on all pressure pipe systems. (The test pressures shall be respectively the same as specified in Clause S4.01 (1) (b) for the tests during manufacture).
- (iii) Insulation and continuity tests on wiring including tests for correctness of connection.
- (iv) Checking for correct operation of each control, protection and indication device.

(b) Tests on Completion

For the turbines, governors, inlet valves and ancillaries, the Tests on Completion shall include the following:

- (i) Tests for correct operation, control, indication and protection of all ancillary systems required to be in service for the operation of the turbine/generator units including:
 - Inlet valve
 - Governor pumping set and compressed air system (if required); and turbine regulating gear and governor.

- (ii) Rotational tests of the turbine connected to the generator including alignment checks, and measurement of hydraulic thrust at overspeed as well as normal speed, prior to connection to the electrical network.
- (iii) Loading and load rejection tests over the full range of permissible turbine gate openings and heads.
- (iv) Speed, pressure and frequency regulation tests.
- (v) Check of pressure and output fluctuations.
- (vi) Tests of correct functioning of controls, protection and indicating equipment. These shall be conducted over the widest practicable range of conditions available.
- (vii) A test to prove that the turbines will deliver the guaranteed continuous rated output as specified in Clause S2.02 (2). For the purpose of this test the generator losses shall be determined from the results of the tests during manufacture and the net head on the turbine shall be determined by measurement.
- (viii) A test to prove that the turbines will achieve the guaranteed efficiency as specified in Clause S2.02 (2) Service performance test.

(c) Test Codes and Tolerances

(i) Test Codes

The Tests on Completion described in Clause S4.01 (2) (b) subparagraphs (iii), (iv) and (vii) shall be conducted and the results calculated generally in accordance with the relevant sections of the 'International Code for the Field Acceptance Tests of Hydraulic Turbines' IEC Publication 41 in so far as this code is consistent with this Specification and the conditions at Site, except that the tolerance shall be as stated in subparagraph (ii) of this paragraph.

(ii) Tolerances

To allow for inaccuracies of measurement, the following tolerances shall be applied to performance figures ascertained from Tests on Completion.

- Momentary speed rise - $N \pm 2.0$ percent absolute.
- Maximum pipeline pressure - $N \pm 2.0$ percent of the ascertained figure.
- Power output - $N \pm 0.5$ percent of the ascertained figure.
- Inaccuracy of efficiency for field test of turbines shall not exceed ± 1.5 percent.

The Contractor shall be deemed to have made provision in his guarantees for all other tolerances and contingencies including those arising from design and manufacture.

S4.02 TURBINE FIELD EFFICIENCY TEST

Field testing to verify the turbine and generator efficiencies and outputs shall be done by the Contractor after completion of all installation works. The test procedures, instrument used and date for the test shall be submitted to DEDE for approval.

Tests shall be carried out in accordance with the provisions set forth in “International Code for the field Acceptance Test of Hydraulic Turbines” (IEC Publication 41) and the method, diagram and the instruments used for the test shall be submitted with the Bid.

The Bidder shall indicate in his Bid at least two methods for measuring flow and shall submit drawings with located indication including necessary provisions for the penstock.

Failure to provide information may subject to the rejection of Bidder’s Proposal.

All instrument and cost required for performing the test shall be at the Contractor’s expenses. Testing instrument shall be calibrated by an independent institute/organization and it shall be submitted to DEDE for approval.

Should the result of the test show that the efficiency or the output is lower than the corresponding guaranteed value, all the liquidated damage costs relevant to the test shall be deducted from the Total Contract Price.

SECTION 5
MECHANICAL AUXILIARY EQUIPMENT

SECTION 5 - MECHANICAL AUXILIARY EQUIPMENT

S5.01 UNIT COOLING WATER SYSTEM

(1) General Description

(a) The Contractor shall provide one unit a separate cooling water system for supply to, and where necessary, the generating equipment of this plant during the unit is operating. The cooling water shall be close loop system in which the cooling water flow in the close system and exchange heat via plate heat exchanger for release heat to the tail water. The envisaged schematic arrangement of the unit cooling water system is shown on the Drawing. The details shown on the Drawing shall be taken as the minimum requirement. The items of Plant to be supplied by the unit cooling water system shall be for:

- (i) bearing lubricating oil system
 - (ii) turbine shaft sealing
 - (iii) Governor oil coolers (if required); and
 - (iv) Any other unit auxiliary requires a supply of cooling water while that unit is operating
 - (v) general use
- (b) The Contractor shall design and specify the flow requirements, size of piping required and the operating head of the system.
- (c) Bidder shall submit the cooling water system diagram showing valves, strainers, and instrument and pipe size with the Bid.

(2) Arrangement of Equipment

- (a) The system shall include duplicate automatic and manually operated self-cleaning type filter (or) strainers drawing water from the penstock, and supplied for the two units and other services as required.
- (b) A stainless steel orifice for flow distribution adjustment, and a flow relay for flow indication and flow failure alarm, shall be provided. The system shall be complete with automatic motor driven back-washing strainers (or) filters, all pipes, valves, pressure gauges, flow control valves, air releases and drains.

(3) Type and Construction of Equipment

(a) A.C. Motor Driven

A.C. motor driven isolating valve shall be controlled during turbine start and stop sequences.

(b) Strainers (or) Filters (if applicable)

- (i) The strainers (or) Filters shall be of the automatic and manually operated self-cleaning type, with mesh openings of not more than 3 mm and in any case small enough to exclude any foreign matter large enough to cause damage (or) blocking in any part of the system.
- (ii) Any discharge from the strainers (or) Filters resulting from a backwash of flushing cycle shall be piped to drain. The mesh shall be of corrosion resistant material and the strainer bodies and covers shall be galvanized internally and externally.
- (iii) The strainers (or) Filters shall each have an automatic air release valve with discharge piped to drain. The head across the strainer when 30 percent blocked shall not exceed 1.5 meter of water.

(c) Portable Chemical Feeder (not applicable)

- (i) Cooling water conditions may produce bacterial growth in the water passages of the various heat exchange systems.
- (ii) A portable chemical feeder shall be provided to enable periodic injection of suitable concentration of hydro-chloric acid or sodium hypochlorite into each unit cooling water system in order to control the bacterial growth. It is expected that approximately ten parts per million residual chlorine will be required in the cooling water systems, however the chemical feeder shall provide for a range of feed rates which shall be fully adjustable.
- (iii) The chemical feeder shall consist of a tank, pump, filter, check valve, pipes, swivel type injection connections for pipe coupling and other necessary instruments and shall be provided with a control panel, electrical cord and plug. The pump shall be of the positive displacement type driven by an electric motor. Two (2) flexible tubes shall be provided to connect the chemical feeder to the injection point in the cooling water system. The chemical feed unit and tank shall be mounted on a four wheel hand truck with pull bar and lifting eyes at each corner. The equipment shall be neatly arranged and provision shall be made for storing flexible tubes and electrical cord.

- (iv) The chemical injection points for each unit cooling water system shall be located upstream of the Unit cooling water system and accessible from the machine hall floor level.
- (d) All piping for unit cooling water system shall be of seamless steel pipes with bolted flange connection.

S5.02 COMPRESSED AIR SYSTEM (if necessary)

(1) General Description

- (a) The common compressed air system will be used to supply operation air to the following equipment:
 - (i) Turbine governor pumping set oil/air pressure receivers
 - (ii) Maintenance service points at erection bay and machine bays and generator brakes.
- (b) The Contractor shall determine the capacity of compressor, primary chamber and air receiver, the normal operating pressure and pipe size so that the charging of a governor pressure receiver from atmospheric to working pressure can be achieved in 0.5 hours.

(2) Arrangement of Equipment

The system shall comprise two motorized air cooled compressors for normal and standby duty respectively. The duties shall be interchangeable while in service. Each compressor shall be included a silencer, intake, filter, governor type drainage valve, primary chamber, after-cooler, non-return valve and isolating valve delivering into the air receiver. The compressor shall be controlled by air pressure in the high pressure air receiver, connection of high and low pressure air receiver shall be made by pressure reducing valve and solenoid valve which shall be controlled by the air pressure of low pressure air receiver.

The compressors shall be arranged to operate by automatic and manual control. The system shall be complete with all pipes, fittings and connections, manual valves, temperature and pressure gauges.

(3) Compressors

- (a) The compressors shall be continuously rated and of a reciprocating, air cooled pattern.

- (b) All working parts shall be replaceable.
 - (c) The compressors shall be provided with after-cooler and, where necessary inter-coolers. They shall be air cooled and the tube nests shall be replaceable. The tubes shall be of corrosion resistant material. Each cooler shall be complete with moisture separator and automatic trap fitted with sight glass assembly.
 - (d) Main bearings, and for reciprocating compressors, connecting rod and crosshead bearings shall be oil pressure lubricated by a pump mechanically driven from the compressor. Where separate cylinder or rotor lubrication is provided, the oil pump shall be mechanically driven from the compressor.
 - (e) The pressure oil system shall include a suction strainer, sump level indicator and full flow strainer of either the replaceable cartridge or cleanable edge filtration type.
 - (f) Crankcases shall be enclosed when the compressor is operating. Cooling jackets, air cowlings and crankcases shall have adequate access for cleaning and inspection.
 - (g) Intake shall be provided with suction silences and an air cleaner of either the oil bath or replaceable cartridge type.
 - (h) Compressors shall be fitted with protective devices to stop the compressor in the event of low oil pressure or high air delivery temperature.
 - (i) Compressors shall be fitted with starting unloaders such that the unit reaches full speed before air delivery commences.
 - (j) Motors and compressors shall be rigidly mounted on a common base plate to maintain correct alignment. All moving parts shall be enclosed. The base plate shall minimize the transmission of vibration to the foundation.
- (4) Air Receivers and Air/Oil Receivers
- (a) Compressed air receivers and air/oil receivers shall be designed and constructed in accordance with ASME Standard.
 - (b) The receivers shall be fitted with safety valves, pressure gauges and automatic and manual condensate drains.
 - (c) The Contractor shall provide detailed shop drawings and calculations for the design of the receivers sufficient for the DEDE Engineer to check compliance with ASME requirements.

S5.03 VENTILATION AND AIR-CONDITIONING SYSTEMS

(1) General

- (a) The Contractor shall design, supply and install the ventilation and air-conditioning systems in the power station. The system shall comprise:
 - (i) Three air-conditioning split type ceiling mounting, each for the Control Room, 24,000 BTU-HR Sealed Energy Save No.5.
 - (ii) Three air conditioning, spit type for office 24,000 BTU-HR Sealed Energy Saving No.5.
 - (iii) Individual ventilation systems for the following rooms:
 - Toilets - window mounted exhaust fan
 - Diesel Room - exhaust fan
 - Battery Room - exhaust fans
 - Control Room - supply/exhaust fans
 - Office Room - supply/exhaust fans
 - Switchgear Room - exhaust fan
- (b) Each system shall include control and indicating instruments and all electrical wiring.

S5.04 POWERHOUSE WATER DRAINAGE SYSTEM

(1) General Description

- (a) The station drainage pumping system shall consist of two sump pumps and motors each of 4 L/s capacity when operating in the drainage pit. Schematic arrangement of pumps and pipework is shown on Drawing.
- (b) The drainage pumps will be used to remove normal seepage, drainage water, and spiral casing drainage water which will be directed by gravity drains into the drainage pit. The pumps shall be supplied with quick release couplings such that a pump can be removed and used as a portable pump for drainage of a draft tube. The pumps will also be used to drain the inlet valve pits under emergency conditions such as a burst connection from a pressure conduit. The Contractor shall determine the size of piping required and the head against which the pump must operate to enable complete drainage of a turbine draft tube.
- (c) The drainage water may vary from the normal site 'clean' condition to a condition where it contains silt, small suspended material and contaminants such as lubricating oil, kerosene and grease in concentrations up to approximate 150 ppm.

- (2) Arrangement of Equipment : The system shall comprise two drainage pumps each with its own discharge piping, pressure gauge, check valve, and gate valve. The pumps shall operate under both manual and float switch control. The float switches shall be arranged to operate in accordance with levels. The duties of the two normal drainage pumps shall be interchangeable by manual controls.
- (3) Type and Construction
 - (a) The pumps shall be submersible, bottom suction, vertical shaft units with quick release coupling suitable for operating while submerged for indefinite periods and after being stationary for long periods. The design and construction of the motors shall prevent the entry of external water, foreign material or contaminants into the motors or their cooling systems under all conditions.
 - (b) The pumps shall be held with guide rail in the pit and can be remove by sliding up along the guide rail.
 - (c) The pumps shall be driven by 230 V, single-phase motors. Provision shall be made for replenishing the cooling lubricant if required.
 - (d) The float switches shall be suitable for submerged operation. They shall be mounted in a vertical steel pipe which shall be located in the drainage pit. Off takes from the sump to the float switch pipe shall be equipped with mesh strainers. The float switch pipe complete with float switches shall be arranged so that it may be easily removed from the drainage pit.
- (4) Piping and Fittings: The Contractor shall supply duplicate galvanized piping together with all steelwork and fittings for locating the pumps and float switch pipe within the drainage pit.

S5.05 PORTABLE FIRE EXTINGUISHERS

- (1) The Contractor shall supply portable fire extinguishers complying with accepted standards. Each extinguisher shall be mounted on suitable bracket on the wall at location to be advised by the DEDE Engineer.
- (2) Extinguishers shall be red with a glossy baked enamel finish, chrome-plated trim and safety pin.
- (3) The following table lists the quantities of portable fire extinguishers required. For those type of extinguishers where it is possible to supply either a model which

can be refilled on site or a model which must be returned to a factory for refilling, the model which can be refilled on site shall be supplied, fully charged on complete with one (1) spare refill for each extinguisher.

TABLE S5.05-1
FIRE EXTINGUISHERS

Location	Minimum Capacity	CO ₂	Dry Chemical
Erection bay	6 kg	1	1
Control room	6 kg	2	1
Office area	6 kg	1	-
Diesel room	6 kg	1	1
Machine bay	6 kg	2	1
Battery room	6 kg	1	-
Store room	6 kg	1	1
Switchgear room	6 kg	1	1

S5.06 OVERHEAD TRAVELING CRANE

(1) Type and Rating

- (e) The Contractor shall provide an electrically driven, pendant controlled, overhead traveling, and top running bridge type crane for the Powerhouse, together with a set of crane rails, longitudinal travel collector wires and associated equipment, four end buffers for the longitudinal travel and permanently fixed ladder and platform for routine maintenance.
- (f) The capacity of the crane shall not be less than 8 tons however the Contractor shall be supplied depending on the heaviest weight of equipment to be lifted during erection and maintenance of the turbines, inlet valves and generators.
- (g) The crane shall be design, constructed, erected and commissioned in accordance with CMAA or equivalent standards.
- (d) The height of lift of the crane and the limits of traverse and travel of the crane hook shall be determined by the Contractor and shall be sufficient for all erection and maintenance operations on the Plant in the Powerhouse Machine Bay.

- (e) The limits of lifting traverse and travel of the crane hook shall give the maximum possible coverage within the Powerhouse.
- (f) The crane will constitute a prominent feature of the Powerhouse and shall be designed to present an appearance aesthetically in keeping with this role and with the interior architecture of the Powerhouse.

(2) Operating Requirements

- (a) The crane shall have electrically driven hoisting (two speeds), traversing and traveling motions controlled by a low voltage push-button pendant. The pendant shall be movable horizontally along the crane bridge and located vertically for operation from the machine bay floor.
- (b) The operating speeds of the crane shall be within the following ranges:

Hoist	Normal	0.050 m/s
	Creep	0.005 m/s
Traverse	Normal	0.33 m/s
	Creep	0.08 m/s
Travel	Normal	0.60 m/s
	Creep	0.16 m/s
Minimum Height of Lift		5.00 m

(3) Crane Runway

- (a) General
The Contractor shall supply and install all sole plates and anchor bolts for the crane rails, longitudinal travel buffers and limit switch strikers.
- (b) Span
The span of the crane runway rails measured centre to centre shall be 8.0 m $\pm$ 2 mm.
- (c) Rails
The crane runway shall consist of jointed flat bottom rail and shall be installed to within $\pm$ 2 mm of level for its full length. Each section of each crane runway rail shall be interconnected and the rails shall be connected by grounding conductors to the Powerhouse grounding system.
- (d) Longitudinal Travel Buffers
Four longitudinal travel buffers complete with soleplates and holding down bolts shall be supplied and installed by the Contractor, one set for each end of the runway.

(e) Longitudinal Travel Limit Switch Strikers

Two longitudinal travel limit switch strikers shall be supplied and installed by the Contractor. These shall be positioned to provide a possible overrun of 150 mm when the limit switched trip.

(4) Construction Requirements

(a) Crane Structure

- (i) The crane shall be of fabricated steel construction. The bridge shall consist of one main girders connected together at each end by means of a substantial cross beam. The vertical deflection caused by the rated load plus the trolley shall not exceed $\text{length} / 1,000$ of span. Floor plate walkways and steel handrails shall be provided, and shall be suitable for routine maintenance of crane parts. The securing of the main girders to end carriages shall be by high tensile bolts and nuts to assure correct alignment and easy erection.
- (ii) The complete bridge structure shall be mounted on end carriages. Each end carriage shall contain wheels which rotate on antifriction bearings mounted on simply supported axles. The design of each end carriage shall be such that easy inspection and wheel removal is possible. In the event of a wheel shaft breaking it shall not be possible for the crane and carriage to drop more than 33 mm.
- (iii) Four travel buffers shall be attached to the outer bogies; one for each can stop at the end of each crane runway.

(b) Longitudinal Travel Mechanism

The longitudinal travel drive units shall be identical motorized geared units ensuring smooth operation of the longitudinal travel. The high precision gears of these units are run in the oil bath. Each drive unit shall be equipped with the electro mechanical brake operators according to the sliding rotor principle which shall be capable of being replaced without removing other components. The brakes shall be capable of being applied gradually to minimize swaying of the load and shall operate automatically when the supply to the motor is interrupted. The travel motor is designed as a drive unit for acceleration and safe deceleration of high-inertia load.

(c) Low Headroom Monorail Hoist

- (i) The hoist motor shall drive the hoist drum by central drive. The hoist drive shall be fitted with an automatic, spring applied, energized to release, brake. The hoisting drum shall be steel or cast iron and shall

have accurately machined grooving to accommodate the hoisting rope in single layers. The hoisting rope shall be performed, non-rotating construction.

- (ii) The hook of the crane fall block shall be of swiveling type, supported on a ball or roller thrust bearing. The fall block shall be provided with shrouded sheaves. The fall block sheaves, compensating sheaves, and reeling return sheaves shall have machined grooves and shall be mounted on ball or roller bearings.
- (iii) The motor torque is transmitted to the reduction gear through a flexible coupling to cushioning high starting torque peaks.

The minimum breaking strength of the rope shall be not less than five (5) times the hoist's rated load.

(d) General

- (i) All gearing other than final drives, shall be enclosed in gear cases. The gearboxes shall be fitted throughout with ball or roller bearings. Gearing shall be designed in accordance with the AGMA Class II with a minimum service factor of 1.25.
- (ii) All shafting to which gears, pinions and other similar parts are fitted, shall preferable be provided with a raised portion and/or shoulder where such parts are carried. Any change of section of shaft shall be effected with fillets of ample radius.
- (iii) All bearings and other wearing surfaces shall be provided with means for lubrication, preferably by automatic circulation. Points for lubrication by grease gun shall be suitable for the same make and grade of grease and shall each be provided with a separate grease nipple of the all steel, one piece button-head type. All grease nipples shall be readily accessible and grouped wherever possible. Removable; sheet steel guards shall be provided for open gearing.
- (iv) All gear boxes, motors, bearings, etc. shall be positively located after alignment, other than by their holding down bolts.
- (v) All platforms shall have 75 mm high kick strips at their edges.

(e) Electrical Equipment

- (i) All electrical equipment shall be suitable for operation from the 400 V, 50 Hz three-phase four-wire supply from the AC Station Service Distribution Board. The Contractor shall provide, on the crane, adequately rated single phase transformers, suitable for continuous operation for the supply of power to the control circuits, lighting and power outlet circuits and 'POWER ON' indicator light circuits.

- (ii) The electrical power supply to the crane shall be by means of three shrouded hard drawn copper collector wires supported by brackets, attached to the building above crane runway level. Red indicator lights shall be installed between phases at the end of the collector wires to show that collector wires are energized. The Contractor shall supply and install the collector wires, three collectors or renewable carbon head type, and all necessary and strainers, brackets, insulators, collector wire guards, and other fittings, together with a 'lock-off' type isolating switch and all wiring and conduit from this switch to the point of connection to the three longitudinal collection wires. The isolating switch shall be labeled 'CRANE ON/OFF'.
- (iii) All motors shall be half-hour rated for the required duty cycle.
- (iv) A control and protection panel enclosed in a cabinet, of dustproof, sheet metal construction, incorporating a hinged door and hinged panel, shall be mounted on the crane bridge. The equipment shall include an externally operated triple-pole main isolating switch, triple-pole main contactor, triple-pole ganged magnetic overload relays for each motor and all necessary fuses, control switches and wiring for the motors, control circuits, and one single-phase switched socket outlet. A 'POWER ON' indicating light shall be fitted to the cabinet.
- (v) A fall block operated, whole current over hoisting limit switch shall be provided for the hoist. In addition, a shunt type limit switch shall be fitted to the hoist to limit the travel in the 'raise' and 'lower' directions. Shunt type limit switches shall be provided also for the cross-traverse and longitudinal travel motions. All limit switches shall be self-resetting and shall be electrically connected in a manner permitting 'backing out' after tripping.
- (vi) The traverse power take off shall consist of an approved trailing cable system. An isolating switch shall be provided at the point of entry to the crab platform. This switch shall isolate the cross-traverse motion and shall be labeled "CROSS TRAVERSE-ON/OFF".
- (vii) All crane wiring shall be installed in screwed conduit.
- (viii) The control pendant shall preferable operate at 24 V but not more than 50 V. The push buttons shall return to the off position when pressure is released. The pendant shall include a power on/off switch. The buttons for each motion shall be grouped together and shall be logically identified. The electrical conductors to the pendant shall not be used to support its weight. The pendant shall incorporate a 'power on' indicating light.

S5.07 DIESEL-DRIVEN STANDBY ELECTRIC POWER SYSTEM

(1) Scope

The work to be done under this section includes the design, manufacture, supply, shop testing, delivery, and the installation, testing, initial operation and complete with auxiliaries, capable of fully automatic black start and loading.

The work to be finished by the Contractor shall include the following.

(a) Diesel Engine

- Diesel engine
- Governor
- Fuel oil system
- Lubricating oil system
- Cooling system
- Air intake system
- Exhaust system
- Engine starting system, including battery and automatic charger
- Engine protective devices and instruments and control panel

(b) Generator

- Generator
- Excitation system
- Generator protective devices
- Generator instruments, and control panel

(c) Steel Base for Unit Mounting

- Steel base
- Vibration dampeners
- Oil drip pan covering full length of base

(2) Application

In the event of a failure of the incoming power, the diesel engine driven generator set will automatically start and be used to provide standby electric power to assist in starting hydro-generating unit. The ambient air has H₂S present and equipment shall be designed accordingly.

(3) Requirements for Design

The rating of the generator, and thus the diesel, shall be suitable for the following duties.

- (a) The base continuous load that the diesel shall carry at all times will be the essential and emergency lighting, communication equipment, 2 battery chargers, cooling water system supply, 1 control building air conditioner and condenser unit, the town site water pump, guardhouse power supply and 1 station air compressor.
- (b) The diesel generator must be capable of starting the largest motor on the essential services distribution panel board with a base continuous load as specified in (a).

Preliminary sizing of the diesel generator indicates that 100 kVA at 0.8 PF is required. Final rating selection shall be made by the Contractor based on detailed load calculations.

The unit shall be capable of starting and loading automatically, as required, and of supplying an isolated load. Final design and rating shall be approved by DEDE.

(4) Diesel Engine and Auxiliaries

(a) Diesel Engine

The diesel engine shall be capable of operating on normal diesel fuel and shall not require premium diesel fuel for satisfactory performance. The engine shall be rated to produce required output at 45°C ambient temperature and 99 percent relative humidity.

The diesel engine may be either normally aspirated or supercharged.

The engine and generator shall be supplied complete with a common bedplate suitable for mounting on a concrete foundation. Adjustable steel spring type vibration isolators with sound pads shall be provided for mounting between the unit base and concrete foundation. A suitable oil drip pan shall be provided under the full length of the diesel and generator to catch oil leakage.

(b) Governor

The engine shall be equipped with a suitable governor for 50 Hz operation.

The engine shall have a separate overspeed trip device to stop the engine in the event of the engine exceeding its safe speed.

(c) Fuel Oil System

This system shall include for one 120 L, standard indoor fuel tank complete with fill-connecting piping, vent pipe, level indicator, low-level alarm, cradles and supporting structure, mounted for gravity feed to the engine pump. The system shall be complete with all interconnecting fuel oil piping and flexible connections. One hand-operated fuel pump shall be provided for pumping fuel from barrels to fuel tank.

(d) Cooling System

The cooling system shall be air cooled or oil cooled with shaft driven air fan.

(e) Air Intake System

This system shall include an engine air cleaner, complete with support structure, intake piping, flexible connections and piping supports as required. The filter elements of the air cleaner shall be of a washable type. A differential pressure indicator shall be provided across the filter to indicate when the filter elements require cleaning.

(f) Exhaust System

This system shall include a muffler, complete with support structure, exhaust piping, flexible connections, pipe supports, and insulation for exhausting from building. The muffler is to be located inside the building. The exhaust system inside the building shall be suitably insulated over its entire length. Noise is a critical factor and the Contractor shall include the best muffler system available.

(g) Starting System

This system shall include a heavy-duty starting motor, regulator, batteries of ample capacity, battery rack, jumpers, cables and 2-rate automatic battery charger.

(h) Protective Devices

The engine shall be provided with all necessary protective devices, safety features and controls which shall include, but not be limited to:

- Low oil pressure cutout
- Automatic over speed shutdown
- Over crank shutdown

(i) Control Panel

The engine control panel shall be mounted on the unit and shall include, but not be limited to, the following instruments and controls.

- Complete engine automatic starting controls, including a test switch
- Safety devices
- lubricating oil pressure gauge
- lubricating oil temperature gauge
- Tachometer/hour-meter
- Start-stop automatic switch
- Automatic-manual control selector switch
- Cranking limiter
- Individual signal lights, manual resets, and common alarm terminal.

Remote alarm Annunciator shall be provided in the control room.

(j) Special Tools

The Contractor shall supply one set of any special tools necessary for the complete servicing and maintenance of the engine and all auxiliaries. The Contractor shall provide one barrel hand pump with all hoses, connectors and fittings to fill the storage tank from standard fuel oil barrels.

(5) Generator and Exciter

(a) Generator and Exciter

The generator shall have a continuous rating of 100 kVA, 0.8 PF, 400/230V, 3-phase, 4-wire, 50 Hz, and shall be capable of operating at 110 percent load at rated power factor and frequency for a minimum of 1 hour.

The unit shall be suitable for operation in a tropical climate, as stated in previous sections of the Specifications.

The generator shall be equipped with a direct coupled, brushless or static exciter, designed and rated to match the generator characteristics.

(b) Construction

The generator and exciter shall be air-cooled, self-fan, ventilated type, in a drip-proof enclosure.

Winding insulation shall be Class F.

The generator shall be provided with a full amortisseur winding.

(c) Voltage Regulator

A solid-state voltage regulator shall be supplied, capable of maintaining the output voltage within 1 percent of the rated voltage over the full operating range of the generator. Provision shall be made for manual adjustment of the regulated output voltage from 10 percent below to 10 percent above the nominal rated voltage.

(6) Generator Control Panel

A totally enclosed sheet steel control panel with front hinged access door shall be supplied to house the following generator control equipment:

- AC voltmeter and ammeter with selector switch
- Automatic voltage regulator
- Frequency meter (48 to 52 Hz)
- Protection relays
- Battery, Charger with charging ammeter and voltmeter
- Automatic control and timing relays as required performing the functions of start/ stop diesel generator, closing generator breaker (located in AC station switchgear) when generator is up to normal frequency and voltage

The starting and stopping functions shall be controlled through separate timing relays to permit adjustable delay in starting and stopping over a range of 0.1 seconds to 10 minutes by both Locally or HMI PLC.

(7) Equipment Bases

The Contractor shall supply and install all equipment concrete bases. Final setting on bases shall be cement grout. The Contractor shall provide connecting bolts, gaskets, leveling shims and washers, and shall supply the anti-vibration mounts for the diesel-generator unit and auxiliaries.

Each piece of equipment shall be installed strictly in accordance with the manufacturer's instructions. The complete initial lubrication of all equipment, including all gear cases, sump, and other oils shall be provided by the Contractor.

All equipment shall be factory painted in keeping with the requirement of Clause S1.12.

<i>SECTION 6</i> <i>TESTS FOR MECHANICAL AUXILIARY EQUIPMENT</i>
--

SECTION 6 - TESTS FOR MECHANICAL AUXILIARY EQUIPMENT

S6.01 TEST DURING MANUFACTURE

(Except powerhouse crane)

The mechanical auxiliary equipment shall be subject to the following tests at the Contractor's premises.

(1) Material Tests

Material tests shall conform to the requirements of Clause S4.01 (1) (a).

(2) Hydrostatic Tests

Hydrostatic tests shall conform to the requirements of Clause S4.01 (1) (b).

(3) Performance Tests

(a) Operating tests on all electric motors under conditions simulating the actual service for output, efficiency, power factor, temperature rise including oscillograms of starting and running current voltage.

(b) Hydraulic, pneumatic and electric tests on all pumps, compressors, air-conditioning units and fans under conditions simulating the actual service to demonstrate that the performance complies with the Contract and to establish complete operating characteristics. Particular attention shall be paid to limiting noise and vibration levels.

(c) Performance tests on the air-conditioning units.

S6.02 TESTS AT SITE

(Except powerhouse crane)

(1) Preliminary Test

The preliminary tests for the mechanical auxiliary equipment shall include the followings:

(a) Hydrostatic pressure tests on all piping systems. The test pressures shall be respectively the same as specified in Clause S4.01 (1) (b).

- (b) Insulation and continuity tests on wiring including tests for correctness of connection.
- (c) Checking pipe work for freedom from obstructions.
- (d) Checking for correct operation of each control, protection and indication device.
- (e) Checking the operation of all pump and compressor assemblies for vibration, overheating, leakage from joints, seals, glands, etc.

(2) Tests on Completion

For the mechanical auxiliary equipment, the Tests on completion shall include the followings:

- (a) Tests of the correct functioning of automatic and manual control and protection equipment. These shall include a demonstration of correct repetition of twenty consecutive operating cycles.
- (b) Tests to verify that the operation and system performance of all pumps and compressors are in accordance with the Contract.
- (c) Tests to verify the performance of the ventilation and air-conditioning plant shall include:
 - The continuous operation of all equipment for at least 50 hours to demonstrate that it will operate without overheating.
 - The measurement of air quantities flowing in each ventilated or air-conditioned room.
 - The measurement of temperatures and humidity in each air-conditioned room at regular intervals during a test period of 50 hours. These tests shall if practicable be carried out on days when outside air conditions are close to design extremes. The outside air conditions shall be measured during the tests.
- (d) The measurement of noise levels during the running of the plant at maximum load.
- (e) Tests to verify that the operation and performance of other mechanical auxiliary equipment is in accordance with the Contract.

S6.03 TESTS DURING MANUFACTURE FOR POWERHOUSE CRANE

The power station crane shall be subject to the following tests at the Contractor's premises.

(1) Material Tests

Material Tests shall be as specified in Clause S4.01 (1) (a).

(2) Tests on Assembled Crane

All parts of the crane shall be fully assembled, wired and tested for correct operation at the Contractor's premises. For these tests the hoist ropes need not be fitted to the drums.

S6.04 TESTS AT SITE FOR POWERHOUSE CRANE

(1) Preliminary Tests

The preliminary tests on the powerhouse crane shall be carried out as soon as erection is complete and shall include the checking of connections and testing for correct operation of all equipment.

(2) Tests on Completion

The following tests shall be carried out regardless of any tests which may have been carried out at the Contractor's premises

- (a) Tests of the response to all controls, without load.
- (b) Tests of the operation of the hoist, travel and traverse limits, without load.
- (c) Tests of operation of the brakes on the hoist when loaded to 25 percent in excess of the rated load.
- (d) Measurement of the maximum deflections of the main beams of the crane under rated load and the overload conditions specified above.
- (e) Recording the travel and traverse speeds under the overload conditions specified above.
- (f) Measurement of the hook height from the assembly bay floor and total height of lift without load.
- (g) Measurement of the hook approaches to the walls without load, and the overrun remaining when the limits have tripped and the brake has applied.

- (h) Measurement of the hoisting and lowering speeds without load and with rated load.
- (i) Measurement of longitudinal travel and traverse speeds without load and with rated load.

SECTION 7
GENERATORS AND AUXILIARIES

SECTION 7 - GENERATORS AND AUXILIARIES

S7.01 GENERATORS

(1) Scope of Work

The work to be done under this section consists of the design, manufacture, supply, delivery to site, installation, commissioning and guarantee of two synchronous generators, unit output capacity of not less than 808 kVA at 0.8 for 50 Hz operation, as specified herein.

(2) Purpose and Function

Each generator supplied in this contract shall have single driven shaft and having enough extended length to mount Kaplan turbine runner with integrated flywheel inside generator housing and the units shall generate 3-phase, 50 Hz electric power of 3,300Vac at generator terminals, which will be stepped up to 22 kV, for incorporation into existing 22kV PEA Grid.

(3) Responsibility of the Bidder

The Bidder shall guarantee and be responsible for the hydroelectric generator supplied under this project.

- The output and efficiency, of the generator and temperature rises of the various parts as specified under this section.
- Generator bearing housings for both DE and NDE sides shall be sleeve bearing type and fixed at the generator casing together with external lubricating oil supply for both bearings so that separate generator enclosure and bearing housing design is not acceptable.
- The Bidder shall submit with the Bid for the generator constructional layout drawings from Generator Manufacturer showing extended shaft size and length, flywheel, terminal box, bearing housing showing the actual dimensions of equipment to be located in turbine floor to evaluate that the proposed equipment dimensions can be installed the given dimensions of powerhouse in the Bid.
- In addition, Bidder shall submit the proposed flywheel dimension, size and GD^2 values to absorb momentary load at 10% of rated output so that the calculation of GD^2 and maximum allowable frequency variation values shall be attached with the Bid.
- The flywheel shall be installed at DE side of generator and the bearing sizing calculation to suit with such load shall be attached with the Bid.

- Furthermore, equipment loads and dynamic forces which are necessary for Civil Work Contractor to design the foundation of equipment.
- To indicate the strength and forces of all extended parts to withstand all mechanical and electrical forces and other related forces which may be experienced in normal operation and emergency shutdown conditions as well as those caused by terminal and field short circuits, over speed conditions and any fault conditions.

Failure to comply the above specifications and failure to provide the above evidence with the Bid shall subject to rejection of Bid Proposal.

(4) Standards and Codes

The work covered by these Specifications shall be designed, manufactured and tested generally in accordance with the following standards and codes or approved equivalent.

- | | |
|--|---------------------------|
| - National Electrical Code | ANSI C2 |
| - Rotating Electrical Machines | IEC 60034-1 |
| - AC generators | ANSI C50.10, C50.12 |
| - Standard Criteria and Definitions of Excitation Systems for Synchronous Machines | IEEE STD 421 |
| - Shaft | ANSI B49.1 |
| - Motors and Generators | NEMA MG 1 |
| - Control Cubicles | NEMA SG 5 |
| - Instrument Transformers | ANSI C57.13, NEMA EI 2 |
| - Relays | ANSI C37.90 |
| - Indicating instruments | ANSI C39.1 |
| - Wire | Metric standard |
| - Screw threads | Metric standard |
| - Transformers | ANSI C57 |
| - Definition of electrical items | ANSI C42 |
| - Test Code for Synchronous Machines | IEEE No. 115 |
| - Standard methods for determining losses efficiency from tests | IEC60034-2 and IEC60034-4 |
| - Electrical Insulation | IEC 60085 and IEEE43 |

Where reference is made to any of the above standards and codes, the issue current at the time of design shall apply.

(5) Description

The units shall be of vertical mounting, extended shaft, revolving field, Kaplan turbine driven, synchronous brushless generator and shall conform to the latest standards of ANSI and IEC unless otherwise specified herein.

The units shall be equipped brushless type digital AVR excitation system of adequate capacity to meet all generation requirements for both Dummy Load and Parallel with 22kV PEA Grid.

(6) Capacity and Efficiency

The units shall have a minimum continuous rated output of not less than 808 kVA electrical output at generator terminals at power factor of 0.8 percent. The maximum temperature rise of both stator and rotor windings at rated output and normal conditions shall be based on an ambient air temperature not exceeding 40°C in accordance with ANSI and IEC standards.

The unit shall be capable of operation over the following capacities and efficiency for which the values shall be based on insulation class H and temperature rise class B for both stator and rotor windings or better.

- Generator electrical output 808 kVA at rated speed 600 rpm and voltage variation ± 5 percent and power factor range from 0.8 to 1.0 p.u. for 50Hz system operation with a 40°C ambient temperature.
- Guaranteed efficiency values shall not be less than 95 % at full load of 0.8 power factor and 96 % at full load of 1.0 power factor.
- Bidder shall submit efficiency curves and capability curves from generator manufacturer together with the Bid.

(7) Speed, Direction of Rotation and Frequency

The continuous rated speed of the unit shall be 600 rpm, which is the same speed with turbine design for 50Hz operation and shall be capable of operating continuously at a runaway speed of 1800 rpm higher than turbine runaway speed.

The direction of rotation shall be counterclockwise when viewed from Turbine side.

The turbine and generator layout arrangement showing capacity and rating including voltage, speed and direction of rotation shall be submitted with the Bid.

(8) Voltage and Phases

The unit shall be designed at its rated capacity at a balanced 3phase potential 3,300Volt between phases. The tests and guarantees shall also be based on this voltage and for 50 Hz operation. The unit shall operate successfully at rated capacity at 5 percent above or below rated voltage.

(9) Insulation

The generator stator windings and all connections, main and neutral leads, etc., shall be insulated in accordance with ANSI and IEC standards and both stator and rotor coils shall be treated with VPI (Vacuum Pressure impregnation) having temperature rise Class B and Class H insulation. The same insulation class and temperature rise class shall be applicable for both windings.

Bidder proposed generator manufacturer shall have his own facilities for VPI (Vacuum Pressure impregnation) Process inhouse and the evidence of this above requirements shall be attached with the Bid.

Bidder shall submit and attach the evidence of the above requirements with the Bid presenting the proposed manufacturer's own catalogues.

Failure to submit this evidence shall subject to rejection of the Bid.

(10) Harmonic Distortion, Wave Form and Telephone Interference Factor

The total harmonic distortion shall be not more than 5% to design according to IEEE or IEC 61000 standards.

The potential wave form of the generator open-circuit terminal voltage shall not deviate from a sine wave more than 10 percent in accordance with ANSI or IEC standards.

The telephone interference factor shall be within the limits specified in ANSI or IEC standards.

(11) Flywheel Effect

The flywheel effect (WR^2) of the rotating parts of the turbine runner, generator rotor and flywheel shall be allowable to absorb the instantaneous transient load of 10% and the values shall be calculated and attach with Bid together to prove that the proposed generator frame size, flywheel size and weight are suitable to operate the Unit with dummy load and parallel with grid so that the Bidder shall submit the allowable maximum GD^2 values with or without Kaplan runner.

Failure to submit this evidence shall subject to rejection of the Bid.

(12) Soleplates

The Contractor shall design and provide force and moment values for turbine casing to use as baseplate for mounting the generator upward and it shall be designed to mount the generator frame with built in flywheel without any defect during operation. The turbine casing shall be act like base plate or soleplate for generator housing so that the grouting in an embedment as required and shall be arranged so that the turbine parts which lie in concrete can be embedded when the concrete is placed rather than grouted into block outs.

The Contractor shall be responsible for ensuring that the soleplates are placed at the correct position and approval by the Department. Means for adjustment shall be above the concrete surface.

(13) Stator

- (a) Stator Frame and Iron: The design of the stator frame, the soleplates and the means of attachment of the soleplates to the frame shall be suitable to withstand all stresses to which they may be subjected in service as a result of all types of short circuits or faults.

Cast finger supports for the laminations will not be accepted.

To minimize the effects of end-iron heating during operation, adequate ventilation shall be provided, and nonmagnetic materials shall be employed where necessary.

The stator core assembly shall be constructed from low-loss cold-rolled silicon steel sheets and shall be varnished to limit losses by Eddy current, cut into full sheets or sections, and stacked around a central mandrel. Radial ventilation ducts obtained by welding air vents shall be provided and distributed along the stator core.

- (b) Stator Winding: The stator winding shall be made from pre-insulated flattened copper conductors and the sections made up of the desired number of turns, it shall be insulated under several layers of micaceous tape (MICA Tape), and before being formed to the desired shape and the conductor strands shall be transposed to minimize stray losses. Facilities shall be provided for terminating the cable on the unit housing. Final details of the main lead termination at the unit shall be subject to approval by the DEDE Engineer. All bolted main current-carrying terminals shall be silver or tin plated.

The stator coils shall be inserted into the stator slots in a winding procedure referred to as semi-overlapping by using Insulation Sheets or Nomex paper (slot channels and insulation between coils) and the jamming of the windings by wedges (intermediate and end wedges) combined with the strengthening of the resistance of the coil heads with fiber glass cords to prevent damage to the windings.

The fully wound stator shall be applied for a vacuum pressure impregnation process (VPI process) and it shall be heated in an oven to remove any residual humidity then placed in tank by removing the air to create the vacuum media to enable the impregnating with resin. After a certain period, pressurized dry air shall be applied into the tank. Applying exerting sufficient pressure to allow the resin fill all holes that may remain in the insulation.

The generator star neutral point shall be brought out and connected to the generator neutral resistance cubicle via MV cables. The location of the neutral resistor cubicle shall be installed nearby synchronous generator.

The stator winding shall be capable of withstanding dielectric test in accordance with IEC or ANSI standards.

Adequate means shall be taken in the design and assembly of the stator winding to ensure the followings:

- The stator coils shall be adequately supported and braced to prevent dropping in the slots and to withstand the full stresses developed due to electrical fault conditions. Adjacent coil ends shall be held apart by spacers and bound to each other. Cording used to hold coils in position shall not be continuous (i.e. each coil shall be tied separately). The support rings to which the coils are lashed and supported shall be made of nonmagnetic material.
- The stator coils, when installed, shall fit firmly in the slots. A coil rejected because of slot fit shall not be used unless rebuilt.
- The stator coils shall be tightly wedged in the slots with wedges that will not buckle or shrink.
- The wedge in each slot shall be prevented from dropping out should it become loose in service.
- The stator coils, including spares, shall be manufactured to fit the stator core and end deformation will be the minimum necessary during installation.
- The insulation of the stator coils shall be sufficiently durable that, should it be necessary at any time to remove the coils, their removal and replacement may be carried out without damage to the insulation of any

of the other coils. The quality and life of the insulation shall be impaired in attaining the above requirements.

- The stator coil insulation, wedging, packing, bracing, and typing shall be such as to minimize the effect of thermal shock and of additional differential expansion which may occur as a result of the overload conditions.
- All possible measures shall be taken to maintain tight fit of coils in the slots to prevent vibration, loose wedges, and consequent high intensity discharge in the slots.

(c) Resistance Temperature Detectors

The Contractor shall supply 2 resistance temperature detectors per each phase, embedded in the various parts of the stator winding in accordance with IEC or ANSI standards.

The resistance temperature detectors shall be embedded in a suitable location, one at each end of the stator core for temperature measurement for the detection of end-iron heating.

The exact location of the resistance temperature detectors in the stator winding and core shall be subject to the approval of DEDE Engineer. All resistor temperature detectors in and around the generator shall be wired to a terminal box mounted on the outside of the generator air housing. This terminal box shall be separated from other terminal boxes.

All connections from the resistance temperature detectors to the terminal boards shall consist of twisted leads in shielded instrument cables.

The resistance temperature detectors shall have a resistance of 100 Ohms at 0°C over a temperature range of 0°C to 120°C.

All the resistance temperature detector RTD signals shall be connected to the AVR modules for monitoring and protection the Units.

(14) Rotor

The rotor shall consist of shaft, polar wheel, fan, balancing disc, excitation armature and rotating bridge rectifiers.

The rotor winding shall be insulated with Class H insulation as defined in IEC or ANSI standards, and shall be designed to withstand 10 times rated field voltage or standard voltage dielectric test to ground for 1 minute.

Each field coil shall be fabricated that the space between adjacent turns is completely and solidly filled with insulating material to ensure uniform insulation thickness between conductors throughout the coil. Every effort shall be made to avoid excessive deformation or burring of the conductor during forming of the coil.

The design of the rotor shall be such as to permit the easy removal and replacement of the field poles. If tapered keys are used to secure the field poles to the rotor rim, the drive key shall project above the rotor rim a sufficient distance to facilitate removal of this key by means of a key puller and to permit checking for tightness after overspeed tests have been performed.

The polar wheel, referred to as salient pole rotor, shall consist of a laminated assembly or massif design depending on overspeed calculation.

(15) Reactance and Capability Curves

The reactance values shall be provided and attached with the Bid as manufacturer's preliminary design values such as the values for synchronous, transient, sub-transient and negative sequence reactance under unsaturated and saturated conditions with short circuit ratio values, armature time constants and armature resistance.

The generator manufacturer's proposed frame model with the related performance curves such as Capability Curve, Short Circuit Curve, Efficiency Curve, and Transient Voltage Curve during load rejection, Stator Earth Fault Curve, shall also be submitted together with manufacturer's Drawings from factory having complete dimensions verifying such manufacturer is well proven and qualified manufacturer to produce the synchronous generator under European and American standards.

Failure to submit this evidence shall subject to rejection of the Bid.

(16) Generator Enclosure

The generator enclosure shall provide an open-circuit ventilation system. The enclosure shall be arranged to permit easy removal for the purpose of inspection and maintenance.

All bearing housing or bearing body shall attach with the generator enclosure so that the proper thickness of steel plate shall be applied to construction of generator enclosure.

No materials capable of supporting combustion shall be used within or in the construction of the generator enclosure.

Anti-condensation space heaters automatically controlled by thermostat shall be provided and the output 4-20mA signal shall send to Governor PLC Cubicle for monitoring and protection.

(17) Cooling System

The generator shall be self-ventilating with its own fan cooling action being utilized the force air through the windings, ducts, etc. Fan blades on the rotor shall be given special care in their design and to prevent un-necessary noise and vibration occur so the complete assembled rotor shaft with fan shall be rigidly installed and balancing in position at any speed.

The generator shall be of the opened air-cooled design. The generator cooling air shall be sucked from NDE end, after passing over the field, stator windings, and exhausted through side grill openings of generator enclosure.

(18) Braking System

The braking system shall be of the oil operated friction brake type. The pressure hydraulic oil shall be supplied from governor oil pressure unit and it shall be interlocked at Governor PLC program not to be applied at generator speed above 30% and/or when the turbine guide vanes are at opened position.

Each brake cylinder shall be provided with a limit switch, to operate when the brake is fully off. The limit switch shall be arranged to indicate that the brakes are ON, to prevent the machine from starting when any single brake is not fully OFF, and to initiate the protection function. Unit shutdown shall occur when brakes are applied out of sequence.

To minimize scoring of brake tracks, ample area of brake lining shall be provided and the type of lining supplied shall be matched to the hardness of the brake track surface (which shall be checked by measurement) according to the following parameters:-

Brake Track Hardness (Brinell)	Brake Lining (Ferodo type, or Equivalent)
Less than 150	CR
150 to 200	MR, MZ or L
Greater than 200	BA

The brakes shall be located and arranged to minimize the entry of brake dust into the generator coils.

S7.02 SHAFT AND BEARINGS

(1) General

- (a) The arrangement of shaft and bearings shall be of the form as specified as above in Clause S7.01 with sleeve bearing type having external lubrication oil supply system.
- (b) Bearing housing shall be directly fixed at Generator housing so that the extended generator shaft and bearing operating life shall be designed to bear the weight of turbine runner and reliability of generator lifetime.

The Bidder shall attach the generator analogy layout drawings showing the above requirements with the Bid.

Failure to comply this requirement will subject to rejection of the Bid.

- (c) The separate bearing housing from generator housing is not acceptable and it will be subjected to the rejection of the proposed Bid.
- (d) The Contractor shall carry out a detailed mathematical analysis of the rotating parts which are to be attached and construct together with generator shaft including additional flywheel and their related support systems to ensure stability and reinforcement, taking into account amplitudes and frequencies of transient axial and lateral thrusts and tensional vibrations together with instantaneous shock loads arising during dummy load (isolated load) operation. The Contractor shall consider the transient load during the operation and the calculations shall be submitted to the DEDE Engineer for approval.
- (e) The Contractor shall be responsible for determining and applying the method of shaft and bearing alignment and for determining alignment tolerances.
- (f) The Contractor shall provide a bending diagram for the turbine and generator shafts and the relevant information shall be incorporated in the Operation and Maintenance Instruction.
- (g) The shafts and all rotating parts shall be designed to withstand any torque which the associated turbine can produce under any possible combinations of head, gate opening and speed.

(2) Shaft and Couplings

- (a) The shaft shall be made with laminated steel and machined all over. A central hole shall be bored throughout the length of the shaft to allow assessment of the quality of the interior material by examination of the bore. A secure means shall be provided to prevent water from entering the shaft from the turbine end.
- (b) Shaft couplings or intermediate shaft shall not be applicable for the direct coupling of Kaplan runner to the generator shaft.

Failure to comply this requirement will subject to rejection of the Bid.

(3) Bearings

- (a) The bearings shall be sleeve bearing type for both DE and NDE suitable for all operating conditions for starting, stopping, normal and emergency shutdown operation at rated generator output, and operation at up to the maximum runaway speed.
- (b) Provision shall be made to prevent the flow of electric currents through the bearings. The bearing insulation shall be arranged, using an insulation/ metal/ insulation sandwich or similar method, so as to permit the insulation to be tested without dismantling any part of the unit.
- (c) The bearings housing shall be provided with external lubrication oil inlet pipe and return circulation pipe for hot oil back to lubrication oil system so that water cooled heat exchanger shall be provided in lubrication oil supply unit to maintain the oil temperature not more than 30 °C for normal operation.
- (d) An oil level indicator with alarm contacts shall be provided at lubricating oil supply unit and sight glass shall be provided at both bearing housings. In case of lubrication oil level is too low, the level indicator shall give an alarm signals to Governor PLC to interlock with the Unit starting sequences. No water-cooling pipes for bearing housing is allowed inside bearing housings.
- (e) The design of the bearings shall preferably be such that neither high pressure oil injection nor low pressure oil overflow during starting and stopping sequence is required.

To perform periodic oil purification, the sump tank of each lubricating system shall be provided with two pipe connections, terminated by stop

valves and screwed caps, suitable for connecting the portable oil centrifuge unit.

- (f) Both generator bearings (DE and NDE) shall be lubricated with lubrication oil which shall be directly supplied from Lubrication Oil Supply system and the hot hydraulic oil shall be cooled by using water cooled radiator or a steady-state heat exchanger.

The oil cooling system shall be of radiator type and hot oil flowing through a radiator pipes or system of pipes, where the radiator pipes shall take the heat from the hot oil and carries away with cooling water flowing through the radiator pipes or fins. Essentially it shall be performed heat transferring method from the hotter fluid to the cooler fluid.

The radiator fins shall be made of stainless steel or alloy steel to protect from corrosion and long-life operation and it shall have enough capability to cool the temperature down to get lower than 30°C.

Contractor shall design and calculate to select the proper model and materials of radiator or heat exchanger and shall submit DEDE for approval.

- (g) The proposed oil cooling radiator shall meet the following requirements:
- The use of water pipes inside bearing housing will not be accepted.
 - Fouling of cooler tubes by algae and/or bacterial growth is expected so that the radiator or cooler pipes shall be made of suitable material to permit periodic, low concentration acid injection (ten parts per million residual chlorine) into the cooling water system for algae and bacterial growth control purposes.
 - Radiator or Coolers shall be of sufficient capacity to allow the generator to run at full rated output with the coolers partly fouled and with one section of a cooler out of service for cleaning.
 - Radiator or Coolers shall preferably be so arranged that the water side of each section of a cooler can be safely drained, opened and cleaned in turn while the generator is in operation.
 - Pipe work shall be arranged to prevent emptying the cooling system when cooling water flow is stopped.
 - Cooling water shall be taken the water from penstock pipe and shall design to flow continuously through the radiator then drain-out to the tail water channel.

(4) Lubrication Oil Supply Unit

Lubrication oil supply units for both generators shall be supplied comprising with two (2) industrial type heavy duty motor-pumps mounted vertically and shall include one (1) AC and one (1) DC supply motor having enough capacity to supply oil for lubrication at both bearing housings during operation.

One (1) AC motor-driven vertical pumps shall be suitable for operation at 380Vac and shall be provided as normal duty for AC motor pump and standby duty for DC motor pump complying with IEC standards.

Protection class for both motors shall be IP54 Class with H Insulation. The rated capacity of each pump shall be sufficient for unit operation under conditions such as normal start, stop, and emergency stop of both units.

The lubrication oil temperature detection (both in and out), oil flow, filter clog, oil level signals shall be provided for Governor PLC program for Unit start-stop sequence to interlock and protection for both units for continuous operation.

Double high-pressure filter with valve for duty selection shall be fitted in the main lubrication oil supply line, fitted with visual indication and digital signal to indicate that the filter is clogged. They shall be of sufficiently fine filtering capacity to prevent damage to any portion of the bearings by foreign matters.

Cartridge type filter shall be provided, and it shall be capable of being individually replaced without shutting down the generators.

The oil filters shall be heavy duty type and fitted with differential pressure indicators to give signals for clogging and indication exchanging with new one. Filters shall be capable of being individually cleaned without shutting down the Unit.

Bidder shall submit the proposed selection of generator bearings with calculation for the related forces and loads for selected generator considering additional transient GD^2 during dummy load.

The whole lubrication oil supply system together with overall P&I diagram together with the cooling design concepts and product descriptions shall be submitted with the Bid to comply with the above requirements.

Failure to submit this evidence shall subject to rejection of the Bid.

S7.03 SIGNAL GENERATOR

(a) General

The Contractor shall provide all devices necessary for the control system as specified in this Specification and for the proper operation, maintenance, and commissioning of the units.

(b) Speed Signal Generator

Rotating Speed of generator and turbine shall be derived from the two (2) inductive (or) NAMUR type sensors located at Non Driven End of Generator using tooth wheel and the speed signals from two sensors shall deliver to Speed Monitoring Relay to indicate and divert 4-20mA to Governor PLC for speed sensing function. The independent speed sensing method shall be provided and mounted on the generator shaft without passing any fuse.

S7.04 EXCITATION SYSTEM

(1) Type and Performance

- (a) A complete digital brushless type excitation system, including automatic voltage regulator (AVR) with its related components, shall be supplied for each generator.
- (b) High speed AVR module with auxiliary windings at generator shall be provided with complete wiring and components for this system.
- (c) The excitation system shall give the following performance:
 - The system shall maintain the generator voltage stable and equal to the value determined by the voltage setting device when the generator is operating connecting with the system (or) separated from the system.
 - The maximum variation in generator terminal voltage when the operating conditions change from no load to rated generator output shall not exceed 1 percent.
 - In the event of an increase in generator frequency up to that corresponding to the maximum rise resulting from the loss of the generator load, the excitation system shall remain stable and it shall rapidly restore the voltage back to normal.
 - During transient disturbances such as load variation (or) short-circuits in the system, the excitation system shall be capable of functioning correctly and, in addition, providing increased excitation as required.

- Damping of oscillations between the generator and the power system shall always be positive and for all operating conditions within the capability of the generators.

(2) Exciter

- (a) All equipment required for the proposed excitation system shall be provided with ringless and brushless and PMI (permanent magnet insert) type and permanent magnets shall be mounted on the exciter armature poles to provide sufficient voltage. The voltage priming shall be performed in all circumstances, even after a long shut-down period.
- (b) The semi-conductor equipment shall contain several devices connected in parallel, so rated that continuous operation of the generator at rated load will be maintained despite failure of any one paralleled semi-conductor circuit. Protective devices shall be provided in the control and in the semi-conductor circuits to isolate a faulty device without interruption of the generator excitation.
- (c) Exciter Rotor shall be assembled at the shaft together with rotor. Separate shaft design is not acceptable.
- (d) The excitation equipment shall be protected from or shall otherwise withstand the maximum voltages and currents arising from short-circuits, out-of-synchronism operation of the generators, or failure of supply to the excitation system.

(3) Voltage Regulators

- (a) A digital high-speed automatic voltage regulator (AVR) shall be provided for the generator excitation system together auxiliary winding for excitation system for protection and synchronization.
- (b) AVR shall contain minimum three (3) temperature sensing inputs to monitor generator temperatures and at least 3 programmable relay outputs for alarm and trip protection to Governor PLC and SCADA PLC.
- (c) Besides Manual Control, the AVR unit shall have Open Loop Control mode where there is no feedback loop on the Generator Voltage (Auto Mode) or Excitation Current (Manual Mode). Selector Switches shall be provided in front of Governor PLC cubicle.
- (d) AVR control loop feedback algorithm shall be PID (Proportional, Integral and Differential) type only. Filter type algorithm, or any other algorithm besides the PID type is not acceptable.

- (e) The AVR unit shall provide soft start function under Auto Mode; where the Start Frequency (Hz), Start Voltage Level (% of Rated Voltage), and Ramp Time (Seconds), shall be provided under this function. External switches, Timer relay, separated PLC to achieve this function is not acceptable.
- (f) Exciter Rotating Diode monitoring function shall be included the AVR unit, where two dedicated switch outputs shall be provided in the event of Alarm and Trip, this is on top of the other AVR Alarm/ Trip outputs to Governor PLC and SCADA PLC.
- (g) The AVR power shall be supplied power from Station DC service supply and shall have capability to sense 3 phase AC voltage up to 500Vac and current sensing range up to 0-5A.
- (h) The AVR shall be responsive to the positive phase-sequence component of the generator voltage and shall be independent of frequency.
- (i) The voltage setting device for the AVR shall be suitable for operation by hand at the local control cubicle and by remote control. The device shall provide a settable range of $\pm 10\%$ (with adjustable) of nominal generator voltage.
- (j) Communication ports shall be available at AVR module such as Ethernet Modbus port, USB port, Serial ports, etc.

The Bidder shall submit the manufacturer's catalogues of AVR with the Bid to verify that the proposed AVR shall comply with the requirements stated herewith.

Failure to submit this information will subject to rejection of the Bid.

S7.05 INSPECTION AND TESTS

(1) Factory Test

Generator shall be tested at factory in front of DEDE Engineers and the test program with procedures shall be submitted to DEDE for approval.

The Bidder shall submit the list of Generator Factory Witness Test Procedures according to IEC and IEEE standards so that the evidence shall be submitted with the Bid.

The Contractor shall bare all travelling expenses (air tickets, accommodation, meal, allowance, etc.) for two (2) DEDE Engineers (as Witness) for electrical parts to

attend the test at factory and sign for approval of test results before delivery to site. If there is any defect (or) rejection of manufactured equipment, the Contractor shall perform the same test at factory again after correction with his own cost.

(2) Individual Parts

All stator and rotor coils for the generator shall be tested in the factory for grounds and short circuit between turns. In testing the generator field coils for shorted turns, readings shall be taken of ac amperes, volts, and watts, preferably using the same value of current to test all coils. Certified test reports for generator current transformers, as specified elsewhere, shall be submitted to the DEDE for approval before Witness Test.

(3) Generator

Test for Generator Unit shall be done determine the performance to determine the guaranteed efficiency as per Contract. The tests shall be done at manufacturer factory in front of DEDE Engineers and signed for Witness to verify the performance as per Guarantee Informative Data.

All tests shall be performed in according with IEEE Test Procedures for Synchronous Machines No.115 (or) IEC Test Procedures for Synchronous Machine so Contractor shall submit the test items, procedures to DEDE Engineer's Approval.

(4) Excitation System

Tests on the excitation system including tests on the components shall be proposed by the Contractor, incorporating with the reputable international standards, for the approval of the DEDE Engineer.

(5) Performance of Tests after Erections

All tests made at the Site shall be performed by the Contractor. The Contractor shall submit to the DEDE Engineer for the method of performing tests. The Contractor shall ensure that all necessary precautions are taken to guard against accident or damage to persons or property in performing the tests and shall arrange for the supply and erection of all necessary barriers, guards and danger signs for safety purpose.

The Bidder shall submit the Field Test Procedures of Turbine and Generator Performance according to the applicable IEC Standards showing the diagrams, measuring methods with instruments and calculation criteria of efficiency together with Bid.

Failure to provide information may subject to the rejection of Bidder's Proposal.

Furthermore, for the completion of Testing and Commissioning, The Contractor shall perform the following tests for the generating units before commercial operation:

- Dummy Load Test
- Operation of complete excitation system including automatic voltage regulating equipment at various loads and including load acceptance and load rejection test at 25, 50, 75, 100% of load
- Continues Load Test for 48 hours to the 22kV PEA Grid

SECTION 8
AC STATION SERVICE TRANSFORMERS AND
AC SWITCH BOARD

SECTION 8 - AC STATION SERVICE TRANSFORMERS AND AC SWITCH BOARD

S8.01 SCOPE OF WORK

The work to be done under this clause consists of the design, manufacture, supply, delivery site, installation and guarantee of the following equipment:-

- One (1) set of 100 kVA, 3,300/400Vac, 50Hz, Dry type metal-enclosed indoor, station service transformer
- One (1) set of 600 Vac, AC Distribution Board, metal-enclosed, indoor station service LV switchgear

S8.02 PURPOSE AND FUNCTION

Station service transformer (SST) shall be provided and to be used for step down the system voltage from 3.3 kV to 400/230 V to use for Station Service AC and DC Power Supply through AC distribution board. The transformer shall supply power to the units and powerhouse auxiliary services.

In case of the loss of generating power (or) in case of Unit Black start, the standby diesel generator shall be started automatically to supply AC power to the plant auxiliary equipment.

S8.03 100-kVA TRANSFORMERS

The transformers shall comply with TIS 384 and Provincial Electricity Authority's standard.

The continuous rating of the transformers shall be 100 kVA based on an average copper temperature rise of 80°C over the ambient of 40°C.

The main characteristics of the transformer shall be as follows.

Type	-	indoor metal-enclosed
Class	-	Dry type, epoxy cast resin encapsulated
Rating	-	100 kVA, 3-phase, 50 Hz
Primary voltage	-	3.3 kV, delta-connected

Tap range	-	4 full-capacity, off-load high-voltage taps at $\pm 2 \frac{1}{2} \%$ and ± 5 percent
Secondary voltage	-	400 V, wye-connected, grounded neutral
Impedance	-	standard rating
Basic insulation level (minimum)		
Power Frequency Test (1 minute)	-	19 KV (Pri), 4 KV (Sec)
Basic Impulse Level Test (BIL)	-	40 KV (Pri), 10 KV (Sec)

HV and LV Connections

The high voltage bushings shall be connected to fused interrupter switches in the same cubicle. The connections shall be with copper bus bars. The bus bar rating shall be coordinated with the fused interrupter switch and the transformer load requirements and shall be braced for the expected fault levels at the 3.3 kV buses.

The connection to the low voltage bushing terminals of the transformer shall be with 600V power cable. The Contractor shall supply for the required current-carrying capacity and braced for the required fault levels for all phases and neutrals.

Neutral point shall be brought out to a separate bushing and shall be equipped with suitable ground connector.

Ground Connections

The transformer shall have clamp type terminals for connection to the powerhouse ground system. Clamps and bolts, to accommodate a 95 mm² stranded cable, shall be provided for ground connections to the transformer core and to 2 points on the transformer enclosure.

Tap Changer

The transformer shall be equipped with a selector for off-circuit changing of the taps. This device shall have a lockable handle and position indicator external to the transformer enclosure.

High Temperature Detection

The transformer shall be equipped with a winding temperature-sensing element with alarm contacts and it shall be send status to HMI PLC Monitor for alarm and trip.

Auxiliary Power

Power from the station battery at 125 V dc (nominal) will be available for transformer auxiliary circuits.

Enclosures

The transformer enclosure shall be ventilated type and shall conform to the requirements of ANSI standards for dry type transformers. The enclosure shall be connected to generator terminal cubicle assembly to form an integral unit as shown on the Drawings. The enclosure shall match the switchgear housing in construction, appearance and finish. Provision shall be made for bolting the enclosure to the switchgear housing.

The enclosure shall be provided with a channel iron base frame with provision for bolting to the concrete floor.

Openings shall be provided for the entrance of all incoming conductors. All cable and wiring shall enter through the bottom of the enclosure. Adequately supported removable panel shall be provided, where required, to permit convenient access to all connections.

Tests

Details of the tests to be performed by the Contractor on the various components of the equipment shall be stated in the Bid and, in general, shall be as follows.

Factory Tests

Complete tests on the equipment shall be made at the factory by the manufacturer in accordance with ANSI standards for dry type transformers, to determine the performance and operating characteristics and to confirm that the equipment functions properly. In addition to these tests, the following test shall be performed.

Standard insulation withstand tests on all small wiring and on all auxiliary devices at 1,500 V to ground, 50 Hz, for 1 minute.

Site Tests

The Contractor shall check the operation of all auxiliary circuits such as gauges, etc.

The Contractor shall carry out any other tests recommended to prove that the transformer is properly installed and adjusted to operate correctly and safely.

S8.04 HIGH VOLTAGE LOAD INTERRUPTING SWITCH (Not applicable)

The high voltage fuse load interrupting switch (3P-PF) shall be 3-pole group operate for the voltage and basic impulse level specified, and shall be rated for 100-A continuous and 16,000 A interrupting current (momentary). The switches shall be mounted on NEMA rated

porcelain insulators for the voltage and basic impulse level specified. Operating mechanism shall include porcelain linkage connections to switch blades with porcelain having a basic impulse level rating at least equivalent to the switch insulators. Switch mechanisms shall be operable externally from the front of cubicle and be equipped with a quick make-and-break device to open and close the switch independently of the speed with which the operating handle is moved. The load break switches shall be capable of closing in on at least 40,000 A asymmetrical fault current without impairing the ability of the switch to carry its full rated continuous current.

Six-pole, auxiliary switch shall be provided for alarm and interlocks.

Switch Ratings

SST Interrupting - 100 A, 3-pole, 3.3 kV, 40 kV basic impulse level (minimum) with current limiting fuses

Tests

Tests shall be in accordance with ANSI C37.34. The following tests shall be made on each load interrupter switch:

- dielectric
- short-time current
- interrupting
- Corona.

S8.05 AUTOMATIC TRANSFER SCHEME

All necessary sensors, relays and controls, etc., shall be provided to automatically transfer the load to the alternative source upon failure of the normal source. It shall also be possible to connect a diesel generator unit to the switchgear.

The preferred source for station service requirement will be the 3.3 kV supply to transformer (SST) which is fed from the 3.3 kV side of main transformers.

The automatic transfer and sequence of operation shall be as follows. Refer to Drawing for the station service, single-line diagram.

When transformer SST is de-energized, breakers 52 BT and 52 SST will open, then the diesel generator set will start. When diesel is up to full speed and voltage required, breaker 52 DG breaker will close to energize.

When normal power is restored from SST, breaker 52 DG will open first and breaker 52 BT will close and either breaker 52 SST will close to re-energize. The diesel generator will shut down after DG breaker is opened.

The Contractor shall supply all the controls, relays and equipment required to carry out automatic transfer of power sources as described.

Power <u>Source</u>	52 SST E	52 BT E	52 DG E
SST	X	X	O
Diesel gen.	O	O	X

Operating Sequence

X = closed
O = open
E = electrically operated

Annunciation

The following operation shall be annunciated.

- Transfer from SST to diesel generator
- Return to SST from diesel generator
- Blocked auto transfer caused by selector switch in manual or withdrawal of supply or tie bus breakers.

The annunciation of all the above conditions is primarily to notify the operator of the status of the breakers and shall be alarmed on the control room annunciator.

Test

A test switch which located on the main control board shall allow the testing of the Automatic transfer scheme by simulating an under-voltage condition of the preferred and alternative power source and causing an actual transfer of power sources.

Selection of Manual Control

Placing the selector switch in the manual position shall make the automatic transfer scheme inoperative and will allow each individual breaker to be operated by its own control switch.

S8.06 NO-FUSE BREAKER

No-fuse breakers shall be molded case, manually operated, quick make, and quick break with both thermal and magnetic trip elements on each pole. All breakers shall be rated for 600V and shall have an interrupting rating not less than 30,000 A_{rms} asymmetrical at 400V.

S8.07 SECONDARY WIRING AND TERMINALS

The switchboards shall be complete with all accessory secondary wiring. All wiring shall be switchboard type stranded copper conductors. Conductor insulation shall be flame-retardant, heat-and moisture-resistant and shall be of the thermoplastic or thermosetting type. The insulation shall be rated at 600 V with a temperature rating of 90°C.

Wire sizes shall not be less than 6 mm² for current transformer wiring and 2.5 mm² for control, metering, annunciation, and potential circuits.

The secondary leads of instrument transformers shall be brought out through test blocks with molded phenolic covers which have internal plug contacts and make a through connection when the cover is in place. The test block contacts shall be of the live pressure type to provide positive contact with minimum contact resistance and make a through connection when the cover is in place.

The test blocks of current transformers shall be provided with auxiliary contacts which automatically short circuit the current transformers when the cover or plug is removed. The test block contacts shall be rated 250V, 10A continuous.

All wiring shall be run in plastic wiring duct or shall be formed into compact flat groups suitably bound together and properly supported. The group shall be run straight, horizontally or vertically, with short-radius right-angle bends. There shall be no splices in the wiring and all connections shall be made at 600V, 25A terminals. Suitable provision shall be made for training and supporting incoming cables from the point of entrance to the termination on the terminal blocks.

All wiring shall be identified at both ends with PVC cable markers which resist grease, oil, acids and abrasion.

The arrangements and locations of all terminal blocks shall be subject to the approval of DEDE Engineer. Circuit on the terminal blocks shall be marked with permanent marking fluid and shall be subject to the approval of DEDE. A minimum of 20 percent spare terminal blocks shall be furnished.

S8.08 CONTROL SWITCHES AND INDICATION

One (1) selector switch for selecting Remote and Local Control for the breakers mentioned above.

Indicating Lamps for all phases, annunciator window for Fault and Trip of Breakers showing clear wording shall be installed in front of Annunciator Window.

Mimic Indication in Single Line Diagram in front of AC Distribution Front Door and the mimic graphic shall be submitted to DEDE for approval.

S8.09 INTERLOCKING

All circuit breakers controlling supply points shall be electrically interlocked to prevent the interconnection of supplies. Breaker auxiliary contacts and auxiliary relays shall be used in the interlocking circuit.

Lockout devices shall be provided if applicable so that if a breaker is tripped by its own over current protection scheme, other breakers feeding into the same bus cannot be closed.

Remote Indication

The LV switchgear shall have incorporated in the metering and control circuitry, provision for remote indication of the followings:-

“Open”
 “Close”

Circuit Voltmeter	Indication	Ammeter	Voltmeter
Breaker 52SST	X	X	X
Breaker 52DG	X		
Breaker 52BT	X		

S8.10 CURRENT TRANSFORMERS

Current transformers shall be supplied in each of the transformer secondary breaker sections of the station service switchboard. The current transformers shall be of the 55°C rise dry type, used for metering and protective relaying and shall be supplied as follows in accordance with the latest edition of ANSI C57.13 for instrument transformers, or DEDE approved equivalents.

(a)	Purpose	-	Metering
	Quantity	-	3
	Ratio	-	200/5A
	Frequency	-	50 Hz
	Accuracy	-	metering
	Insulation class	-	0.6 kV
(b)	Purpose	-	Protection
	Quantity	-	3
	Ratio	-	200/5A
	Frequency	-	50 Hz
	Accuracy	-	0.5
	Insulation class	-	0.6 kV

S8.11 VOLTAGE TRANSFORMERS

Voltage transformers shall be indoor dry type, single-phase with both windings connected in open delta. Three voltage transformers shall be provided for metering and undervoltage relaying on each incoming bus section.

S8.12 INSTRUMENT SECTIONS

The station service switchboard shall be provided with the instrument sections. The instrument sections shall house the instruments, protective relays and voltage transformers as specified.

AC Ammeters

Ammeters shall be flush-mounted, taut-band suspension type, not less than 110 mm square with circular scale not less than 180 mm in length for 250 degree rotation, black figures on white background, 1 percent accuracy class, 0 to 200A scale for 5A, 50Hz circuit.

AC Voltmeters

Voltsmeters shall be taut-band suspension type, flush-mounted, not less than 110 mm square with circular scale not less than 180 mm in length for 250 degree rotation, black figures on white background, 1 percent (%) accuracy class, 0 to 600 V for 110V, 50-Hz circuit.

Watt Hour Meters or Power Meter

Polyphase watt hour meters, for a 3-phase, 4-wire circuit, current transformer rating 900-5 A, voltage transformer rating 400-110 V, 50 Hz, to read and indicate kilowatt hour and

kilowatt demand, complete with mechanical demand register, 5 dials, with anti-reverse device for unidirectional operation.

AC Voltmeter Switches

Voltmeter switches shall be rotary, panel-mounted type, enclosed contact mechanisms with removable cover, renewable, self-cleaning, maintained 6 normally open and 6 normally closed contacts, rated 600 V, 20 A continuous, 50-A make and 30-A break at 120 V, 50-Hz inductive load, pistol-grip handle, 4 positions with escutcheon plate engraved “OFF”, 1-2, 2-3, 3-1”, and wired for 3-phase, 4-wire circuit.

Relays

- 51, inverse time over current phase consisting of 3 single-phase relays, semiflush mounting in draw out case
- 51N, inverse time over current, semiflush mounting in draw out case

It is intended that this relay, upon sensing a ground fault, shall trip the incoming breaker. If the fault persists it shall then trip 52G. This same sequence of operation shall apply to new Unit.

- 27S, Undervoltage relay for use with automatic transfer scheme, semi flush mounting in draw out case
- Auxiliary relays as required for automatic transfer scheme.

The number of instruments and relays which shall be provided for the AC station switchboard shall be as follows.

Frequency meter	1
Wattmeter	2
Ammeters	2
Voltmeters	2
Kilowatt hour meters (or power meter)	1
Voltmeter switches, Ammeter Switch	2
All meters can be use two sets of power meter.	
51 relays	3
51 N relays	1
27 relays	2

All meters can also be integrated in Digital Multimeter and provide two sets of power meters.

All protection relay shall also be combined and in Multifunction Relay and comply relaying functions as per the single line diagram.

S8.13 GROUNDING

A grounding copper bus bar not less than 5 mm by 50 mm shall be provided along the front and rear of the switchgear. The ground bus shall be solidly bolted to the steel framework so as to make good electrical contact. Provisions shall be made at both ends of the switchgear for connection of the ground bus to cables from the station ground mat. Two clamp type terminals suitable for 95-mm² stranded bare copper conductor shall be provided. All non-current carrying parts shall be connected to the ground bus.

S8.14 NAMEPLATES

Nameplates of black background with white lettering and shall be provided for all LV. Switchgear identifications. Transformer nameplates shall be 22 cm wide by 4 cm high, with letters 19 mm high, centered on the plated.

All nameplates shall be attached to the switchgear with rust-resistant steel, self-tapping screws. The transformer, switchgear and all switchgear appurtenances shall be identified and all nameplates shall be subject to the DEDE Engineer's approval.

S8.15 CHANNEL BASES AND BOLTS

The Contractor shall provide the foundation bolts and channels necessary for holding down of fixing the equipment to the concrete foundations. Where the design of the equipment requires special clamps to be used with the foundation bolts, these clamps shall be provided by the Contractor.

S8.16 TESTS

The assemblies and their individual components shall be factory and field tested by the Contractor in accordance with the test specifications outlined herein.

Factory Tests

The following tests shall be made according to the appropriate standards to ensure compliance with specifications.

Switchgear Assemblies

- Standard production tests as specified in NEMA SG 5 and ANSI C37.20 or approved equivalent

- Impulse and thermal tests as specified in NEMA SG 5 and ANSI C37.20 or approved equivalent.

Operational Checks

- Continuity and polarity tests on all coils and circuits
- Functional tests on the automatic under-voltage transfer scheme, and on the over current protection.

Field Tests

Such tests shall be carried out in the field, as are necessary in the opinion of the Engineer, for the satisfactory start-up and operation of the apparatus. These will normally comprise

- Control and secondary wiring check of complete installation
- Dielectric tests on control and secondary wiring using 1,000V megger
- Functional tests of the breaker operation, metering, relaying and the automatic transfer scheme.

SECTION 9
GENERATOR TERMINAL CUBICLES, BUS DUCTS
AND NEUTRAL CUBICLES

SECTION 9 – GENERATOR TERMINAL CUBICLES, BUS DUCTS AND NEUTRAL CUBICLES

S9.01 SCOPE OF WORK

The work of be done under this section consists of the design, manufacture, testing, delivery to site, installation, placing in successful service, and guarantee of:

- 2 generator circuit breaker cubicles
- 2 generator CT, PT cubicle
- 2 generator excitation transformer cubicle (if applicable)
- 2 generator neutral cubicles
- 1 station service transformer cubicle
- 1 station service disconnecting switch cubicle

S9.02 PURPOSE AND FUNCTION

Generator Circuit Breaker Cubicles

The generator circuit breaker cubicles shall contain generator circuit breakers, surge arresters, current and voltage transformers for protection and regulation of the generators.

Generator CT, PT Cubicle

The generator CT, PT cubicles shall contain CTs and PTs for measuring and protection function as well as lightning arresters. And the components shall also be installed in separate cubical or built in generator circuit breaker cubicle.

Generator Excitation Transformer Cubicles (if applicable)

The generator excitation transformers cubicle shall contain excitation transformers which is to sense the voltage for AVR and excitation transformers can also be integrated inside AVR control cubicles or excitation cubicles.

Generator Neutral Cubicles

The neutral grounding equipment is to be used for grounding the stator winding neutrals of the generators. The stator winding neutral grounding equipment shall be suitable for limiting damage and detection of stator ground faults.

S9.03 STANDARDS

The equipment and accessories shall be designed, manufactured and tested where applicable, in accordance with the following standards, codes or approved equivalent standards.

Requirements, Terminology and Test Procedure for Neutral Grounding Devices	IEEE 32
High Voltage Metal Enclosed Switchgear and Control Gear	IEC 62271-200

S9.04 GENERATOR CIRCUIT BREAKER CUBICLES AND BUS DUCTS RATINGS

The generator circuit breaker cubicles shall be of metal-enclosed construction in accordance with the requirements of IEC 62271-200, unless otherwise stated herein. Type test report and calculation for selection of the proposed switchgear and generator circuit breaker shall be submitted together with the Bid.

The rating of the Generator Circuit Breaker cubicles, Bus Tie Cubicles and their related accessories shall be as follows:

- Voltage	3.6 kV
- Frequency	50 Hz
- Phases	3
- System	3-wire delta
- Continuous current (minimum)	630 A (minimum)
- Short-time (3 seconds) current	25,000 A _{rms} asymmetrical
- Momentary (1 second) current	25,000 A _{rms} asymmetrical
- Standard low frequency (50 Hz) insulation withstand strength	38,000 V _{rms}
- Standard 1.2 by 50 µs, full-wave impulse withstand strength	95 kV crest
- Temperature rise (above 40°C ambient outside of the enclosure for the generator terminal cubicles)	65°C indoor

The rating of the Bus Ducts shall be not less than 630A and the rated voltage should be at least 3.6 kV having proper arrangement for interconnection with one cubicle to another under safety conditions.

S9.05 EQUIPMENT DETAILS

Generator Circuit Breaker Cubicles

The Contractor shall supply two generator circuit breaker cubicles for Generating Unit 1 and 2, and each shall consist of the followings:-

<u>Quantity</u>	<u>Description</u>
1	A type tested metal-clad compartments (Circuit breaker compartment, busbar compartment, cable compartment and low voltage compartment) shall be supplied to house the generator circuit breaker. The circuit breakers to be supplied shall be draw-out type, three poles, ang single throw having the following minimum ratings.

<u>Quantity</u>	<u>Description</u>
	Type SF6 (or)VACUUM TYPE
	Voltage 3.6 kV
	Frequency 50 Hz
	Continuous current 630 A
	Interrupting capacity at 3.6 kV 25 kA
	Short-time (4 s) withstand strength 25,000 A _{rms} asymmetrical
	Short-time (momentary) withstand strength 25,000 A _{rms} asymmetrical
	Breaker Operating Voltage 125 VDC supply
3	Lightning arrester, gapless type

Generator CT, PT Cubicles

- | | |
|---|---|
| 1 | A type tested metal-clad compartments (Circuit breaker compartment, busbar compartment, cable compartment and low voltage compartment) shall be supplied to house the voltage transformers, current transformers., surge arresters, and ratings as stated in Clause S9.04. The CT and PT cubicle can be combined into generator circuit breaker cubicle but to serve the same function and electrical location. |
|---|---|

<u>Quantity</u>	<u>Description</u>								
6	Current transformers for metering, protection and regulation, single phase, dry type and shall have the ratings as below: - <table> <tr> <td>- Ratio</td><td>200/5/5 A or suitable</td></tr> <tr> <td>- Accuracy</td><td>5P20 or better</td></tr> <tr> <td>- Capacity</td><td>to be specified by Contractor</td></tr> </table>	- Ratio	200/5/5 A or suitable	- Accuracy	5P20 or better	- Capacity	to be specified by Contractor		
- Ratio	200/5/5 A or suitable								
- Accuracy	5P20 or better								
- Capacity	to be specified by Contractor								
3	Voltage transformers for metering, protection and synchronizing, single-phase, dry type and shall have the ratings as below: - <table> <tr> <td>- Ratio</td><td>3.3/ $\sqrt{3}$ kV/ 110/ $\sqrt{3}$/ 110/ $\sqrt{3}$</td></tr> <tr> <td>- Capacity</td><td>To be specified by Contractor</td></tr> <tr> <td>- Accuracy</td><td>0.5</td></tr> <tr> <td>- Basic impulse level</td><td>40 kV</td></tr> </table>	- Ratio	3.3/ $\sqrt{3}$ kV/ 110/ $\sqrt{3}$ / 110/ $\sqrt{3}$	- Capacity	To be specified by Contractor	- Accuracy	0.5	- Basic impulse level	40 kV
- Ratio	3.3/ $\sqrt{3}$ kV/ 110/ $\sqrt{3}$ / 110/ $\sqrt{3}$								
- Capacity	To be specified by Contractor								
- Accuracy	0.5								
- Basic impulse level	40 kV								

3 Surge arrester, station type, as specified by generator manufacturer

1 Surge capacitor, 3 – pole, as specified by generator manufacturer

Buses and Cable connections for the generator circuit breakers, voltage transformers, current transformers, surge arresters, excitation transformers (if applicable), and ratings stated in this section complying with the reputable standards specified herein.

Sufficient quantity of terminal boards to accommodate external wiring required.

Station service transformer cubicle

The Contractor shall supply one (1) station service transformer cubicle. It's rating and details are specified and shown in SECTION 8.

Station Service Disconnecting Switch Cubicle

The Contractor shall supply one (1) station service disconnecting switch cubicle and the ring main unit (load break switch) type can also be supplied and having the following ratings as minimum.

<u>Quantity</u>	<u>Description</u>
1	Circuit breaker or Disconnecting Switch
	Type Air Circuit Breaker or SF6 or Vacuum
	Voltage 3.6 kV
	Frequency 50 Hz
	Continuous current 630 A
	Interrupting capacity at 3.6 kV 25 kA
	Short-time (4s) withstand strength 25,00 A _{rms} asymmetrical
	Short-time (momentary) withstand strength 25,000 A _{rms} asymmetrical
	Operation voltage 125 VDC supply
3	Lightning arrester, gapless type

Generator Neutral Cubicles

The Contractor shall supply two generator neutral grounding cubicle and each shall consist of the followings:-

<u>Quantity</u>	<u>Description</u>
1	Isolating switch, single-pole, and hook-stick operated, suitable for 3.3 kV, 630 A

3 Current transformers, single phase, dry type, for protection shall be rated as follows: -

- Ratio 200/5 A or suitable
- Accuracy 5P20 or better
- Capacity to be specified by Contractor
- Voltage 3.3 kV

1 Single phase neutral grounding transformer

S9.06 DESIGN AND CONSTRUCTION OF GENERATOR TERMINAL CUBICLES

The Generator terminal cubicle shall be indoor, air-insulated, metal-enclosed and metal-clad switchgear with withdrawable circuit breaker devices. The switchgear shall be complete, ready for installation, with all components furnished unless specifically excluded herein.

The switchgear shall be type tested and designed and tested as per the latest updated IEC 62271-200 with the circuit breaker as per the latest updated IEC 62271-100 and each cubicle shall consist of switchgear enclosure, and the power equipment contained within the housing shall be of dustproof construction.

The housing, partitions, etc., shall be fabricated from sheet steel panels having a minimum thickness of 3 mm, structural shapes and nonmagnetic materials where required, in such a manner that the complete structure shall be rigid self-supporting and free from magnetic vibration, twist and weave.

The switchgear shall have 4 compartments that are Busbar compartment, circuit breaker compartment, Medium Voltage Cable compartment and Low voltage compartment. There shall be a partition to separate each Busbar compartment between the adjacent compartments.

The shutter between circuit breaker and Busbar compartment shall be made of metal. All sheet steel panels used in the construction of the walls, partitions, hinged doors and removable panels, etc., shall be adequately supported and stiffened to prevent flexing and excessive vibration.

Each cubicle shall be provided with a steel channel base frame with provision for bolting it to the concrete floor and placed adjacent to the panel of the station service transformer cubicle. The switchgear shall be of the same type and model for transformer and generator circuit breaker cubicles.

An opening shall be provided in the bottom of the housing to permit the entrance of instrument transformer secondary and miscellaneous cables which will be terminated in the auxiliary compartment.

An electric heater to prevent condensation shall be provided in accordance with Clause S1.23 (10).

The Contractor shall be responsible for the coordination, proper physical fit and other interfacing functions, including the location and phasing of bus terminations. The surge protectors, voltage transformers, 3.3 kV buses and bus connections in each cubicle shall be installed in cable compartment of the same panel and the auxiliary compartment shall be provided containing the voltage test devices, voltage transformer secondary fuses, current test link blocks and termination boards.

A hinged door shall be provided on the front of the auxiliary compartment. All hinged doors shall be equipped with semi-concealed highs and suitable locks. Similar locks shall also be provided on the voltage transformer drawers.

All compartment doors shall be so constructed that they will not seize in the event of a fire within the cubicle.

Ventilating louvers shall be provided in the hinged doors, and in other locations where required, to prevent undue temperature rise. The ventilating louvers in the hinged doors and in other locations of the housing shall have openings small enough to prevent the entrance of rodents and insects. Openings between adjacent compartments for ventilation purposes will not be permitted.

Entrance bushings shall be used for insulating and supporting the buses and bus connections that pass from 1 compartment into another. Where the use of bushings is not practical due to space limitations, panels of approved insulating materials may be used instead for this purpose. The arrangement chosen shall ensure a reasonably tight seal between compartments.

All materials used in the cubicles, such as bus insulation, bus supports, etc., shall not independently support combustion.

Equipment and connections within each compartment shall have their mounting bolts arranged so that it will be possible to replace them without removing from service equipment in adjacent compartments.

The voltage transformers shall be mounted on smooth-rolling, draw-out carriages. The voltage transformers shall be single-phase, and each voltage transformer shall be furnished with primary current-limiting fuse.

Provision shall be made for a maintenance check on the primary contact alignment of the voltage transformers by providing a wire-glass window (s) in the back plate that can view the voltage transformer and fuses.

The voltage transformers and fuses shall be completely disconnected and visibly grounded when in position to permit inspection or to permit access for removal or replacement of fuses.

The voltage transformer core shall not saturate at voltages lower than 110 percent of system voltage. The voltage transformer assembly shall have provision for padlocking in the disconnected position, and it shall be possible to close the outer door with the voltage transformers left in the disconnected position.

The buses and bus connections shall be of copper bar, and supported on suitable insulators and properly braced to withstand the short-circuit forces. The bus bars shall be fully insulated throughout and also at tap-off points using flame-retardant, track-resistant, non-hygroscopic materials.

Joints between bus sections, etc. shall have their contact surfaces silver-plated, and shall be fastened with bolts, nuts and locking devices.

Bus bar supports between panels shall be tightly sealed between compartments. Means of linear expansion shall be provided.

Means shall be provided for permanent grounding of all exposed non-current-carrying metal parts of the generator terminal cubicle and secondary neutrals of the instrument transformers as required by the specified standards. All parts of the framework shall be in good electrical connection with one another for grounding purposes.

A continuous ground bus, 50-mm by 6-mm copper bar, extending the full length of each cubicle, shall be provided. A non-solder lug, suitable for connection of external 96-mm² stranded copper conductor, shall be provided at each end of the ground bus.

S9.07 DESIGN AND CONSTRUCTION OF GENERATOR NEUTRAL CUBICLES

In case of generator neutral grounding cubicles supplied, each cubicle shall be fabricated according to Clause S9.06.

The incoming cable from the generator stator will enter through the bottom of the cubicle via conduits (or) cable trench.

Each cubicle shall be provided with hinged door(s) at the front of the cubicle, each door complete with 3-point latching device and lock. A wire-glass window shall be inserted in

the front door, located so that the position of the isolating switch may be observed without opening the door.

An electric heater to prevent condensation shall be provided. Means shall be provided for permanent grounding of all exposed non-current-carrying metal parts of the generator neutral grounding cubicle as specified in Clause S9.06 and required by the specified standards.

S9.08 WIRING AND WIRING TROUGHS

Care shall be exercised in routing and clamping the switchboard wiring to prevent damage to the cotton-braid covering and thermoplastic insulation.

Circuits of different voltages shall not be run in the same wiring trough. Separable wiring troughs or ones with barriers shall be used for this purpose.

Connections for termination boards shall be readily removable for test purposes. Secondary devices shall be adequately protected from possible faults on the power circuits.

S9.09 TESTS

Complete tests shall be made at the factory by the Contractor on the various components of the equipment, in accordance with the appropriate standards, to determine the performance and operating characteristics, and to determine whether or not the guarantees have been met. The following tests shall be included for each of the components as outlined below.

Generator Circuit Breaker Cubicles

- Mechanical operation of all components to ensure that all parts operate properly.
- Electrical operation and continuity tests of all circuits and isolating switches.
- Standard 50-Hz insulation withstand test of each switchgear assembly at 19kVrms for 1 minute. The voltage transformers may be disconnected for this test, but shall be subjected to individual tests as covered by the applicable standards.
- Standard 1.2 by 50-microsecond full-wave impulse withstand tests at 60 kV crest on one of each representative switchgear assemblies. The voltage transformers shall be left connected for this test.
- Standard temperature test on one representative generator terminal cubicle only.

Qualification and factory tests on voltage transformers shall be in accordance with ANSI C57.13.

The factory tests shall be made on each voltage transformer including type test and routine test reports shall be submitted to DEDE for approval before delivery.

SECTION 10
DC STATION SERVICES

SECTION 10 - DC STATION SERVICES

S10.01 SCOPE OF WORK

The work to be done under this section consists of the design, manufacture, testing, delivery to site, installation placing in successful service and guarantee of: -

- 1 (one) 125-V battery with racks and fuses, 400 AH minimum
- 1 (one) Battery Charger
- 1 (one) DC distribution panel board with instruments and circuit breakers

S10.02 PURPOSE AND FUNCTION

The DC station service system, comprising of Lead-acid vented type battery, battery charging equipment and dc distribution panel board, shall be used for PLC Controlled Automation System, Protection, Monitoring and Alarm System, Turbine Governing System, Lubricating Oil System, Motor Control Centers, MV and LV Switchgear, 22 kV Switchyard Equipment, Annunciator System, emergency lighting and other essential DC loads which are to be used during shutdown and start-up of the generating unit.

S10.03 BATTERY

The batteries shall be 125-V, lead-acid vented type in shock-absorbing, translucent polypropylene plastic containers, in order to check the electrolyte level and manufacturer shall be certified according to ISO 9001 series quality standard complete with intercell connectors and standard accessories.

Each battery shall consist of number of cells for total minimum capacity 400 AH, 10 hrs rated with the following sequence of operation during trip, shutdown and start-up of the generating unit as minimum: -

- Both generator breakers and one-line breakers (total 3) trip simultaneously.
- Generator and line breakers reclosing sequentially.
- Both reclosed breakers trip simultaneously.
- No generation or other AC Supply is not available for 5 hours.
- Emergency Lamp for 5 hours.
- Indicating lamps, annunciation inside Control Room
- Continuous DC Supply for PLC Control Panels, HMI PC, Touch Screens, Printers, Modems, Routers, etc.

This duty cycle, together with an allowance of 10 percent for design margin, shall be used as a minimum to determine the battery capacity.

Bidder shall submit the Battery and Battery Charger Sizing according to IEEE 485-“Recommended Practices for Sizing Lead Acid Batteries for Stationary Applications” and the Design Load Profile and Calculated Battery and Charger Sizing shall be submitted with the Bid verifying the proposed capacity is enough for equipment supplied under this contract.

The battery (lead-acid) shall have a capacity to supply the duty cycle given above, without assistance from the charging source and without the battery dropping below 1.8 Volts/cell. The battery (lead-acid) shall be constructed using the best industry practice. It shall have the polarity permanently and legibly marked on each terminal or on the cover adjacent to the terminal.

The battery shall be supplied complete with lead-covered copper intercell and connector ratings shall suit the maximum discharge current of the battery.

Cells shall have sufficient sediment space so that cleaning during the normal life of the battery may be avoided.

S10.04 BATTERY RACKS

Freestanding steel battery racks with lead-liner trays shall be provided for supporting the complete battery. The racks shall have a maximum of 2-3 tiers. They shall be sized and arranged to allow sufficient clearance for battery maintenance inside the battery room.

The battery racks shall be constructed from angle steel. The trays shall be fabricated from sheet steel and lined with sheet lead.

All surfaces shall be free from sharp edges and burrs, and the trays free from dents and bulges.

The lining of each tray shall be so fabricated that it overlaps the edges of the tray, and the only joints shall be at the corners. These joints shall be watertight.

S10.05 INSTRUMENTS ON DC DISTRIBUTION BOARD

The DC station service installation shall include a panel for the followings:

- DC ammeters complete with shunt and fuses (to measure total DC load and battery current)

- Non-automatic circuit breaker to disconnect battery from load
- Voltmeter and fuses to measure battery voltage
- Undervoltage relay to detect loss of dc with an ac alarm contact
- Ground detective relay with an alarm contact.

S10.06 BATTERY CHARGER

The battery charger shall be fully automatic, rectifier controlled design for automatic float and boost charging of batteries, to be enclosed inside a metal cabinet suitable for floor mounting. The charger is to supply DC at constant voltage for the average dc powerhouse load and for maintaining the battery, connected in parallel with the load, in a fully charged floating state. The ac supply source will be single-phase, 230-V nominal rating, 50 Hz.

Voltage regulation shall be ± 1 percent, with ac supply voltage variation of 10 percent and frequency variation of 5 percent from 0 to full load of the charger.

The nominal output of the charger shall be 125 V dc, with the battery voltage range of 105 V to 140 V dc.

The equipment shall be of the static type, with no moving parts. It shall be equipped with automatic float-equalizer, 28-d timer and with protection against sudden line voltage variations. Protection shall also be provided against damage due to overload.

The charger shall be connected with PLC Controller by using LAN (or) RS 232 (or) RS 485 cable to send the real time status of information about the battery, charger and load information.

The charger shall have manual switching to the high rate charge mode. Switching from high rate to float charge mode shall be automatic.

The charger shall be equipped with the following protective devices.

- Circuit breaker with thermal magnetic trip unit for dc output. The minimum interrupting capacity of the breaker shall be 10,000 ADC. Its current rating shall be 1.5 to 2.0 times the charger rated current.
- A reverse current limiting device to protect the battery in the event of ac failure.
- Annunciator Lamps shall show indication under the following conditions:-
 - Opening of the DC output breaker
 - Failure of the ac supply
 - Loss of charger control voltage
 - Battery charger failure
 - DC output undervoltage
 - AC output overvoltage

- Each of the annunciator circuits shall be wired to terminal blocks for connection to a remotely located annunciator. Alarms at the charger are not required.

The charger shall automatically return to service on restoration of ac supply after an interruption.

Indicating lamps equipment status indications shall be provided.

All relays supplied shall be of the dustproof type.

The battery charger and auxiliary equipment shall be contained in a single, general purpose, ventilated enclosure, suitable for floor mounting indoors. The enclosure shall be fabricated from sheet steel panels. It shall be rigid, self-supporting and free from magnetic vibration, twist and weave. All panels used in the construction of the enclosure including partitions and doors shall be adequately supported and stiffened where necessary to prevent flexing.

Components shall be arranged within the enclosure, with access via a hinged front door, for convenient inspection and maintenance and for making external connections.

Meters, indicating lamps and other externally accessible devices shall be located for convenient viewing or operation.

A copper clamp type connector having a conductor range of 25 mm² shall be bolted to the enclosure for connection to the station ground system.

The enclosure shall have a nameplate giving charger input and output ratings and other pertinent information.

Identification tapes, Dymo embossing type, 13 mm wide or equivalent, shall be used for identifying fuses.

S10.07 DISTRIBUTION PANEL BOARD

The distribution panel board shall be suitable for floor mounting. The panel board shall have sufficient capacity for containing a main circuit breaker and up to thirty 2-pole branch breakers. The panel board shall have a voltage rating of 250 V dc and a short circuit capacity of 10,000 ADC. Its current-carrying capacity shall be sized for the maximum discharge capacity of the battery and shall be a minimum of 400 ADC.

The main breaker shall be a molded case type, 2-pole. It shall have a voltage rating of 250 V dc and an interrupting capacity of 10,000 ADC. Its frame size shall be rated to suit the maximum discharge capacity of the battery and shall be a minimum of 400 ADC. This breaker shall have a thermal magnetic trip unit.

The panel board shall have 30 branch circuit breakers, molded case type, 2-pole, each with a thermal magnetic trip unit and 1 set of Form C auxiliary contacts. Each breaker shall have a voltage rating of 250 VDC, an interrupting capacity of 10,000 ADC and a frame size of 100 ADC.

The breaker trip ratings are provisional. The Contractor shall determine final ratings according to design requirements.

The main and branch breaker auxiliary switches shall be wired to separate terminal blocks. The normally closed auxiliary contacts of the branch breakers shall be connected in parallel and wired to 1 pair of terminal blocks. The contacts of each spare breaker shall be wired to 1 set of terminals.

S10.08 CABLE INTERCONNECTION

The Contractor shall supply properly sized cables between the battery, the instrument panel and the battery charger. The Contractor shall also supply and coordinate cable size between the battery circuit breaker and the distribution panel.

S10.09 TESTS

Complete tests on the equipment shall be made at the factory by the Contractor to determine the performance and operating characteristics and to confirm that the equipment function properly. Details of the tests to be performed on the various components of the equipment shall be submitted, and the following tests shall be done as follows:-

Battery Charger

- Mechanical operation of the components to ensure that all parts operate properly.
- Standard insulation withstand tests on all circuit breakers, relays, switches and other devices and on all wiring at 1,500 V to ground, 50 Hz for 1 minute.
- Continuity and polarity test on all circuits.
- Functional and operational checks of all equipment and all control, metering and protection circuits.
- Load simulation under various input voltages from 180 V to 230 VAC.

Distribution Panel board, Instrument Panel and Circuit Breakers

- Mechanical operation of all circuit breakers to ensure that they operate properly.
- Standard insulation withstands tests on all circuit breakers and on all wiring at 1,500 V to ground, 50 Hz for 1 minute.

SECTION 11
CONTROL, PROTECTION AND ALARM SYSTEM

SECTION 11 - CONTROL, PROTECTION AND ALARM SYSTEM

S11.01 GENERAL

(1) Responsibilities

- a) The Contractor shall design, supply, procure, delivery to site, installation, testing and commissioning the control; monitoring and protection system for the turbine, generator, governor, transformers, switchgears and other related station auxiliaries including all interfaces and associated equipment.
- b) The contractor shall supply, deliver, install, testing and commission all control, protection and alarm system equipment and have overall responsibility for successful start-up, commissioning of turbine-generator units, governor, inlet valves, transformers, MV switchgears and other station auxiliaries which are to be supplied under this contract.
- c) For Protection, Metering and Alarm System, the Bidder shall provide overall electrical single line diagram with complete relay numbers, meters for electrical protection and metering according to ANSI, IEC and IEEE Codes and the description detail for the Bidder's proposed system to be submitted together with Bid.

For Control, Monitoring and Alarm System, the Bidder shall submit together with the Bid for Control and Monitoring System Configuration Diagram together with Normal Start, Stop and Emergency Shutdown Sequence for Unit as well as logic diagram (or) flow diagram for Generating Unit Operation.

- d) Equipment and Components, which are to be used in Automation Control System, shall be submitted in the Bid together with manufacturer's product catalogs such as PLC CPU modules with redundancy, I/O modules, Power Supply Modules, Ethernet Modules, HMI Touch Screen, Notebook and Controller Chassis together with Licensed Software used for controlling and monitoring of Generating Unit operation.
- e) The protection system of the station of based on the principle of local back up. In other terms, any fault occurring anywhere on generator feeders, outgoing line, line transformer or on bus bar shall be detected and cleared locally by relays and breakers located in the substation (or) switchyard. In the event of failure of battery, instruments or relays, the system should detect and enable to clear all failures of equipment.

(2) Requirements for Systems

- a) Each system shall be designed to have high reliability and availability and however it shall be simple to operate and maintain by DEDE operator. The failure of any equipment or the loss of power supply to equipment shall not jeopardize the plant and shall initiate an alarm.
- b) The normal control shall be operated at operator control station in the control room and for the purpose of system maintenance, commissioning or testing, it shall be done by via both engineering PLC and local control graphical HMI Touch Screen at Governor PLC control panel.
- c) The control system shall comprise a number of programmable logic controllers (PLC), a digital PLC governor system, an excitation with digital automatic voltage regulator (AVR), a digital protective relay and synchronizing system. This PLC shall be connected to the human-machine interface (HMI) via of data communication cable. The metering and instrumentation of equipment and the related system shall be provided information for operator including annunciation system.
- d) The operation for Generating Sets shall be by both automatic mode and local manual mode. A typical automatic mode shall be a programming control sequence stored and programmed in the PLCs. The control functions shall be included supervising, controlling and monitoring to the unit conditions, recording the sequence of events, periodically fault and alarm events, providing integration of historical trending display, bar chart display and guidance messages.

The Bidder shall submit PLC Manufacturer's Letter of Confirmation for PLC Control System stating that the PLC manufacturer will design, supply and supervision for commissioning start-up and guarantee performance for their Supplied Products with Licensed Software complying with DEDE Specifications specified under this section 11.

The scope of supply for PLC control system of this power station shall be to control and monitoring of two (2) Sets of generating unit with station auxiliaries and it shall be comprised of the following equipments.

- (a) Operator Control Station 1 Set (Including software same brand name with PLC to control operate the TG unit and Dongle or USB key licensed)
- (b) Laptop/ Notebook computer (Industrial Type) for engineering work station 1 set (Including Dongle or USB key license software tool for engineering work station notebook to adjust or modified system configuration, changing parameters and to perform commissioning and testing for the unit)

- (c) Programmable logical controller (PLC) with software in unit control PLC cubicle for each unit and shall be comprised of:
- Redundant central processing units (CPU), power supply modules, IO Modules and Communication Modules
 - Redundant Digital Excitation System for each unit
 - Redundant Ethernet Bus to communicate and control Digital Governor
 - Redundant Ethernet Bus to communicate and control multifunction protective relays & all meters
 - Redundant Ethernet Bus to communicate and control with Excitation system
 - Redundant Ethernet Bus to communicate and control Synchronization unit
 - I/O modules to interface with equipments to perform unit control function
 - HMI Touch Panels with 12" screen (Built-in two (2) individual Ethernet port) same brand name with PLC Controller for both Unit PLC and Governor PLC for local operation.
 - Interfacing ports with engineering station (Notebook Computer)
 - Licensed Software for Governor and Unit PLCs, which shall be same Brand with PLC Module manufacturer.
- (d) Automatic Synchronization including synchroscope completed with accessories 1 set
- (e) Digital protective relay system two (2) sets including software for engineering laptop
- (f) Local Area Network (LAN) System including switching hubs 1 lot (Including interfacing port)
- (g) Metering, instruments and annunciation display unit including transducers for two (2) generating sets, auxiliary and switchyard equipment.
- (h) Periphery equipment such as 2 sets of LCD monitor (24" or Larger), 1 Set of Laser Printer (with LAN Port), 1 set of operator control desk (heavy duty type, steel structure construction) with chairs, etc.
- (i) All design documents and drawings including equipment sizing, calculations, relay coordination study, relay settings, system block diagrams, layout; schematics; and wiring diagrams.
- (j) Logic flow charts or descriptions for control sequences.

- (k) Control system input and output lists
- (l) Alarm list
- (m) Format of predefined reports

Bidder shall submit the complete information and documents with the Bid indicating all scopes, component model/ type complying with the requirements as stated in this section clearly submitting all related evidences to verify that the Proposed Control System meets the DEDE requirements.

Failure to comply, submit, indicate the required items in this clause will subject to rejection of the Bidder Proposal.

- (n) Branch circuits for each function shall be individually protected. Provision shall be made to enable isolation of each circuit separately.
- (o) Control, annunciation, alarm and protection circuits shall operate at 125 VDC and the consumable capacity for Battery and charger sizing calculation shall be submitted with the Bid.
- (p) All indicating and pilot lamps shall be of the low power, cool operating with DC, switchboard type, with color caps and mounted resistors integrally. All indicating lights shall be suitable for operating at 125 VDC.

(3) Requirements for Devices

(a) Programmable Logic Controller (PLC)

A programmable logical controller shall be a well-proven 32-bit processor design with wide range of I/O modules accepting discrete, analog and RTD inputs and shall have flash card for data and parameter storage. The PLC shall provide on-board self-diagnostics, with on-board LED indicators defining processor controller status. As a minimum, the process controller shall support the following attributes:

- Built-in minimum RAM 64MByte and Flash 64MByte
- Processor speed minimum 1GHz
- Built-in One RS-485 port and one RS-232 port
- Analog loop shall be processed at operator tunable rate down to 10 times per second
- Binary loop shall be processed at operator tunable rate down to 10 times per second
- A full range of preconfigured algorithms that can be used to implement control strategies

- Capable of being configured in ladder logic or capable of executing higher level programming languages such as BASIC, C or capable of executing operator-defined functions not included in the standard function
- Capable of executing any combination of the above functions, i.e., Standard algorithms, ladder, higher level programming languages, etc.
- Capable of peer-to-peer communication with any of additional Operator Control Stations and every other module in the system
- Support Ethernet TCP/IP communication to Remote I/O unit
- Storing control configurations (software) on-board in non-volatile memory and capable of retaining configuration information for at least 1 year. The system shall alarm when the battery reach a low-voltage condition before failure.

Controller Redundancy: The Controller shall be redundancy of the Central Processing Unit (CPU) and Power Supply redundancy for Unit Controller, Governor PLC, digital excitation AVR system. The evidences such as product catalogs, configuration diagram and CPU specifications proofing for system redundancy shall be submitted with the Bid.

As the primary module executes the control function, the backup module shall wait in hot standby mode. In case of the primary module fails, the backup module shall take over the primary module's job without any interruption. Redundancy switchover time will be maximum 5.16 msec. Failed module shall be replaceable on-line without disturbing (Hot swap) the process.

Maximum Processing Time: The processing time of the particular controllers shall be dedicated to the requirement of the controlled technological process and shall be in accordance with the following three categories, with maximum processing time not exceeding the specified limits:

- 50 ms for quick-acting process, e.g. Electrical processing system
- 150 ms for normal sequential controls, e.g. Pump control or valve actuator control
- 250 ms for modulating control

The above processing times included input operation, logic or function processing' and output operation.

(b) I/O Modules

The I/O modules shall be able to support process signals from various types of sensors and contact devices without requiring external or auxiliary signal conditioning devices. The Digital modules shall include the following features:

- Binary input: capable of receiving 24 Vdc, 125 Vdc
- Binary output: Isolated contact rated at least 0.75 A, 24 Vdc, 125 Vdc and user selectable as normally open or normally closed
- Support minimum 32 points / module
- Signal isolation and Operate either signals are Positive or Negative logic
- Output provided with Electronic Short Circuit Protection (ESCP)
- Detection of the quality and presence of input signals (e.g. open thermocouple detection).
- Detection of the quality and presence of input signals (e.g. open thermocouple detection). The quality of each input point shall be determined and classified as either goods, questionable, substituted or bad. When bad, the value shall have bad quality indication
- Surge, over current and reverse polarity protection
- Card failure detection. Each I/O card within the system shall be monitored for proper operation. The system shall alarm indicating the card failure, and the system shall take appropriate safety action, e.g., transfer to manual, etc.
- Individual input shall be fused or feature current limiting. If fuses are provided, a common alarm contact for the fuse failure shall be provided.

Analog input and output signals shall include the following:

- Signal conditioning including linearization, scaling to engineering units, a minimum of 16 bits analog to digital (A/D), and a minimum of 15 bits digital to analog (D/A) conversion
- Analog input channels can be configured for these ranges: 4 to 20 mA, +/-, 10V, +/-, 5V, 0-5V (or) Pt 100 with individual A/D conversion
- Analog output channels can be configured for these ranges Analog output: 4 to 20 mA, +/-10V. Capable of driving 1350 ohms of current and 2K ohms of voltage
- RTD input: Capable of receiving 100 ohms platinum

(c) Turbine Control Unit

The turbine control units shall be by unit control PLC having functions to operate generating set including turbine, generator, governor, digital AVR, valve and related auxiliary equipment and it shall be included functions of turbine controller, synchronizing, electrical protection, control sequence, load set point (MW and MVAR), emergency shutdown functions, etc. and it shall be located in either Control Room or machine room.

(d) Operator Control Station

Each operator control station shall be 32-bit multiprocessor and shall be provided communication ports to the turbine control units and equipped with minimum 4B of RAM, 2 x 1TB HDD (hard disk drive), multilayer DVD writer, 3D graphic VGA card at least 2 GB and sound cards including speaker, and internal latest version of Modem, min. 24 inches WUXGA LCD color monitor with adjustable stand DVI/ DP interface and Ethernet interface cards and other periphery for complete installation to operate generating units and satisfactorily monitoring according to the specifications in this section. Communication to PLC shall be Peer-to-Peer architectures.

In order to supervise the operator to control the units, the Contractor shall provide a real time data to display on LCD monitor of operator station as a minimum of the following items, such as Unit kW, kVAR, energy kWh, Unit Voltage, Current, Frequency, Line current, Line Voltage, Status of all switching devices, status of governor, status of digital AVR exciter, temperatures of generator windings, bearings, battery status, lubricating and governing oil pressure status with temperature, inlet valve position and tail race and reservoir water levels, etc. Database (History) type shall be Industrial Database (non RDB) 64 bits architecture and shall support OPC A&E Collector, OPC DA collector and Redundant Data Collector.

On operator keyboard, it shall be possible to call displays by via of optical mouse. All displays shall be updated at least once every 5 seconds. Response time to an operator command to completely generate or cancel displays shall not be exceeding 1 second. It shall be possible to access any displays by entering a tag name or tag index number. Manual substitutions for input data shall be possible on a point-by-point basis through the operator station.

Group/Faceplate Displays (on LCD monitor) shall be detailed control display for a related group of binary signals, process variables, set point and output indicated by tag name and point text description. The operator shall be able to select point for control action, change the mode of control or set point.

The laptop computer shall be supplied as the engineering work station heavy duty type at least 64-bit multiprocessor; min. 2GB RAM, min. 256 GB SDD (or) 1 TB HDD, multilayer DVD writer, and color LCD display, communication ports to connect and access control modules and equipment such as RS 232, 485, USB 3.0 or IEEE outlets to suit with the communication to all field equipment supplied for this contract.

(e) Local Area Network (LAN) and Interfaces

The local area network shall be a 10/100 base T Ethernet TCP/IP system and switching hub linking the operator control station and turbine control board (PLC). The communication software and licensed shall be included.

The communication between operator control stations and PLCs shall be through local area network (LAN) conform to IEEE 802.3/802.2, 802.1 Q and the protocol shall be complied IEC 60870-5-101/104 standard or equivalent. The communication between CPUs for all control units and Intelligent Electronic Devices (IEDs) such as Digital governor, AVR excitation system, digital protective relaying system, automatic synchronizing unit, digital metering equipment shall be MODBUS (TCP/IP). All status, alarm, condition of the unit and control signals shall be relayed to operator control station through the LAN. The Bidder shall submit the communication system and protocol to be used shall be submitted with the Bid.

Remote Process Input and Output (for future)

Remote process input/ output cards included in PLC cabinet shall be used for collecting the signal for inlet valve (if applicable) or switchgear in case of the equipment is too far from the PLC by via of Remote Ethernet TCP/IP bus from main control center in future but Contractor shall provide all necessary components and PLC communication modules for future purpose.

(f) Protective Relaying System

The protective relaying system shall be an integrated system of IEDs consisting of multi-functional digital relays, high-speed lockout relays, shutdown relays, blocking and test switches and auxiliary relays mounted in one or more cubicles.

Protective Relays

The Protective Relays for the Generator and Line Transformer shall be provided with reliable and longer life protection relay with minimum 5 years warranty directly from the manufacturer to ensure that the quality and reliability of the generating unit are assured.

The protective relays shall be microprocessor-based using digital signal processing technology and software to provide the protection functions, alarms and trip command, fault recording and communication to turbine control board via MODBUS protocol or CAN bus with TCP/IP (for Generator Protection) and RS485 (or) RS232 Port. Each digital relay shall be provided with a port for communication with a laptop computer. The contractor shall design the protection system for generating unit, turbine unit, speed increaser (if applicable), generator transformer, station service transformer, switchgear and others equipment.

Major protective relays for the generating set such as Generator and Transformer Protective relay shall be well proven by the reputable international certification such as: -

- 10 CFR 50 Appendix B Nuclear Quality Program
- ABS Marine Type Approval
- CE (Europe)
- CSA (Canada)
- ENA (UK)
- IEC, including IEC 61850-10 Conformance
- IEEE, including IEEE 1613 Reliability
- ISO 9001:2008
- ISO/IEC 17025
- KEMA
- RUS (for rural electric cooperatives)
- UL
- VPP Star Safety

Each relay system shall be provided with test facilities for secondary injection testing and current circuits, potential circuits, tripping circuits' and all other output contacts. All test switches shall be arranged so that the current transformer secondary circuit cannot be opened circuit in any position while the test plugs or cover plugs are being inserted or removed. Test plugs shall be furnished with each type of test switches. All digital relays shall be adequately protected against damage from incoming surges and shall meet ANSI SWC test standard.

Each relay shall utilize a DC-to-DC converter type regulated power supply to provide high voltage and transient surge isolation between the station battery and the electronic components of the relay system. And each DC-to-DC converter shall be provided two electrically separate contacts for remote annunciation of output voltage failure. Each power supply shall be designed for continuous operation at any voltage from +/- of rated DC voltage and at range of ambient temperature of 10°C to 85°C and 0% to 95% humidity.

All modules of digital type protective relays consist of highly reliable logic circuits and circuit components. All modules shall be mounted on plug-in circuit cards. Wiring boards shall be epoxy-fiberglass construction. Printed circuit wiring shall be employed with soldered or weld connection to circuit components. Wiring board shall be provided with heavy-duty circuit connectors with gold-plated contacts.

The instruction manuals shall be prepared with the object of providing sufficient detailed technical information of each type of protective relay to enable DEDE to efficiently carry out commissioning and routine testing, to provide guidance in the tracing of faults and to permit order of replacement parts. In this regard, each instruction manual shall give full details of circuit operation, circuitry and components. All technical data, operating time curves, sample calculations and other characteristics shall be based upon 50 Hz. Operation.

The settings for the relay functions shall be programmed by via laptop computer using Original Software from manufacturer. And the method of uploading and correction shall be trained to DEDE operator before commercial operation of the plant.

Lock-out and Non-lockout Relays

Lock-out relays shall be high speed half-cycle type, solenoid operated, mechanically latched, with pistol grip manual reset handle. Non-lockout relays shall be similar but without the latch and reset features. Output contacts shall be rated for 2A at 125Vdc. Sufficient contacts shall be supplied for all stated functions.

Auxiliary Relays

Auxiliary relays shall be rail-mounted socket type with sealed case and coils and contacts rated for 125 VDC.

Protection Circuits

Relays and protection circuits shall be rated for 125 VDC and shall be supplied from separate dedicated fused DC circuits. Loss of supply relays shall monitor the supply and shall alarm the control system upon loss of DC. All VTs and CTs circuits shall be supplied with test switches for isolation and tests. In case of the maintenance, cut-off switch shall be provided for circuit protection to ensure that the breaker failure relay (50BF) will not be operated.

Metering

Active and reactive energy metering shall be provided for revenue, statistical and efficiency measurement. High accuracy metering of kWhr and kVARhr are required at control room. Metering shall comply with IEC 60687. Metering test block shall be provided in the CT and VT circuit to provide isolation and testing connection facilities for the meter.

All metering shall be a digital type meter with Ethernet communication and can be recording information and shall be shown on operator control station and shall be print out the information when required. Meters shall have backlit LCD screen for display of quantities and phase vectors, and controls for selection of measured and calculated quantities. Meters used for monitoring distribution line electrical quantities shall be of revenue metering accuracy class. The meters shall include software to allow the control system to perform:

- Waveform capture
- Waveform record harmonic analysis
- Total harmonic distortion (THD) analysis
- Typical history and real time trends

Unit Synchronization

A digital synchronizer shall be supplied to permit manual or automatic synchronizing of the unit(s) output to the PEA grid. The system shall include interfaces with the governor and digital AVR for speed and voltage matching.

The synchronization unit shall include the following:

- Synchronization indicating lights
- Auto/ Manual Synchronizer
- Synchronization check relay (if necessary)

- (g) All electrical devices shall comply with the Standard International Technical Specifications such as IEC or NEMA or JIS standards.
- (h) The Contractor shall use devices whose ratings exceed the rating required by the function and duty of the device in order to increase the reliability of the plant.
- (i) Control, Monitoring & Protection Cabinet Construction

The system shall include Two or more cabinets each for the:

- Unit protection and transformer protection relays, lockout and non-lockout auxiliary relays, and digital multi meters.

- Line protection relays, auxiliary relays, and revenue meter
 - Unit control system, PLC and I/Os
 - Remote I/Os
 - Push Buttons, Switches Annunciators, etc.
- (j) Where possible on electrical devices, the Contractor shall supply one spare contact of each type used.
- (k) Devices shall have adequate range of setting to allow for possible changes during commissioning. The setting shall be readily adjustable and lockable in situ. The Contractor shall provide the DEDE Engineer with revised device setting schedule before the commissioning of plant.
- (4) Solid State Systems
- (a) All solid-state equipment shall be built up from proven modules and components. Unproven equipment will not be accepted and bidders shall include with their bids details of the history of any solid-state equipment offered. Modules performing identical functions shall be designed to be interchangeable. Each module shall have sufficient test points to fault finding and calibration.
- (b) The electronic components used in the modules shall be of the highest quality, having a design in-service life of at least 20 years; this requirement applies particularly to capacitors.
- (c) Indication by means of light emitting diodes or other methods shall be provided on the digital inputs and outputs of solid-state equipment to indicate the logic state. Outputs shall be protected against short-circuits.
- (d) Programmable Solid State System
Control systems employing microprocessors shall have their programs stored in non-volatile and reprogrammable memory. The Contractor shall supply all information and equipment necessary to enable the Department to re-program the control systems.

Following successful commissioning the Contractor shall supply to the Department a complete set of flowchart and program listing plus, if applicable a duplicate set of pre-programmed EPROM's.

The controller shall be equipped with all facilities necessary for the maintenance, operation and fault clearance by technicians with limited knowledge of electronics.

S11.02 CONTROL SYSTEM REQUIREMENTS

(1) Points of Control

- (a) Each valve, switch or other device shall be operable manually for maintenance purposes at the device. If the device is used for isolation purposes, it shall be fitted with provision for padlocking in the isolated position; indication of the device position shall be provided on the device. Electrical or pneumatic operation shall be provided where extended control is also required.
- (b) On the main control switchboard in the control room, control facilities shall be provided for starting, stopping and operational functions such as stopping, excitation, and load control.
- (c) Synchronizing facilities for the units shall be available at the control room on the separate synchronizing panel (or) a unit protection panel. Mimic monitoring diagrams for the control and indication of high voltage equipment shall be fixed on the front panel.

In order to control and monitor the plant in future, the contractor shall provide the spare module of Automation System for the purpose of control from a remote location. The confirmation of this requirement shall be indicated in System Configuration Diagram submitted together with the Bid.


(2) Control Modes and Sequences

- (a) The system shall operate in two main operating modes, which are namely as local and remote (or) PLC operating modes. Operator can operate the generating set from operator control station PC inside control room as Remote Control Mode and operating the Unit from graphical interface HMI Touch Screen at Unit Control PLC namely Local Control mode. The selection shall be done at Unit control PLC Panel. The Contractor shall provide the selector switch on Unit Control PLC Panel as a local/remote selector switch.

The operator shall be able to select one of the following control modes from Operator Control Station PC: -

- | | |
|--------------|---|
| Manual mode: | The unit and associated equipment shall be manually controlled at control panel of each unit. |
| Auto mode: | All unit control sequences shall be carried out automatically once initiated by an operator. |
| Step mode: | The operator shall be able to "step" through each step of the Auto sequences by initiating each step. |

- (b) Unit Control Sequences (UCS) : The UCS shall be capable of executing any control sequences selected and initiated by an operator in all control modes except the manual mode. Once a sequence is initiated, the UCS shall check that all permissive associated with the selected sequence have been satisfied prior to starting the control sequence.
- (c) Stopping shall be possible at any time. Unit emergency shutdown shall positively override any other control sequence to bring the unit safely, independently and quickly to a de-energized and stationary state. Protection system operations and operation of the unit emergency shutdown controls shall initiate a unit emergency shutdown.
- (d) Starting of the unit shall be possible both fully automatically and manually at control board or at the devices.
- (e) Similarly, stopping shall be possible fully automatically and under operator guide control. It shall be possible to restart following commencement of a normal stop sequence without waiting for the stop sequence to be complete.
- (f) The programming sequence shall be a step-by-step as shown on below figure as preliminary for basic information however the Bidder shall indicate clearly for the Start, Stop Sequence, with the process diagram (or) Flow Chart together with the Bid verifying that the Bidder has enough knowledge and capability for performing this project.
- (g) The preliminary sequence for programming PLC will be as below: -

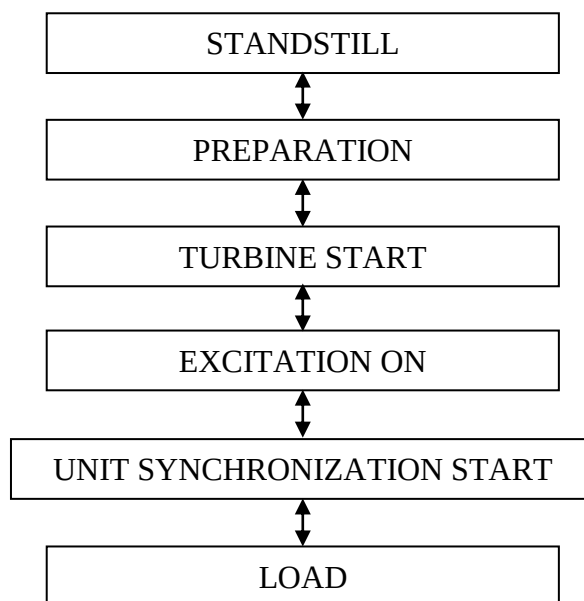

(3) Synchronizing

- (a) The Contractor shall supply both automatic and manual synchronizing facilities to allow the generators to be connected to the power system. The manual equipment shall include duplicate synchrosopes, duplicate synchronizing indication lamps, duplicate reversing transformers, a synchroscope selector switch, running and incoming voltmeters, running and -incoming frequency meter, synchronizing sockets for each circuit plus one spare and keyed synchronizing selection plug.
- (b) The instruments shall be mounted on the main control board in such a position that one operator alone may synchronize effectively.
- (c) A synchronizing check relay shall be provided to supervise the closing of the circuit breaker. This relay shall be put in circuit via the synchronizing selection plug.
- (d) A control signal and indication shall be provided at the end of the starting synchronizing. This signal shall permit the automatic synchronizer to synchronize the unit to the system. The automatic synchronizer shall be put into circuit via the synchronizing selection plug.
- (e) Facilities shall be provided to allow synchronizing to be across either the generator circuit breaker or 22 kV Circuit Breaker.

S11.03 PROTECTION DESIGN REQUIREMENTS

(1) General

- (a) The protection requirements are shown on the single line diagram and equipment details specified herein.
- (b) Each trip relay or tripping circuit shall be separately protected by a fuse or miniature circuit breaker. All trip circuits shall be separately monitored. Protection circuits shall operate at 125 VDC.
- (c) It is operational important that some advance warning of impending trip action is given. This is generally to be achieved by the initiation of a first-stage alarm set to operate before the trip condition is reached: The aim of this is to allow the operator time to take action which will correct the condition or to unload and stop the machine thereby avoiding a shutdown and minimizing damage. In the case of high-speed trip devices, such as overall differential protection relays, no first stage alarm is required.

- (d) Protection devices shall operate either the emergency shutdown or the unit automatic stops latched trip relays. The emergency shutdown relays shall trip the machine off line instantly, shut it down and lock it out of service. The quick stop relay shall delay tripping of the circuit breaker until the unit is at no-load and thereby avoid disturbances to the power system and over speed conditions caused by the rejection of load. The wicket gate and turbine inlet valve shall be tripped immediately, but the circuit breaker shall not be tripped until the unit load is less than 10 percent of full load. A reliable means of signaling the no-load condition shall be used, preferably by means of a direct output from the governor controls. Both trip relays shall also prevent any attempt to restart the unit. The failure of the quick stop sequence shall cause a unit shutdown. Failure of the unit to trip on electrical fault or shutdown shall operate the appropriate circuit-breaker failure protection. It will be necessary for the operator to manually reset trip relays, usually following an investigation in the case of operation.
- (e) The protection scheme shall detect all faults and operate to disconnect plant in a minimum of time to lessen permanent damage. All protection facilities necessary to achieve such a scheme are to be provided by the Contractor.
- (f) The Contractor shall ensure that each protection function is independent of others and can be individually isolated to allow each along to be taken out of service for testing or operational purposes. The Contractor shall provide facilities and equipment for in situ testing of protection systems. Facilities shall be provided in AC circuits to allow disconnection of protection relays and short circuit of current transformers so that testing by secondary injection can be performed. Test terminals shall also be provided in voltage transformer secondary circuits.
- (g) All shutdown and quick stop devices require a fault operation indicator on the protection panel. Electrical protective devices and mechanical protective functions in general will require duplicate, electrically separate initiating contacts; one contact is required for tripping and the other for operating an alarm relay with sufficient contacts to perform the alarm functions plus 1 space normally open contact.

(2) Electrical Protection

The protective systems shall be of solid-state types for Unit and Line Protection, and either Conventional or solid-state type for other protections. The electrical protection scheme is outlined on Drawing except of the excitation system protection, for which only some basic functions have been specified.

Comprehensive electrical protection is required for the excitation system and the Bidder shall provide full details of the proposed scheme with the Bid.

(3) Mechanical Protection and Alarms

The Contractor shall provide all of the devices for protection and alarm shown on drawing together with all necessary piping, valves, fittings and the electrical connections. For initiating devices shown on the drawings as having Stage 1 and Stage 2 settings, the Stage 1 setting shall be set to give an alarm for advance warning of a potentially damaging condition. The Stage 2 setting shall be set to initiate a quick stop of the unit Both Stage 1 and Stage 2 contacts shall be suitable for operation a 125 VDC.

(4) Equipment Details

The Contractor shall submit to the DEDE Engineer for approval, the proposed relay protective system that shall be based on the single line diagram submitted in his BID proposal.

The equipment listed here covers only the devices that are essential for proper operation. It is to be understood that all other associated auxiliary equipment and accessories, although not listed in this Specification, but necessary of the complete and sound functions of the main control board as described in this Specifications, and as generally accepted as the applicable standards, VSPP, shall be furnished by the Contractor.

Unit Protection Relays

- a) Generator Differential Protection (87G): Generator differential relays shall be either a constant percentage or a high impedance differential, 3-element type, and shall provide protection against phase faults for 3 phases and ground faults. The percent differential type or relays shall have a slope characteristic of 10 percent.

Volts/ Hertz (24): The protection element shall have both selectable definite/inverse time characteristic and could be used with a custom curve.

- b) Generator Under voltage Protection (27G): Generator under voltage 50 Hz relay for connection to the 110 V secondary of the voltage transformer on the generator terminals on at least 2 phases.
- c) Generator Reverse Power (32R): Protect Generator against being motored by the Grid, where protection functions include a definite time trip at a pre-defined active power level.

- d) Neutral Over Current (50N): The protection element shall have adjustable pickup current with an adjustable time delay settings. Pickup shall be <1.5 cycles.
- e) Generator Overvoltage Protection (59G): An instantaneous 50 Hz overvoltage relay with compensation for frequency shall be connected to the 110 V secondary of the voltage transformer on the generator terminals. This protection element shall have 2 parts; a low set element with an adjustable time delay setting that closes its contacts on sustained moderate overvoltage and a high-set instantaneous element. The 2 elements shall have adjustable pickup voltage setting range. The low-set element shall have a high ratio at reset to pickup. The low-set and high-set elements shall be used for tripping.
- f) Negative Sequence Protection (46G) - (if applicable): The negative sequence current and one sensitive to the integrated product $(I_2)^2 \times t = 40$. The relays sensitive to the negative sequence current shall be definite time type adjustable within a range of 20-40% of asymmetry and 5 to 15 seconds of operating time. The relays sensitive to the integrated product $(I_2)^2 \times t$ shall be inverse time type.
- g) Over current Ground Relay (51NT) (51NG): The protection element shall be at least two phases, inverse time current characteristics, 5A CT 50 Hz, 0 to 12 A current setting, ICS, 125 VDC, flush mount, adjustable operating time approximately 0.2 to 3 sec.
- h) Non-directional Over current Relay (51G): The protection element shall be at least 2 phase, inverse time current characteristics, 5A CT 50 Hz, 0 to 12 A current setting, flush mount, ICS, 125 VDC.

Loss of Potential (60): The protection element is for detection of open voltage transformer fuses or other conditions that cause of loss of relay secondary voltage input.

- i) Out of Step Protection (78): The protection element is with current supervision and torque control to supervise this function, with mho circle to restrict the coverage of the function to the desired extent.
- j) Rate of Change of Frequency (81R): Protection element detect the changes in frequency either increasing or decreasing frequency and above or below nominal frequency.
- k) Auxiliary Tripping and Lockout Relays (86E, 86M) - (if applicable): Each relay shall be of the high speed, DC voltage operated, manual reset control switch type with cut-off contact provided to interrupt the operating coil.

Number of contacts required shall be 5 electrically separate normally closed contacts and 5 electrical separate normally open contacts. All contacts shall be field interchangeable. Four relays are required.

- l) Under, Normal and over speed relay (12, 13, and 14) for Turbine over speed protection.
- m) Line Protection Relays
 - i. Transformer Differential Protection (87T): The protection element shall be high speed, variable percentage, differential type, and shall provide, protection against phase faults and ground faults. The relays, using the second harmonic restraint principle, shall provide positive protection against tripping on magnetizing inrush current. Relays with 2 restraint windings shall be provided. The relays shall have a variable or an adjustable percentage characteristic of approximately 15 to 60 percent.
 - ii. Non-Directional Overcurrent Relay (50/51F): The non-directional overcurrent protection element shall be at least two phase, moderately inverse-time characteristics, 5A, C.T., 50 Hz, polarizing current of 110 V, 0- to 12-A current setting, flush mount, adjustable operating time approximately 0.2 to 3 sec at ten times current setting, 1 A that is, 125 VDC.
 - iii. Non-Directional Overcurrent Ground Relay (51NF): The non-directional overcurrent ground relays shall be at least one phase, very inverse-time characteristics, 5A, C.T., 50 Hz, polarizing current of 110 V, 0.5- to 2.6
 - iv. -A current setting, flush mount, adjustable operating time approximately 0.05 to 1.7 sec at ten times current setting, 1A, ICS, 125 VDC.
 - v. Current auxiliary Tripping Relays (51X, 51NX) -If applicable: For use with (a) and (b) above. These relays shall be high speed, self reset, 125 VDC, with four independent normally open contacts. The relay shall be designed to draw current at approximately 2.5A for the purpose of dropping ICS target of relays (a) and (b) above. Min. One relay is required.
 - vi. Line Lockout Relay (86LI): One (1 per line) or more as required shall be supplied. The tripping logic and the detailed tripping circuits shall be submitted to the DEDE for approval.

S11.04 GROUP OPERATION INDICATOR

The indicator shall be of the lamp type, which contain two lamps in one window and shall be designed to indicate the sequence of operation of the control board automatically.

S11.05 FAULT INDICATOR AND AUDIBLE ALARM SYSTEM

The fault indicator combined with annunciator relays for alarm shall be used to show the operation of protective relays and items to be indicated shall be referred to the attached Drawings of protective relaying functions. The fault indicator shall be of the lamp type, which contains two lamps in one window.

The audible alarm equipment shall consist of an alarm bell for indicating fault, and shall be mounted inside the control board. The system shall be suited for operation by 125 VDC systems.

Fault indicating sequence shall be as follows:

When a fault occurs, the lamp shall light and flicker, and simultaneously an audible alarm shall be announced.

Manipulating by resetting push button switch shall stop the audible alarm.

Flickering of the lamp shall be stopped by manipulating the resetting push button switch, but the lamp will not go off if the fault continuous. When the fault is cleared the lamp will go off.

Red window indicator shall indicate heavy fault and white window indicator shall indicate heavy fault and white window indicator shall indicate light fault.

S11.06 CONTROL AND PROTECTION CUBICLES

(1) General

The control and protection switchboards shall be designed for control, indication, metering, recording, instrumentation, annunciation and protection according to these Specifications.

(2) Arrangement

The control and protection panels shall be of metal enclosure, free standing with back door for easy access to service and maintenance. Arrangement of auxiliary and related equipment and accessories are not indicated on the Bid drawings but the Contractor shall provide necessary information to complete and proper functions as per this section so that the Bidder shall submit the complete layout of Cubicle arrangement, front panel layout and construction showing the list of Components with the Bid.

Any modifications to the arrangement indicated or arrangement of equipment not shown on the drawings shall be subject to the approval of the DEDE Engineer.

(3) Details of Construction

Each main control panel section shall consist of an assembly made from not less than 3 mm leveled steel sheets and formed steel members as required to form a rigid self-supporting structure. No butt surface joints shall be made on the outside surfaces of the control board. No holes or fasteners shall be visible as viewed from the front of the panel. The control panel shall be designed without any permanent bottom braces and the bottom shall be opened. Each control panel shall be furnished with channel bases. The front and rear panels of the control board shall have bent angle or flanged edges with an outside radius not exceeding 10 mm.

- (a) Control Panel/ Cubicle : The Control and Protection Panel shall consist of basic panel assemblies placed back-to-back at sufficient distance to provide a tunnel-type walkway between the assemblies. Bolted-on floor channels, top sheets, wiring trays, left and right end trims with access doors shall be provided to form a complete duplex control board with uninterrupted walkway running the entering length of the structure. The access doors shall be equipped with lock, latched and fully concealed hinges, and with handles for opening from the exterior and interior. End trims with access doors shall be readily removable so as to permit future boards to be installed at both ends.
- (b) All outgoing wiring and any inter-section wiring shall be routed and terminated to screw type terminal blocks mounted on the interior side panels.

Wiring for control, instrumentation, and relay circuits shall be stranded copper switchboard type with 600 Volt insulation. Minimum wire size

shall be 2.5 mm and for control and annunciation, and 4 mm² for current transformer leads.

All wiring shall be installed in wiring channels and ducts as far as possible. There shall be no splices in the wiring and all connections shall be made at terminal studs or terminal blocks.

Twenty (20) percent spare terminal points shall be provided for future use. All outgoing cable and wire shall be routed through floor openings.

A 20-watt fluorescent light fixture shall be furnished in each board section to provide proper interior illumination. One 3-way switch shall be provide at each end of the board and one 230 VAC, single phase, 3-wire 50 Hz convenience outlet shall be provided for each section. The lighting and outlet circuits shall be wired in conduits and terminated in a suitable junction box at both ends of the boards to facilitate the completion of wiring of the circuit in the field.

A grounding bus made of copper and equivalent to 95 mm² copper conductors shall be provided and fastened securely to the back panel inside of each section. All bus sections shall include provisions to facilitate ground, connection in the field. The extreme end of the ground bus shall have pressure type lugs suitable for 95 mm² copper cable. All grounds in the structure shall be properly routed and terminated to the grounding bus.

All ventilating openings shall be provided with corrosion-resistant screens to prevent entrance of insects and rodents.

To prevent warping of panels, all heavy devices shall be adequately supported by means of rear-mounted brackets or straps. The equipment mounted on the panels shall be arranged and spaced to provide easy access for inspection and servicing.

The board shall be constructed to meet all the applicable sections of NEMA and ANSI Standards.

Switchboard insides and outside surfaces shall be cleaned by rinsing or other suitable method and a rust inhibitor shall be applied prior to priming. The finishing coat shall be the same as main control board.

Terminal boards shall be provided on both side panels with suitable cable supports for incoming control cables.

Wiring between terminals and all relays shall be of the type commonly used in switchboards, with wiring ties at proper intervals.

Terminal markers shall be of the permanent type marker strip and shall bear the wire numbers according to the connection diagrams.

Wiring markers shall be provided on each end of each wire with the same identification appearing on the terminal boards.

Auxiliary self-reset relays shall be multi-contact, high-speed type.

Timing relays shall have adjustable time delay with independent circuit opening and circuit-closing contacts as required. The relays shall not depend on oil despoths or other devices which are affected by temperature.

All relays shall be the surface mounted front connected type with a dust cover. Relays shall be fastened to small channels provided on the surface of the rear panel in each section of the board.

(c) Terminal Block, wire and Device Designations

Every point of terminal block and wire shall be assigned a designation, with identical designation on each corresponding terminal block and wire. This same designation shall also be indicated in the schematic and wiring diagrams. As a rule, a designation will not change until the wire is terminated or connected to other equipment. All wiring shall be designated at both ends by printing on wire designation sleeves. Wire designation shall be by permanent method unaffected by heat, solvents, or steam and not easily dislodged. Each designation on the terminal blocks shall be machine-lettered. Stamped, engraved or neatly marked with permanent ink on the removable marking strips provided for each terminal block. Approximately 20 percent of spare wire designation sleeves shall be furnished. Adhesive labels shall not be acceptable.

The name of NEMA standard device number of each device shall be marked on the rear of the panels directly behind or adjacent to the corresponding device.

(d) Indicating Lamps

All indicating and pilot lamp assemblies shall be of the low power, cool operating, 24 V, switchboard type, with color caps and integrally mounted resistors. The color caps shall be red, green, white, blue or yellow as required. All lamp bulbs shall be inter-changeable and shall be replaceable from the front of the panels.

(e) Test Switches

Test switches shall be of the built-in type or separate type as specified. Separate test switches shall be of the switchboard, back-connected type, finished in dull black for front-of-panel mounting. All test switches shall be arranged to isolate completely the instruments from the instrument transformers and other external circuits and provide means for testing either from an external source of energy or from the instrument transformers by means of multipole test plugs which shall be provided for the propose. A sufficient number of test plugs to make a complete test on one meter, instrument, or relay shall be furnished for each type of test switch. All test switches shall be arranged so that the current transformer secondary circuits cannot be open-circuited in any position while the test plugs or cover plugs are being inserted or removed.

(f) Terminal Blocks

The control boards shall be provided with terminal blocks for termination of all wiring devices mounted in the control boards and all external circuits. Terminal blocks for control wiring shall be of 600 V approved molded-block type with molded insulating barrier between terminals. Terminal blocks shall be sized to accept 25 mm² to 1.5 mm² conductors. Each terminal block shall have movable white marking strip for marking circuit designation. One spare blank marking strip for marking circuit designation and one spare blank marking strip shall be, furnished with each terminal block.

The arrangement of all terminal blocks shall be such that incoming and outgoing can be easily arranged for connection to terminals. Terminal block shall be located so that the accessibility to them will not be lessened by interference from structural members or panel instruments. Ample space shall be provided to terminal blocks for termination of all external circuits. Except as otherwise specified, extra terminals, in addition to that mentioned in Article 10.1, in quantity of riot less than 25 percent of the active terminals, shall be furnished and mounted for circuit modifications and for future use.

(g) Nameplates

Nameplates shall be furnished and mounted by the Contractor. Each assembly, each piece of equipment mounted on an assembly, and each power and control circuit shall be provided with a nameplate. All nameplates shall be of laminated plastic material, black on the surface with a white internal layer. Lettering shall be machine-engraved into the

nameplate to form white letters against a black background. All panel mounted nameplates shall be in accordance with the respective drawing. A sample nameplate, showing the style of engraving to be used, shall be submitted to the DEDE Engineer for approval. Nameplate engraving shall be subject to approval of the DEDE Engineer.

(h) Symbols and Mimic Buses

All symbols, devices and painted mimic buses, 10 mm in width, shall be provided on the main control board to form single line diagrams which will simulate actual electrical connections as indicated on the drawing entitled "Main Control Board Equipment Layout". Mimic disconnect devices for disconnect switches shall be manually operated. The mimic buses shall be painted on the front of the panels with lacquer or enamel. Color of mimic buses shall be as follows:-

22 kV	- RED
3.3 (or) 6.6kV	- RED
0.4 kV	- GREEN

(i) Control and Instrument Switches

The control and instrument switches shall be of the multistage, rotary type, rated 600 V, 20 A, continuous duty, for both AC and DC service, and shall be designed for switchboard mounting with all contact mechanisms behind the panels. All contacts shall be enclosed in a cover, or covers, which can be easily removed when installed on the control board to afford complete accessibility to contacts and terminals. Each contact shall be of the readily renewable, self-cleaning type and shall be of the wipe-type. A rectangular front-of-panel escutcheon plate shall be furnished and engraved showing the switch position of control and instrument switches. The switch identification shall be engraved on the escutcheon plate, or if necessary, on a separate adjacent nameplate furnished by the Contractor.

The types of control switch handles and colors preferred shall be provided as follows:

Circuit breaker control switches	- pistol grip (black)
Instrument selector switches	- round notched (black)
Synchronizing switches	- oval removable (yellow)
Raise-lower control	- oval (black)
Control selector switches	- oval (black)
Other cut-off switches	- oval (black)

The total number of contacts and the total number of contact arrangements shall be adequate for their required functions and shall include two normally open and two normally closed spare contacts.

(j) Indicating Instruments

Each indicating instrument shall be semi-flush mounted, back connected, dustproof, fully tropicalized, switchboard type with a dull black case for mounting on a steel panel. Each shall be suitable for operation with the instrument transformers shown on the drawings under both normal and short circuit conditions.

Except as otherwise specified; all indicating instruments shall be approximately 96 x 96 mm with a 250 scale.

Scale plates shall have a permanent white finish with black graduations and numerals. VAR meter scale plates shall be marked "IN (-)" at the left of the scale, "-0-" at the center and "- (+) OUT" at the right.

Auxiliary transformers shall be furnished where required to produce the correct magnitude and phase angle of measured quantities for the indicating instruments.

The maximum error of each indicating instrument shall not be more than one percent of full-scale range.

(k) Relays

All relay contacts shall be rated to withstand at least 30 A, 600 V for 3 seconds, and at least 5 A, 600 V on continuous duty; All -20 percent to +12 percent of rated DC voltage as specified and at a range of ambient temperatures of 10°C to 50°C. Each protective relay shall be suitable for operation with instrument transformer ratios and connections as shown on the metering and relaying diagrams under both normal and short circuit conditions.

Each electro-mechanical relay shall be of the semi flush-mounted, back-connected, dustproof, fully tropicalized, switchboard type, with dull-back rectangular case and shall have a removable transparent cover, or a cover with a transparent Window, with provision for sealing. Each protective relay shall be the withdrawal type with built-in test facilities. Each relay shall be equipped with an operation-indicating target and contacts for operation of DC voltage rating as specified for each phase, with external front-of switchboard resetting device. Loading resistors-, where needed to secure reliable target operation, shall be furnished.

Static relays shall be supplied as complete relaying system. All relays and components necessary to complete a system shall be fully tropicalized, contained in a common enclosure, and shall be complete with all interconnections and wiring for back-connection. Enclosures shall be rectangular, finished dull-black, dustproof, suitable for semi-flush switchboard mounting, with a removable transparent cover, or a cover with a transparent window, with provision for sealing. Operation indicating lights and identifying labels shall be provided with each relaying system and shall be clearly visible and identifiable. External appearance of the enclosure shall be compatible with cases specified above for electro-mechanical relays. All static relays shall be adequately protected against damage from incoming surges. Each relaying system shall utilize a DC-to-DC converter-type regulated power supply to provide transient surge isolation between the station battery and the electronic components of the relaying system,

All modules of static-type protective relays shall consist of highly reliable logic circuits and circuit components. All modules shall be mounted on plug-in circuit cards. Wiring boards shall be epoxy-fiberglass construction. Printed circuit wiring shall be employed with soldered or welded connections to circuit components. Wiring board shall be provided with heavy-duty circuit connectors with gold-plated contacts.

The stator temperature relay shall be connected to resistance temperature detector and 2 normally open contacts shall be provided and its operation shall be accurate and reliable without wrong-operation. The relay shall be adjustable to operate at temperature of 80° C to 120°C and shall be reset manually.

(I) Auxiliary and Control Relays

Additional auxiliary and control relays shall be used to complete the function of power circuit breaker tripping and reclosing, trouble alarm, or any indication, etc. as required in this Specification.

Auxiliary and control relays shall be of the semi-flush-mounted type if feasible, otherwise of the surface mounted, switchboard type, with a removable cover and transparent window, where applicable, and shall be finished dull black.

The coils of standard-speed relays shall be suitable for continuous duty at their normal operating voltage. All contacts shall be of the renewable type with ample current-carrying and interrupting capacity for the application, and shall withstand at least 30 A, 600 V at 3 seconds and at 5 A, 600 V at

continuous duty. Auxiliary tripping relays of the mechanically latched-in type shall have manual reset- devices operable from the front of the panel by means of a red oval handle and shall have an operating time not to exceed 25 milliseconds. Auxiliary relays of the self-reset, standard-speed type shall have an operating time not to exceed 40 milliseconds. Auxiliary relays of the self-reset, medium speed type shall have an operating time not to exceed 30 milliseconds. Auxiliary relays of the self-reset, high-speed type shall have an operating time not to exceed 15 milliseconds without objectionable contact bounce. All auxiliary relays shall have sufficient number of electrically separate contacts for tripping, lockout and annunciator circuits specified.

(4) Control Sequences, Data Recording, Logging and Report

Unit Control Sequence shall be capable of executing any control sequence selected by operator in all Control Modes except Manual Mode. The design sequence shall be proposed with the Bid including the following steps of sequences: -

- a) Start and Synchronize Sequence
- b) Normal Shutdown Sequence
- c) Emergency Shutdown Sequence

Data Recording, Logging and Reporting in Controller's HMI PC shall be provided with the simultaneously recording and trending up to 6 parameters received by Control System in any define period. The operator shall be able to select the section of interest including the following items: -

- a) Status Alarm and Indication
- b) Audible signals and messages
- c) Alarm logging and Indication
- d) Status alarm List
- e) Trending and Report

S11.07 TESTS

(1) Factory Tests

All control system equipment shall be tested at factory in front of DEDE Engineer and the test program with procedures shall be submitted to DEDE for approval.

In case of Contractor supplies the equipment from other countries, the Contractor shall bare all travelling expenses (air tickets, accommodation, meal, allowance, etc.) for three (3) DEDE Engineers (as Witness) to attend the test at factory and

sign for approval of test results. If there is any defect or rejection of manufactured equipment, the Contractor shall perform the same test at factory again after correction with his own cost.

Factory tests of complete cubicles shall include tests of continuity of all panel wiring, I/O individual functions; Graphical Indication simulation test at HMI PC, all control indications, annunciations and alarm devices, measurement of insulation resistance, etc. The Contractor shall submit the list of test to DEDE Engineer for approval.

(2) Site Tests

The following site tests shall be performed before start-up the unit: -

- (a) Inspect and prove continuity of all control, indication, protection and alarm circuits;
- (b) Test insulation resistance of all circuits, at appropriate voltages.
- (c) Prove correct operation of all control, indication, protection and alarm circuits.
- (d) Prove correct operation of all indicating instruments by secondary injection.

SECTION 12
MAIN TRANSFORMERS

SECTION 12 - MAIN TRANSFORMERS

S12.01 SCOPE OF WORK

The work to be done under this section consists of the design, manufacture, testing, delivery to site, installation, ISO 9001 certificate, TIS standard or PEA standard, placing in successful service and guarantee of Two (2) sets of generator transformers 1,000 kVA.

S12.02 PURPOSE AND FUNCTION

The transformers will step up the generator voltage from 3,300V (nominal) step-up to the transmission line voltage of 22 kV (nominal). Each transformer will transfer power from a generator of rated for 1,000 kVA, 0.8 P.F, 3 Phase and 50 Hz. The generators will be star-connected and grounded through a resistor.

The layout and component list with dimensional drawings for transformer shall be submitted with the Bid.

S12.03 STANDARDS

The transformers shall be manufactured and tested in accordance with the latest TIS 384, JEC 204, VDE and DIN, or equivalent; unless otherwise specified in these specification HV and LV bushing shall be in accordance with the latest DIN 42531 and DIN 42530 respective, or equivalent; unless otherwise specification.

S12.04 TYPE OF TRANSFORMER

The transformers shall be 3-phase, 50 Hz, two windings, outdoor type OA (oil-immersed, natural air cooled circulation), and Hermetically Sealed corrugated tank (or) Conservator Tank with self-standing on concrete platform.

S12.05 MEGAVOLT AMPERE RATING

The continuous rating shall be 1,000 kVA, based on an average copper temperature rise of 60°C and hottest spot of 75°C over an Ambient maximum temperature of 45°C. Thermally upgraded paper shall be used.

S12.06 VOLTAGE RATINGS, CONNECTIONS AND TAPS

The high voltage winding shall be Delta connected with a solidly grounded neutral for operation at 22 kV, line-to-line, and shall be equipped with 4 full capacity, off-load taps at ± 2.5 percent, ± 5.0 percent based on 22 kV.

The low voltage winding shall be star connected for operation at 3.3 kV.
 All voltages are based on the turn ratio of the transformer at no load.

S12.07 INSULATION LEVELS

The Insulation level of HV windings and connected parts of transformers shall be as follows:-

Nominal System Voltage (kV, rms)	Insulation	
	Impulse Test Voltage Full-wave (kV, peak)	Power Frequency Test Voltage, 1-min (kV, rms)
22	125	50

S12.08 IMPEDANCE AND LOSSES

The percentage impedance shall be 6.0 percent at 75°C, based on 1,000 kVA and rated voltage. No-load losses and load losses shall be according to PEA standard.

S12.09 SHORT CIRCUIT CAPABILITY

When connected for normal, full-load operation, the transformers shall be capable of withstanding, without injury, a 3-phase short circuit on the terminal of any winding for duration of 2 seconds. It shall be assumed that rated voltage shall be maintained behind the reactance of system and generators.

S12.10 SOUND LEVEL

The transformers shall be designed to operate without exceeding the average sound levels prescribed by NEMA TR 1.

S12.11 HIGH FREQUENCY INTERFERENCE

The transformers shall be designed to operate without causing interference directly or indirectly to television reception and telephone communication circuits, and shall not cause radio interference in excess of the suggested tolerance limits of NEMA TR 1.

S12.12 BUSHINGS AND CONNECTORS

The transformers shall have the high voltage and low voltage leads brought out from the tank through bushings best suited for the voltage of the winding and with a high factor of safety.

Outdoor bushings shall be in accordance with ANSI C76.1 and shall be rated as follows:-

Bushing	Impulse Full-wave (kV, peak)	Low-Frequency (kV, rms)	
		Dry 1-min	Wet 10-sec
HV. Bushing for 22 kV system	125	50	50
LV. Bushing	40	10	10

Suitable connectors for bus, etc., shall be supplied, with all bushings, subject to the DEDE Engineer's approval.

Neutral bushings will be connected to a copper bus or copper conductor. There shall be no connection of the neutral lead to the inside of the tank.

Bushing arrangements, stud dimensions and connectors shall be subject to the approval of the DEDE Engineer.

All bushings shall be designed to eliminate harmful stressing of any parts due to temperature changes and to provide for conductor expansion. All porcelain used in the bushings shall be homogeneous, free from laminations, cavities or dielectric quality. The glazing shall be uniform in color and free from blisters, burns and other defects. All porcelain parts shall be one piece, well vitrified, tough and impervious to moisture.

S12.13 OFF-LOAD TAP CHANGER

Each transformer shall be equipped with a full mega voltage ampere capacity off-load tap switch. The tap changer shall include operating wheel or handle, indicating pointer and dial, and means for locking in any desired position. The locking device shall be arranged to prevent locking the tap switch in an intermediate position. The tap switch position indicator shall be visible from ground level while operating the tap switch. The tap switch shall provide 4 full capacity 2-1/2 percent voltage adjusting steps-2 above and 2 below the 22 kV voltage.

The complete tap changing mechanism shall be built to meet all operating conditions and shall have high electrical, mechanical and thermal safety factors to withstand the full short circuit current of the transformer without damage. The switch contacts shall be silver-plated.

S12.14 CONSTRUCTION

The core shall be manufactured of high-grade, grain-oriented, nonaging sheet steel laminations having smooth surfaces. The core steel and all insulation associated with the core shall be designed so that no detrimental changes in physical or electrical properties will occur during the life of the windings.

The laminations of core type transformers shall be glass tape wrapped or bolted. Core bolt insulation shall be suitable for 130°C (Class B) minimum.

The core stack shall be grounded internally through grounding links located on top of the core to permit testing of the individual core packages for grounds.

The core steel and windings shall be suitably braced to prevent displacement or distortion during transportation and conditioned for permissible short circuit and overload. Suitable lifting attachments shall be provided for untanking the core and coils with a minimum of headroom. The design and location of lifting points shall be such as to preclude distortion of the core or damage to the core bolt insulation under lifting stresses. Lifting stress shall not be transferred between top and bottom clamps through the core iron.

All windings shall be copper. The winding insulation materials throughout shall be thermally upgraded and shall be 105°C (Class A) or higher.

Non-brazed electrical connections shall be compression type, 2-bolt connectors.

All fabricated steel shall be free from distortion and constructed according to the approved Drawings.

All oil-filled compartments mounted on the side of the main tank shall have a 12 - mm minimum raised lip to prevent dripping of oil with the covers removed.

To maintain oil tightness, gasketed joints shall be designed and constructed to ensure even and effective pressure without overstressing the gasket, even under conditions experienced during vacuum filling of the main tank. When installed in position, the outer edges shall be protected by metal-to-metal stops or fire-resistant stop gasket material.

A relief vent shall be mounted on the cover adjacent to and projected beyond the expansion tank, discharging at a level above it. A sealed diaphragm shall be installed in both the top and bottom of the vent. The vent shall be equipped with a screen to prevent fragments of ruptured diaphragm from entering the transformer. The vents shall have the highest point not less than the height of their conservators and shall be designed to have the vent outlets face towards the ground with this height approximately 50 cm above ground level in order to protect splash over of oil in case the pressure relief device is operated. The pressure relief vents shall be equipped with alarm contacts.

Two ground pads shall be fitted at diagonally opposite corners of the base. Each pad shall include a clamp type terminal and bolts suitable for a 95 mm² stranded cable. Bolt holes in the pads shall be 35 mm deep.

A ladder shall be located on the side of the transformer tank for climbing onto the transformer. It shall extend from the base of the transformer to a minimum of 0.50 m above the cover, with an adjacent handhold to assist in moving from ladder to cover. The lower part of the ladder shall be equipped with a barrier and locking device to prevent its use by unauthorized personnel.

S12.15 BASE

The base shall be designed to permit moving the assembled and oil-filled transformers on skid plates or rollers. Length and spacing of each pair of reinforced parallel rolling areas shall be such that the fully assembled transformers, with or without oil, can be safely tilted 15 deg. Internal reinforcing shall not prevent draining of all liquid from the tank.

The transformers shall be provided with fixed structural steel skids suitable for skidding or rolling the transformers in any direction. Eyes for attaching hauling equipment shall be supplied on each side of the transformer, so that the transformer may be hauled in all four directions relative to the transformer tank. Location of the eyes shall be approved by the Engineer.

S12.16 TRANSFORMER TANK OR CORRUGATED TANK

The transformer tank and assembled radiators, the conservator tank, shall be suitable for filling with oil in the field under a vacuum of 1 atm. The completely assembled transformer with oil shall withstand a pressure of 1.00 kg/cm² or 125 percent of maximum operating pressure measured at the elevation of the cores.

S12.17 CONSERVATOR TANK (If selected)

A conservator tank shall be mounted above the radiator bank. The tank shall have a minimum capacity of 10 percent of the oil volume of the transformer tank and cooling system and shall be suitable for operating under vacuum. It shall be equipped with dehydrating breather, accessible from grade level and designed to permit capping, a 50mm valve with plug at the top of the tank, a sump and 25mm drain valve at the lower end of the tank, and a manhole for inspection and cleaning. The connecting pipe to the main tank shall be 50 mm diameter minimum and shall project at least 25 mm inside the expansion tank. A brass gate valve of the rising stem type with a handle which clearly indicates the position of the valve gate shall also be provided.

S12.18 RADIATORS OR CORRUGATED TANK

The transformer shall be provided with a sufficient number of radiators to permit operation at the self-cooled ratings without exceeding the specified temperature rise.

Radiators shall be mounted on the transformer tank or corrugated tank.

Radiator valves shall be provided on each radiator connection to the interconnecting pipe, so that any radiator may be removed for repairs without taking the transformer out of service. Not required for hermetically sealed type transformer.

Radiators shall be equipped with provisions for draining.

S12.19 CONTROL

Suitable terminal blocks with a minimum of 20 percent spare quantity shall be provided to accommodate all wiring and cables.

All conduit and wiring between each item of equipment and the main control cabinet shall be provided.

S12.20 OIL

A sufficient quantity of oil shall be supplied in drums with 10 percent extra to allow for spillage. The oil shall have a dielectric strength, when shipped, of at least 30 kV as measured in accordance with ANSI specifications. The oil shall be mineral oil complying with the latest ANSI standard on insulating oils. Three certified copies of test reports stating the dielectric strength of the oil shall be supplied to the Administration prior to energizing the transformer.

S12.21 ACCESSORIES

The transformers shall be furnished and equipped with the following accessories:

- (1) HV and LV bushings, with terminal connectors
- (2) Bird guard cap (bushing cover), ultra-violet and track resistant material, e.g. polypropylene, neoprene, etc; which is suitable for exposure to sunlight
- (3) Arcing horns, corrosion-proof, according to DIN 42531
- (4) Tap changer
- (5) Thermometer pocket with 2 contacts
- (6) Nameplate with connection diagram
- (7) Oil drain valve with plug or cup, installed at the lower part of the tank
- (8) Sludge drain plug, installed at the bottom of the tank
- (9) Earthing terminal, with solderless clamp type connector suitable for steel stranded conductor diameter of 9.0 mm (size 50 mm²); complete with lock washer of stainless steel or better
- (10) Lifting lugs
- (11) Lifting eyes on the cover
- (12) Oil conservator with dehydrating breather and oil level gauge with contacts.

The cylinder of dehydrating breather shall be of transparent glass. The dehydrating breather shall be easily replaced and filled with silica-gel not less than 1.0 kg. Not required for hermetically sealed type transformer.

S12.22 TESTS

The transformers shall be tested at the Contractor's works in accordance with ANSI C57.12.90. The following tests shall be made on the transformer.

Routine test

- (1) Resistance of high and low voltage windings on all taps.

- (2) Exciting current and no-load loss on rated voltage connections at rated voltage and 110 percent of rated voltage (to be performed after impulse test).
- (3) Impedance and load test at rated current on the rated voltage connection and on the tap extremes (1 transformer only for tap extremes)
- (4) Polarity and phase relationship tests
- (5) Ratio of all taps
- (6) Control components and auxiliary wiring tests. Where applicable, tests shall be performed on each transformer in accordance with the relevant standards:
 - Dielectric
 - Oil dielectric strength
 - Applied and Induced voltage tests

SECTION 13
LINE PROTECTION EQUIPMENT

SECTION 13 – LINE PROTECTION EQUIPMENT

S13.01 SCOPE OF WORK

The works to be done under this section consist of design, manufacture, supply, testing and delivery to site with installation and guarantee for: -

- 9 (nine) sets of 22 kV Drop Out Fuse for Generator Outgoing Lines
- 1 (one) set of 3 Phase Disconnecting Switch for 22 kV PEA Outgoing Line
- 3 (three) sets of 22 kV Voltage transformer (Epoxy Dry Cast Resin indoor)
- 3 (three) sets of 22 kV Current transformer (Epoxy Dry Cast Resin indoor)
- 1 (one) set of SF6 or Vacuum circuit breaker
- 1 (one) set of Recloser
- 6 (six) sets of Lightning arrester
- 1 (one) set of 22 kV Line protection cubicle
- 4 (four) sets of 22 kV Switchgear cubicle
- 4 (four) Concrete Pole 12 meters

S13.02 PURPOSE AND FUNCTION

The SF6 circuit breaker (or Vacuum circuit breaker) and Recloser shall conduct electrical power from powerhouse to 22 kV PEA transmission line via 22 kV Disconnecting Switch (3 Poles). This specification covers the requirements for motor operated remote controlled, three phase, SF6 circuit breaker (or Vacuum circuit breaker) and Recloser which shall be operated by remote command from SCADA PLC from Operator Control Room.

The SF6 circuit breaker (or Vacuum circuit breaker) shall be indoor type and 22 kV recloser shall be outdoor type and the manufacturer shall be ISO 9001 and ISO 14001 certified.

S13.03 DESIGN AND APPLICABLE STANDARDS

The other line protection equipment shall be designed, manufactured, and tested as according to the latest version of ANSI, NEMA or IEC standards. Certified type test reports shall be provided.

S13.04 EQUIPMENT RATINGS

All equipment in this section shall comply with IEC, NEMA, ANSI or equivalent and they shall have the ratings as below:

- (1) 22 kV Recloser, pole mounted outdoor type, minimum 22 kV, 800 A, 31.5 kA with control panel and outdoor enclosure

- (2) 22 kV SF6 Circuit breaker (or Vacuum circuit breaker), indoor type, 22 kV, 2,500 A, 31.5 kA, installed in 22 kV switchgear cubicle
- (3) 22 kV Disconnecting switch, outdoor type, 3 poles, 600 A, 12 kA
- (4) Lightning arrester, indoor type, 21 kV, 10 kA, installed in 22 kV switchgear cubicle
- (5) 22 kV Current transformer, 200/5/5 A, Epoxy Dry Cast Resin indoor type, installed in 22 kV switchgear cubicle
- (6) 22 kV Voltage transformer, 200/5/5 A, Epoxy Dry Cast Resin indoor type, installed in 22 kV switchgear cubicle
- (7) 22 kV drop-out fuse cutout 100A, outdoor pole mounted type
- (8) 1 (one) set of 22 kV line protection cubicle shall be the same specifications as per generator protection in section 11 having line protective function according to main single line diagram. Equipment shall be protected against electrical and electro-magnetic disturbance and shall particularly comply with IEC 60255-5 and IEC 60255-22 standards. Metering and Protective Relays shall be selected and comply with the latest PEA Standards and regulations.

S13.05 DETAILED REQUIREMENTS

The 22 kV switchyard equipment, metering and protection system shall meet the requirements and shall comply with the standards and protection system shall be complied and approved by DEDE and PEA.

The contractor shall design the 22 kV line protection system and metering system which is to be installed in switchyard according to the well proven associations by the reputable international certification such as: -

- 10 CFR 50 Appendix B Nuclear Quality Program
- ABS Marine Type Approval
- CE (Europe)
- CSA (Canada)
- ENA (UK)
- IEC, including IEC 61850-10 Conformance
- IEEE, including IEEE 1613 Reliability
- ISO 9001:2008
- ISO/IEC 17025
- KEMA
- RUS (for rural electric cooperatives)
- UL
- VPP Star Safety

Each relay system shall be provided with test facilities for secondary injection testing and current circuits, potential circuits, tripping circuits' and all other output contacts. All test switches shall be arranged so that the current transformer secondary circuit cannot be opened circuit in any position while the test plugs or cover plugs are being inserted or removed. Test

plugs shall be furnished with each type of test switches. All digital relays shall be adequately protected against damage from incoming surges and shall meet ANSI SWC test standard.

All modules of digital type protective relays consist of highly reliable logic circuits and circuit components. All modules shall be mounted on plug-in circuit cards. Wiring boards shall be epoxy-fiberglass construction. Printed circuit wiring shall be employed with soldered or weld connection to circuit components. Wiring board shall be provided with heavy-duty circuit connectors with gold-plated contacts.

The instruction manuals shall be prepared with the object of providing sufficient detailed technical information of each type of protective relay to enable DEDE to efficiently carry out commissioning and routine testing, to provide guidance in the tracing of faults and to permit order of replacement parts. In this regard, each instruction manual shall give full details of circuit operation, circuitry and components. All technical data, operating time curves, sample calculations and other characteristics shall be based upon 50 Hz Operation.

The settings for the relay functions shall be programmed by via software from laptop and it shall also be approved by PEA for setting values. And the method of parameter uploading, and correction shall be trained to DEDE operator before commercial operation of the plant.

Lock-out and Non-lockout Relays

Lock-out relays shall be microprocessor based high speed half-cycle type, solenoid operated, mechanically latched. Non- lockout relays shall be similar but without the latch and reset features. Output contacts shall be provided at 125 VDC. Sufficient contacts shall be supplied for all stated functions.

Auxiliary Relays

Auxiliary relays shall be rail-mounted socket type with sealed case and coils and contacts rated for 24 and 125 VDC.

Protection Circuits

All relay protection circuits for 22 kV line equipment shall be by 125 VDC and shall be supplied from separate dedicated fused DC station service. Loss of supply relays shall monitor the supply and shall alarm the control system upon loss of DC. All VTs and CTs circuits shall be supplied with test switches for isolation and tests at 22 kV Line Protection Cubicle.

Metering

Active and reactive energy metering shall be provided for revenue, statistical and efficiency measurement. High accuracy metering of kWh and kVARh are required at control

room and it shall be connected to SCADA PLC via RS 485 or Ethernet TCP/IP cable. Metering shall comply with IEC 60687. Metering test block shall be provided in the CT and VT circuit to provide isolation and testing connection facilities for the meter.

All metering shall be a digital type meter with RS 485 or Ethernet TCP/IP communication and can be recording information and shall be read from SCADA System and shown at HMI LCD monitor screen at operator control station and shall be printed out the data logging, alarm list, metering values and other information. Meters shall have a backlit LCD screen for display of quantities and phase vectors, and controls for selection of measured and calculated quantities. Meters used for monitoring distribution line electrical quantities shall be of revenue metering accuracy class. The meters shall include software to allow the control system to perform:

- Waveform capture
- Waveform record harmonic analysis
- Total harmonic distortion (THD) analysis
- Typical history and real time trends

Wiring and Testing

The Contractor shall supply, before elaborating the wiring diagrams, block diagrams in one drawing for each type of feeder protection. These block diagrams shall include schematic information concerning trip circuits, control circuits, secondary circuits of voltage and current transformers with polarity marks, DC power supply, supervisory alarms, and annunciation. These block diagrams shall be updated during the factory test, erection and commissioning phases.

Cable and Wire used inside the panel shall conform to IEC standards.

The only work necessary to be performed at site shall be the connection of the external devices, the commissioning procedures, and the site tests.

Test devices shall be provided for relay test facilities. Each test device shall be furnished with each relay and arranged to isolate completely the relay from instrument transformers and other external source of energy or from instrument transformers by means of multipole test plugs which shall be provided for the purpose. A sufficient of number of test plugs to make a complete test on one relay shall be furnished for each type of test device. All test devices shall be arranged so that the current-transformer secondary circuits cannot be open-circuited in any position while test plugs are being inserted or removed.

It shall be possible to perform complete test of a protective relay, interposing relays, if any, and circuit breaker by injection of analogue values through the test blocks, without disconnecting any wire or connector.

Interface Requirements

The protection scheme(s) shall include all hardware and software to allow remote setting/configuration/fault analysis from:

- From a remote access from SCADA system for monitoring and recording data from Meters and Relays
- Laptop as Engineering Station with a direct link via communication cable for Meters and Relays

The main requirements applicable for communication between PLC and the relay shall be the followings:

- Relay Settings
- Relay Configuration (I/Os, programmable scheme logic, fault recording programming)
- Switching of setting group
- Extract disturbance records
- Access to relay monitored parameters

Access to relay display and setting parameters will be keyed by different authorization levels (password).

S13.06 DEDICATED PROTECTION

In addition to dedicated protection devices described below, auxiliary tripping relays and auxiliary tripping and lockout relays shall be provided with line protection.

Each auxiliary tripping and lockout relay shall be of the high-speed type, DC voltage operated, electrical reset with cut-off contact provided to interrupt the operating coil. All contacts shall be electrically separate contacts and rated to carry 30A, 300V, for 3 seconds, 5A, 300V, continuous, and be capable of interrupting of 0.2A of inductive current ($L/R \leq 40$ ms) in a 125 V DC control circuit.

Loss of DC control circuit shall be monitored by loss-of-potentiala DC alarm relay. Each relay shall be provided with an auxiliary relay, standard speed with slow dropout characteristics.

Similarly, loss-of-AC control supply shall also be monitored by a loss-of alarm relay. Each relay shall also provide the contacts for alarms like loss-of-DC alarm relay.

S13.07 LINE PROTECTION

The line protection relay shall be a high-speed numerical type microprocessor based. The provided protection functions shall be followed PEA standards and meet the requirements of PEA line protection. This numerical relay is the basic device in each unit connection scheme.

SECTION 14
COMMUNICATION SYSTEM

S14.01 SCOPE OF WORK

(1) Number of PC required	One (1) Set
---------------------------	-------------

- a) 24" Monitor with display output
- b) Main Board (Mother board)
- c) Hard Disk Drive
- d) Graphic VGA Card with display outputs
- e) RAM Cards
- f) Power Supply Module
- g) PC Casing with Ventilation Fans
- h) Ethernet Card (LAN Card)
- i) DVD/R-W Combo set
- j) HDMI Port (in/out)
- k) USB Ports (3.0 and 2.0)
- l) Serial, Parallel, PS/2 Ports
- m) Optical Mouse (wired or wireless)
- n) Keyboard
- o) PC Table and Chair
- p) LAN Cable
- q) Accessories

S14.02 PURPOSE, TECHNICAL SPECIFICATIONS, AND PERFORMANCE REQUIREMENTS

The purpose of this requirement is for the communication between SCADA PLC inside Control Room and other powerhouse facilities to record control and monitor all plant parameters of the supplied equipment under this contract so that Operator can monitor and control from control room.

(2) Technical Specifications and Performance

Type:	Indoor, mounted on PC Table
Operating System	Window 10 Professional (or) compatible to SCADA program
Number of PC	One (1) Set
Power Supply	230Vac, single phase
Back-Up Power	UPS for minimum 15 minutes
Processor	Intel Core i7 - 64 bit
Processor Speed	3 GHz (minimum)
HDD	1 + 1 TB (minimum)
Power Supply Unit	500W (minimum)
RAM Card	16 GB (minimum)
VGA Card	4 GB (minimum)
Ethernet Card	1 Set
Ethernet Protocol	IEEE 802.3, TCP/IP protocol
Switching Hub	1 ea. (minimum 8 ports)
DVD/R-W Combo set	1 ea.
Serial, Parallel, PS/2 Ports	1 Lot (min 1 Port for each type)
USB 3.0 Ports	2 Ports (min)
Primary Powers Supply	230 Vac., 50 Hz
Back-Up Power Supply	UPS 230Vac (or) Inverter 230Vac
Mode of Control	Monitoring and Control
Standard Applied	IEEE, IEC, UL, ANSI, NEMA

(3) Accessories: The following accessories shall be supplied for each station: -

a. Monitor 24"	1 ea
b. Mouse	1 ea. Optical (wire or wireless)
c. Keyboard	1 ea. 108 key (Thai & English)
d. PC Table	1 ea
e. Operator Chair	1 ea. adjustable for height with wheels
f. UPS	1 Unit (for 15-minute time, minimum 600VA)
g. Printer	1 Set (A4-Laser Color Printer)
h. Other	Cables, extension cord 230Vac, 10A

The Bidder shall submit Manufacturer's literatures such as catalogues and technical information of PC, Monitor, Software and Main Components including License software information with the Bid.

S14.03 SCADA SYSTEM

(1) General

The purpose of this requirement is for the communication system to control and monitor the Generating Units and all other related equipment in the plant supplied under this contract so that DEDE Operator can monitor and control the plant.

The SCADA system is connected directly via Ethernet to Governor PLC, AVR, Protection Relay and other control module to monitor and control for this reason it is possible to operate the whole plant with the SCADA system.

All-important activities and recording faults shall be stored and in HMI PLC shall be saved for one month. It can be possible to make a data export and generate CSV-files. The displayed is English.

The operator interface software, herein described as the HMI (Human Machine Interface), shall be an integrated package for developing and running automation applications and it shall be designed for use in latest Microsoft® Operating System. It shall use COM, ODBC, OPC, and ActiveX technologies for optimal performance and integration with other software systems.

The licensing of HMI Software should be unlimited Tags.

HMI shall provide a common way to define and authorize secured actions on resources for a set of users or groups and locations and it shall allow for seamless integration and interoperability with Automation Controllers to allow for sharing of tag data without duplication of tag databases and other functionality.

The system shall provide the ability to design high-level graphics for complex applications either by using its own drawing editor or by importing graphic files from other drawing packages such as AutoCAD®, Corel DRAW® and Photoshop TM. Specifically, the HMI shall allow importing of the following file formats: wmf, .clp, .bmp, .tif, .gif, .pcx, and .jpeg. It shall also include, but not be limited to, the following graphic object animations: position, rotation, size, visibility, color, fill, slider, and touch.

The system shall be able to integrate Microsoft Visual Basic for Applications (VBA) as a built-in scripting language to customize and extend applications. The HMI must adopt Microsoft's Component Object Model (COM) and implement COM technology as a means of exposing open application interfaces to external applications, such as Microsoft Visual Basic (VB). VBA scripting will handle graphics like the way forms and other graphics are handled in VB. This will allow for

access to all the events, methods and properties of graphical objects and ActiveX controls in the HMI.

- Shall support directly referencing the tag in the controller. This eliminates the need to create an HMI tag and greatly reduces the amount of configuration that is required.
- Shall have the ability to modify the tag database while a project is running. That is, it shall be possible to add a tag in the run mode to the database (with alarming, data logging, and displays all active) without stopping the project.
- Shall allow linking the appearance and behavior of a graphic object to multiple copies of that object in the same application to help develop and maintain repetitive objects more easily. When changes are made to the base objects, the copies shall be changed accordingly.
- Shall be based on standards that allow the HMI's data to be accessed, shared among, and be fully interoperable with other Windows applications.
- HMI's graphic displays shall be containers for ActiveX controls and be able to access the controls' methods, properties and events via VBA scripting.
- Shall log all data in files in an ODBC database for easy retrieval in other programs such as Microsoft Excel.
- HMI's database editor shall allow browsing the ladder/control scheme documentation for direct tag import. This capability shall consist of a wizard that enables on-the-fly tag creation without recompiling.

(2) Security

Security shall use the following policies to define system-wide rules that govern how security is implemented:

System Policies:

- Security policies – define general security rules
- Audit policies – define what security-related information is audited while the system is in use
- User Rights Assignment policies – define which users can access features
- Health Monitoring parameters – define application wide settings to tune the application and accommodate network issues for a distributed system.

Product Policies: sets of securable features for the individual products in the system.

HMI Security shall provide a common way to define and authorize secured actions on resources for a set of users or user groups and locations.

The security system shall use the Windows security system. This will closely integrate the overall system security model.

The security system shall allow the use of Windows user accounts and groups. This enables users to be added and removed from the Windows user groups without changing the HMI application.

(3) Alarm

- The alarm system shall have the ability to monitor any analog or digital tag for alarms. The alarm system database must allow up to 40,000 analog or digital alarm tags per HMI server.
- The alarm system shall have the ability to define up to eight different severity classes to visually distinguish alarms.
- The alarm system shall have the ability to create alarm log files periodically, at specified times, and on event. The alarm log system shall have the ability to automatically purge old files after a specified time.
- The alarm system shall allow online export of an alarm log file to the following ODBC format databases:
 - a) Microsoft Access
 - b) Oracle
 - c) Microsoft SQL Server

The alarm system shall have a minimum of eight alarm thresholds capable of dynamically changing during run time via tags. The alarm system shall be able to generate alarms on an increasing threshold, decreasing threshold, or both. It must be possible to disable alarm generation when approaching normal operating range.

(4) Remote Monitoring with Web-based HMI clients

-
- HMI shall support fully scalable and animated web displays of existing HMI applications from the office, home, or on the road via an internet browser.
- HMI shall provide support for multiple browsers including Internet Explorer and Firefox.
- The remote thin client shall be an internet browser without the need for an additional client software installation.
- The Remote Client should be based on HTML5.
- It shall support multiple concurrent thick and thin-client connections.

(5) The Screened image shall be included the followings as minimum:

- Overview image
- Images with turbine, generator data with bearing, winding, levels, pressure, etc.
- Set point parameters and limiting values for each unit

- Single Line of the whole plant with activating connection graphic
- Event list and Log for each activities of equipment time by time
- All faults, alarms and trip events shall be recorded.

(6) All HMI PC shall be equipped and installed the following: -

- WinCC Runtime professional V13 (2048 TAGs)
- Microsoft Windows 10 Professional (or) higher compatible with SCADA program
- Remote Maintenance software
- Anti-Virus Program (Licensed 1 year)

SECTION 15
GROUNDING SYSTEM

SECTION 15 - GROUNDING SYSTEM

S15.01 SCOPE OF WORK

The work to be done under this section consist of the design, manufacture, testing and installation of Grounding system in the Powerhouse and the transformer switchyard.

S15.02 GROUNDING WORKS

All metal parts such as steel structures, turbine casing, and all electrical equipment supplied by the Contractor including cable racks and conduits shall be connected to the ground mesh.

The Contractor shall design the grounding system, after studying of soil receptivity and maximum ground fault. The calculation shall be submitted to the Department. for approval.

The ground mesh shall be designed to keep total potential rise in the project area, step and touch voltages within allowable values during ground fault.

The actual ground resistance shall be measured after the ground mesh is installed.

SECTION 16
ELECTRICAL AUXILIARY EQUIPMENT

SECTION 16 - ELECTRICAL AUXILIARY EQUIPMENT

S16.01 SCOPE OF WORK

The work to be done under this section consists of the design, manufacture, testing deliver to site, installation, commissioning and the guarantee of electrical auxiliary equipment within the powerhouse and related structures. The scope includes all engineering, materials and equipment required for the Works.

S16.02 WORK INCLUDED

The equipment covered under this section includes:

- cable trays and supports
- conduit, boxes and fittings
- HV cable
- 750 V wire and cable
- control cable
- station clocks
- motor control center
- Surge tank water level transmitter

S16.03 CODES AND STANDARD

All materials, equipment and methods of work shall comply with the latest edition of applicable laws, codes and standards listed in this contract.

S16.04 CABLE TRAYS AND SUPPORTS

Cable trays complete with support system, fittings, barriers hardware, etc., shall be provided to facilitate and support of power, control and metering cables.

Cable trays shall be made of aluminum or galvanized steel. Sections of tray shall consist of a 1-piece corrugated, ventilated bottom contained within longitudinal side members supplied in convenient lengths. Elbows, tees, bends, etc., shall be of similar construction. Tray connectors shall provide a grounding path between tray connectors shall provide a grounding path between tray sections. The complete tray system shall provide a smooth surface free of sharp protrusions or nicks which could damage cables. Where cable trays are positioned so that cables may be subject to damage from above, ventilated covers shall be provided.

Trays shall be supported by suitable structural steel frames, brackets, rods, etc., as applicable, secured by concrete inserts to be provided in cable trenches. Distance between supports shall not exceed 2.6 m. The maximum deflection for fully loaded trays, midway between supports, shall not exceed 5 mm.

Power and control/metering cables shall be installed in separate trays to the degree practical, and in instances where combined, a solid dividing barrier shall be provided. Power cables shall be similarly divided with respect to voltage.

S16.05 CONDUIT, BOXES AND FITTINGS

Conduit, embedded in concrete and exposed, shall be provided to facilitate the installation of all conductors, cables and wires not contained in the cable tray system. Conduit shall be provided where the cable in the tray would be subject to damage and also provided from the cable tray system to motors, push buttons, control equipment, etc.

All conduit shall be rigid heavy wall, galvanized steel according to ANSI C80.1 with threaded joints. Minimum size shall be 25-mm. inside diameter for embedded conduit and 20-mm inside diameter for exposed conduit.

Where conduit is to be installed in concrete structures, all joints or connections shall be watertight, each joint being painted with red lead paint and allowed to dry before being encased. Where services are concealed within an enclosure, the conduits shall be neatly arranged and coordinated with other service pipes.

Conduit runs which are exposed, or are run in open ceiling spaces, shall be neat in appearance and run parallel to the structural lines of the building, and suitable conduit fittings and covers shall be used. Where a single conduit run is attached to reinforced concrete walls or ceilings, it shall be fastened by lead or expansion type anchors only, using malleable iron 1-hole straps at intervals not greater than those given below.

Space Between Support Straps

<u>Conduit Size</u> (mm.)	<u>Horizontal Run</u> (m.)	<u>Vertical Run</u> (m)
20	1.50	2.0
25 and 30	1.75	2.5
over 30	2.50	2.5

Cover screws for all conduit fittings or junction boxes shall be carefully cut to length to avoid damage to wires.

At the completion of the installation, all blockages shall be cleared and all outlet and pull boxes cleaned out.

All open ends of conduit shall be capped with proper threaded caps or bushings with steel pennies immediately after installation. The use of wooden plugs will not be permitted. Empty conduit for future equipment shall be capped flush with the finished floor.

Conduit shall be of adequate size for all wires and cables which have to be pulled in. The number of wires or cable in each conduit shall not exceed the requirements of the current edition of the National Electrical Code. The pull for any group of wires shall not be so

excessive as to damage or distort them, and only an approved greaseless compound may be used to facilitate pulling.

All metallic conduit and fittings shall form a continuous bonded path and shall be grounded.

Wherever rigid conduit is to be underground, it shall be protected by 2 coats of approved bituminous paint.

Conduit runs shall be sloped to ensure suitable drainage. Conduit runs that may trap water shall be provided with drain plugs or other suitable means of draining off periodically.

Conduit shall be firmly secured at the entrance to all equipment, using 2 locknuts and a bushing, or the equivalent thereof, at each entrance.

Conduit terminations at equipment subject to vibration shall be liquid-tight, flexible type with a plastic jacket and of a length not exceeding 0.5 m.

All bends in conduit shall be made cold and the radius of bend shall not be less than 9 times the conduit diameter. No bend which flattens the conduit by more than one-tenth of its diameter shall be permitted.

All threads on conduit shall be cut neatly, the ends shall be square and the inside edge reamed smooth to remove burs.

When the number of right-angle bends in one run exceeds 3, junction or pull boxes shall be provided. In no case shall a conduit run be greater than 30 m. Pull boxes shall be used to break up longer runs.

Additional accessible pull boxes shall be installed where necessary, so that throughout the entire system wire or cables may be pulled in or withdrawn with reasonable ease.

The flexible conduit shall be secured to the rigid conduit and equipment terminal box by suitable connectors. A continuous ground shall be assured by bonding the equipment frame to the rigid conduit by a copper ground strap or by means of a bare copper conductor of size equal or larger than the equipment feeders.

The ground conductor shall be secured to the rigid conduit by a suitable grounding clamp, spiraled neatly around the flexible conduit and terminated in a suitable lug bolted to the equipment frame.

All conduit fittings and boxes for receptacles or switches in weatherproof areas, or when used on exposed conduit, shall be of cast construction, with threaded conduit hubs. Pressed steel boxes with conduit knockouts used on exposed conduit or flush fixtures in indoor areas shall be properly secured with locknuts and bushings.

Wherever encased conduit crosses a structural expansion joint, approved expansion fittings with bonding jumpers shall be provided.

S16.06 750 V WIRE AND CABLE

Conductors, cables and wires shall be provided for a complete functioning installation, and shall include for power, control and metering systems.

In addition the Contractor shall supply and install 750 V cable for main power supply of lighting system, emergency valve and reservoir water level detector which supplied by other Contractor.

All conductors shall be stranded copper minimum No.12 AWG (4 mm²) for power and No.14 AWG (2.5 mm²) for control.

All conductors shall be sized for adequate loads connected and shall limit voltage drop to 2 percent in branch feeders and 1 percent in the main feeders and also be in conformance with the National Electrical Code.

Conductors for use on 400-V and 230-V systems shall have 750-V, Insulation voltage

Conductors for use in cable tray on 400 V and 230-V systems and for all control or metering shall be multi-conductor with a PVC jacket. Power conductors contained in conduit throughout their length (lighting, etc.) may be single conductor.

Wire connectors for systems up to 6 mm² shall utilize non-solder crimp type connectors applied with a tool approved for the connector. Larger connectors shall utilize split-bolt type connectors and be insulated with 3 one-half layers of vinyl electric tape.

Wire terminations shall utilize compressor type connectors other than at locations where screw clamp connectors are provided in equipment.

All conductors shall be identified at both ends with ferrule type slip-on plastic wire markers which shall clearly identify the wire numbers in agreement with schematic and wiring diagrams.

All cables shall be identified at both ends with permanent plastic or metal tags in agreement with wiring diagrams and circuit lists.

The cables for the resistance temperature detectors shall be shielded with twisted leads and have a minimum copper section of No.16 AWG (1.5 mm²)

S16.07 CONTROL CABLES

The Contractor shall read the Drawings as a whole and make adequate provision for all conductors and connections, particularly so for the multi-conductor control cables required for interconnections between various control, metering and relaying panels in the powerhouse and control area. It shall be noted that the Drawings do not show the control and DC cables required for connections to the control, metering and relaying equipment. All control cables shall be brass shielded.

The Contractor shall supply and install the control cables for remote control, remote indication of emergency valve for penstock and control cables for reservoir water level detector and acoustic flow measuring instrument which supplied by other Contractor. The cables shall be installed from powerhouse to marshaling board in emergency valve house.

The Contractor shall supply and install the control cables with seven strands for control, metering and relaying interconnections between the equipment of powerhouse, switchyard and the control area.

The following minimum conductor sizes shall apply.

Control, instrumentation circuits	No.14 AWG (2.5 mm ²)
Current transformer circuits	No.10 AWG (6 mm ²)

All control, cables used for protection, metering and control shall have the following characteristics.

Type of installation	- cable trays
Voltage	- 750 volts
Number of conductors	- multiconductor as required (maxim 12 conductors)
Conductor size	- as required
Conductor material	- soft, annealed, tinned copper
Shielding material	- brass
Conductor insulation	- heat, moisture and ozone-resistant, cross-linked polyethylene, color coded

Conduction color sequence	Conductor	Base	Tracer
	<u>Number</u>	<u>Color</u>	<u>Color</u>
	1	black	
	2	white	
	3	red	
	4	green	
	5	orange	
	6	blue	
	7	white	black
	8	red	black
	9	green	black
	10	orange	black
	11	blue	black
	12	black	white

Outer jacket - PVC.

S16.08 STATION CLOCKS

The Contractor shall supply 4 station clocks, Quartz type.

The clocks shall be for wall mounting.

Location of clocks shall be in the control room and in the Machine Hall.

S16.09 MOTOR CONTROL CENTER (If required)

The enclosures shall be type 1 gasketed, in accordance with NEMAS ICS 1-110 Standards, indoor installation and made of steel sheet having a minimum thickness of 2.5 mm.

Module or compartment of enclosures shall be provided with a hinged door to allow full access to the inside mounted equipment, the doors shall be suitably gasketed to make the compartment dust-tight and provided with key locks.

Bus bars for power circuits shall be of copper liberally dimensioned for the specified current ratings, both short-circuit and continuous current, all joints and connections of bus bars shall be silver plated.

The phase arrangement shall be A, B, C, counting front to back, top to bottom, of left to right, as viewed from the front of the enclosure.

Each phase shall be suitably identified by marks as follows:

- Phase A - black
- Phase B - white
- Phase C - red
- Neutral - green
- earth - green/yellow

Admissible temperature rise shall be 65°C above the ambient air temperature as per NEMA ICS 2-322 Standard.

Bus supports shall be suitable for polluted atmosphere and shall be made of flame retardant material.

Each enclosure shall be provided with a copper ground bus having a minimum cross section of 100 mm².

A suitably dimensioned ground bolt can be provided instead of the ground bus for the smallest panels, boards or cabinets.

The steel structure and all metallic parts of the enclosures shall be connected to the ground bus.

Grounding terminals and connectors for 95 mm² copper ground conductor shall also be provided at either end of the ground bus.

All enclosures shall be provided with thermostatically controlled space heaters operated at 230 V 50 Hz from an external source.

Heaters shall have individual automatic miniature circuit breakers.

Each vertical section shall be provided with one space heater.

The thermostat range shall preferably be 0-50°C.

The cable entry shall be located at the bottom of the enclosures according to the actual layout.

Enclosures shall be supplied complete with cable glands. Removable plates for fitting the cable glands shall be provided preferably at bottom of the enclosures.

Suitable base channel frames complete with anchor bolts and nuts shall also supplied.

The motor control center will be used to supply the power and/or the control of 400 V motors up to 22 kW.

The motor control centers shall be class II type B in accordance with NEMA ICS 2-322 Standards.

Unless otherwise stated in the Special Technical Specifications or shown in the Contract Drawings, the power circuit of motor control centers shall have the following main characteristics:

- System three-phase, four wires, grounded neutral
- Nominal voltage 400 V
- One-minute power frequency withstand voltage 2,200 V
- Rated frequency 50 Hz
- Rated continuous current:
 - main bus bars 400 A
 - vertical buses 200 A
 - neutral bus 200 A
 - branch circuits as per the associated circuit breaker
- Rated short-time withstand current for 1 sec 35 kV (RMS symm.) plug-in contacts included

Motor control centers shall be made up of individual modules arranged in vertical sections with separations between each other.

The vertical sections shall be bolted together to form a rigid, free standing assembly of uniform and neat appearance.

The module sizes shall be multiple of one basic unit to facilitate interchangeability.

Modules of similar function shall be interchangeable.

The door of each individual module shall have a key lock and shall be so constructed that it cannot be opened when the relevant main circuit breaker is in the “ON” position.

Modules provided for motor control (Combination Motor Control Units) shall be of the fully draw-out type, i.e., contacts for power terminals on both incoming and outgoing sides shall be draw-out type.

Modules provided for non-motor loads (Feeder Tap Units) shall also be of the fully draw-out type.

Power and control terminals shall be installed close to each module and physically separated from each other.

Suitable interlocks shall be provided to prevent on-load withdrawal of draw-out type units.

When the draw-out units are taken out, suitable devices shall avoid accidental contacts with live parts. Automatically operated shutters or similar devices would be accepted.

Motor control centers are typically composed by an Incoming Feeder, some Feeder Tap Units and some Combination Motor Units as required by the Contractor’s load.

Contractor shall follow the prescriptions given here below.

The Incoming Feeder cubicle shall be of fixed type, equipped as follows:

- non-automatic molded case circuit breaker, draw-out or plug-in type;
- voltmeter with scale 0-500 V;
- Voltmeter switch to read the three line-to-line voltages upstream of main circuit breaker;
- voltage transformers 400/100 V;
- aux protective fuses.

The Feeder Tap Unit shall be draw-out type, equipped with molded case circuit breaker with built-in thermo-magnetic protective device.

Combination Motor Control Units shall be fully draw-out type. They shall consist of:

- molded case circuit breaker with built-in magnetic protective device;
- magnetic contactor (in the starters for reversing motors, two contactors mechanically and electrically interlocked shall be provided);
- auxiliary relays;
- timer relays;

- thermal overload relay;
- 400/230 V, single-phase, auxiliary transformer of adequate capacity to feed the control circuit;
- indicating lamps;
- auxiliary protective fuses.

The circuit of every Combination Motor Control Units shall include the necessary devices, contacts and/or relays for the remote signaling or draw-out not available due to operation of thermal and magnetic protective devices, control voltage loss, etc. A local indication shall also be provided by means of an indicating light with amber cap.

As a general rule, the motor control centers shall have only provisions for the signaling of motor operation.

The necessary push buttons, selector switches and/or any other necessary devices shall be supplied by the Contractor for control of the motors control center.

Control units for motors requested to re-start after a brief interruption of voltage supply shall be equipped with the necessary relays and/or devices.

The Contractor shall be fully responsible for the good coordination of equipment supplied under his scope of work.

Particular care shall be applied in coordinating the equipment for combination motor control units in order to protect the contractors and thermal overload relays in case of short circuit faults.

To provide facility for inclusion of interlocks, the motor control circuits shall be developed with suitably located breaks provided on the terminal block and bridged up with jumpers.

When requested, the Contractor shall supply the auxiliary relay required to multiply the auxiliary contacts of the main equipment, in order to reproduce the approved schematic diagrams.

S16.10 SURGE TANK WATER LEVEL TRANSMITTER

One Fore Bay water transmitters shall be provided. The transmitter shall sense the Fore Bay water level to the control room. A digital readout shall be provided in the control room to show the actual elevation of the water column in meters. All electronics, panels, and any special shielded cables shall be included in the supply.

S16.11 TELEPHONE SYSTEM (Not Applicable)

(1) Exchange

- (a) A Private Automatic Exchange (PAX) of not less than 6 direct line and 20 lines extension capacity shall be installed in the Power Station Control Room with extensions listed in paragraph (f) below.
- (b) The exchange shall conform to current design standards, emphasis being placed on maintenance and fault clearance by replacement of plug-in printed circuit boards. For this reason it is essential that the exchange should be of a type already in use in Thailand and supported by adequate manufacture's service facilities. One spare card of each type use including ring and tone generators shall be provided.
- (c) The exchange shall be powered by the Power Station 125 VDC battery.
- (d) The exchange shall be provided with an operator's console installed in the control room.
- (e) The exchange shall have the following facilities:
 - (i) priority cut-in on selected extension;
 - (ii) barred access on selected extension to outgoing calls on tie circuits;
 - (iii) conference facilities ; and
 - (iv) two both-way dialing tie circuit connection for further use.
- (f) The location of the extension telephones shall be as follows:

LOCATION	TELEPHONE TYPE	ADDITIONAL EQUIPMENT	Qty
Office	Desk		1
Diesel Room	Heavy duty industrial	Noise concealing mic. acoustic shield. Loud ringing bell.	1
Machine Bays	Heavy duty industrial	Noise canceling mic. acoustic shield. Loud ringing bell.	2
Main Transformer Bay	Heavy duty industrial	Noise canceling mic. Weatherproof acoustic shield. Loud ringing bell	1
Residence	Desk		6
Control Room	Operator's Console		1

- (g) The Contractor shall supply and install as above specified and also wiring, cabling, conduits to make the completed system and proper functions.

S16.12 TESTS

In addition to the equipment tests specified elsewhere, the following tests of the electrical equipment shall be conducted when the installation is complete, but prior to commissioning.

- Check direction of rotation of all motors and reverse connection, if necessary.
- Check all motors for correct clearances and alignment and for correct lubrication. Lubricate in accordance with manufacturer's instructions.
- Megger all bus ways, cables and control connections to prove insulation resistance is of acceptable value. minimum acceptable resistance is 1 megaohm.
- Check each motor controller and contractor before placing same in continuous service, and make adjustments as required. Check all overload relay ratings and breaker trip settings. Check all control, interlocking and instrument wiring for proper operation.
- Provide a tabulated list of all overload relay heaters and fuses installed and their various locations.
- Test each lighting control and power circuit with 1,000-V megger for short circuits, improper grounds, insulation and operation. Each panel shall be tested with mains disconnected from the feeder, branch circuits connected and switches closed, all fixtures in place and permanently connected, lamps removed or omitted from the sockets and all wall switches closed.
- Test feeders with the feeders disconnected from the branch circuit panels. Each individual power equipment connected for proper operation. In no case shall the insulation resistance be less than 1 megaohm.

Where tests indicate that the insulation was damaged by handling or during installation, such wires and cables shall be repaired or replaced at no cost to the client.

- Prove correct operation of surge tank water level transmitter.
- Prove correct operation of single side band transceiver with antenna.
- Prove correct operation of telephone system.

S16.13 HV CABLE END TREATING MATERIAL

The HV cable end treating material shall be used for indoor and outdoor end treatment of 3.3 kV and 24 kV cross linked polyethylene insulated power cables described in the preceding clause.

The end treatment shall conform to the applicable requirements of ICEA Standards 5-66-524.